


DETAIL B  
SCALE 2 : 1

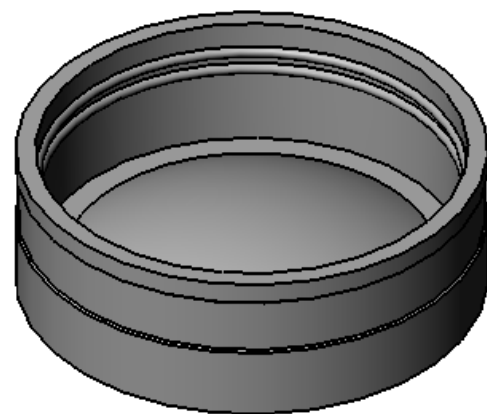

NOTES:  
- SOME HIDDEN LINES NOT SHOWN  
- BREAK ALL SHARP CORNERS  
- REPORT ALL CHANGES TO ENGINEERING

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERNCO, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FERNCO, INC. IS PROHIBITED.

Part Weight	
Min/Max Temp.	-30/140 Degrees F
Pressure Tested	4.3 PSI
Material	Flexible PVC
Installation Torque	60" Lbs.
Conforms to ASTM	D5926
Box Quantity	40
Clamps used	300 Series



300 S. DAYTON ST.  
DAVISON, MI 48423  
PH: 810-653-9626  
FAX: 810-654-2616

TOLERANCES:  
.X= Fractional ±  
.XX= ±.02  
.XXX= ±.030  
ANG.= ±0.5°  
UNLESS OTHERWISE SPECIFIED

DESCRIPTION:		Cap 4" Plastic	
		QC-104	
UNITS:	SIZE	DESIGNER:	SCALE
INCHES	A	D. Brady	not to scale
3RD ANGLE PROJECTION DO NOT SCALE DRAWING		CHECKER:	DATE: 8/3/2007
		SHEET 1 OF 1	