



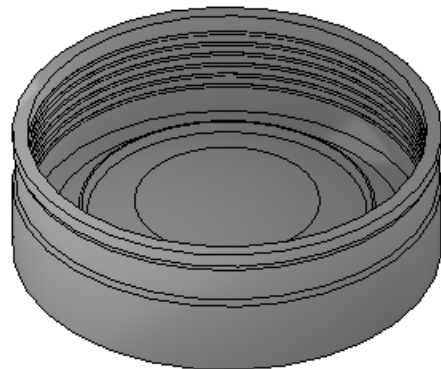

NOTES:
 - SOME HIDDEN LINES NOT SHOWN
 - BREAK ALL SHARP CORNERS
 - REPORT ALL CHANGES TO ENGINEERING

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERNCO, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FERNCO, INC. IS PROHIBITED.

Part Weight	
Min/Max Temp.	-30/140 Degrees F
Pressure Tested	4.3 PSI
Material	Flexible PVC
Installation Torque	60" Lbs.
Conforms to ASTM	D5926
Box Quantity	40
Clamps used	300 Series

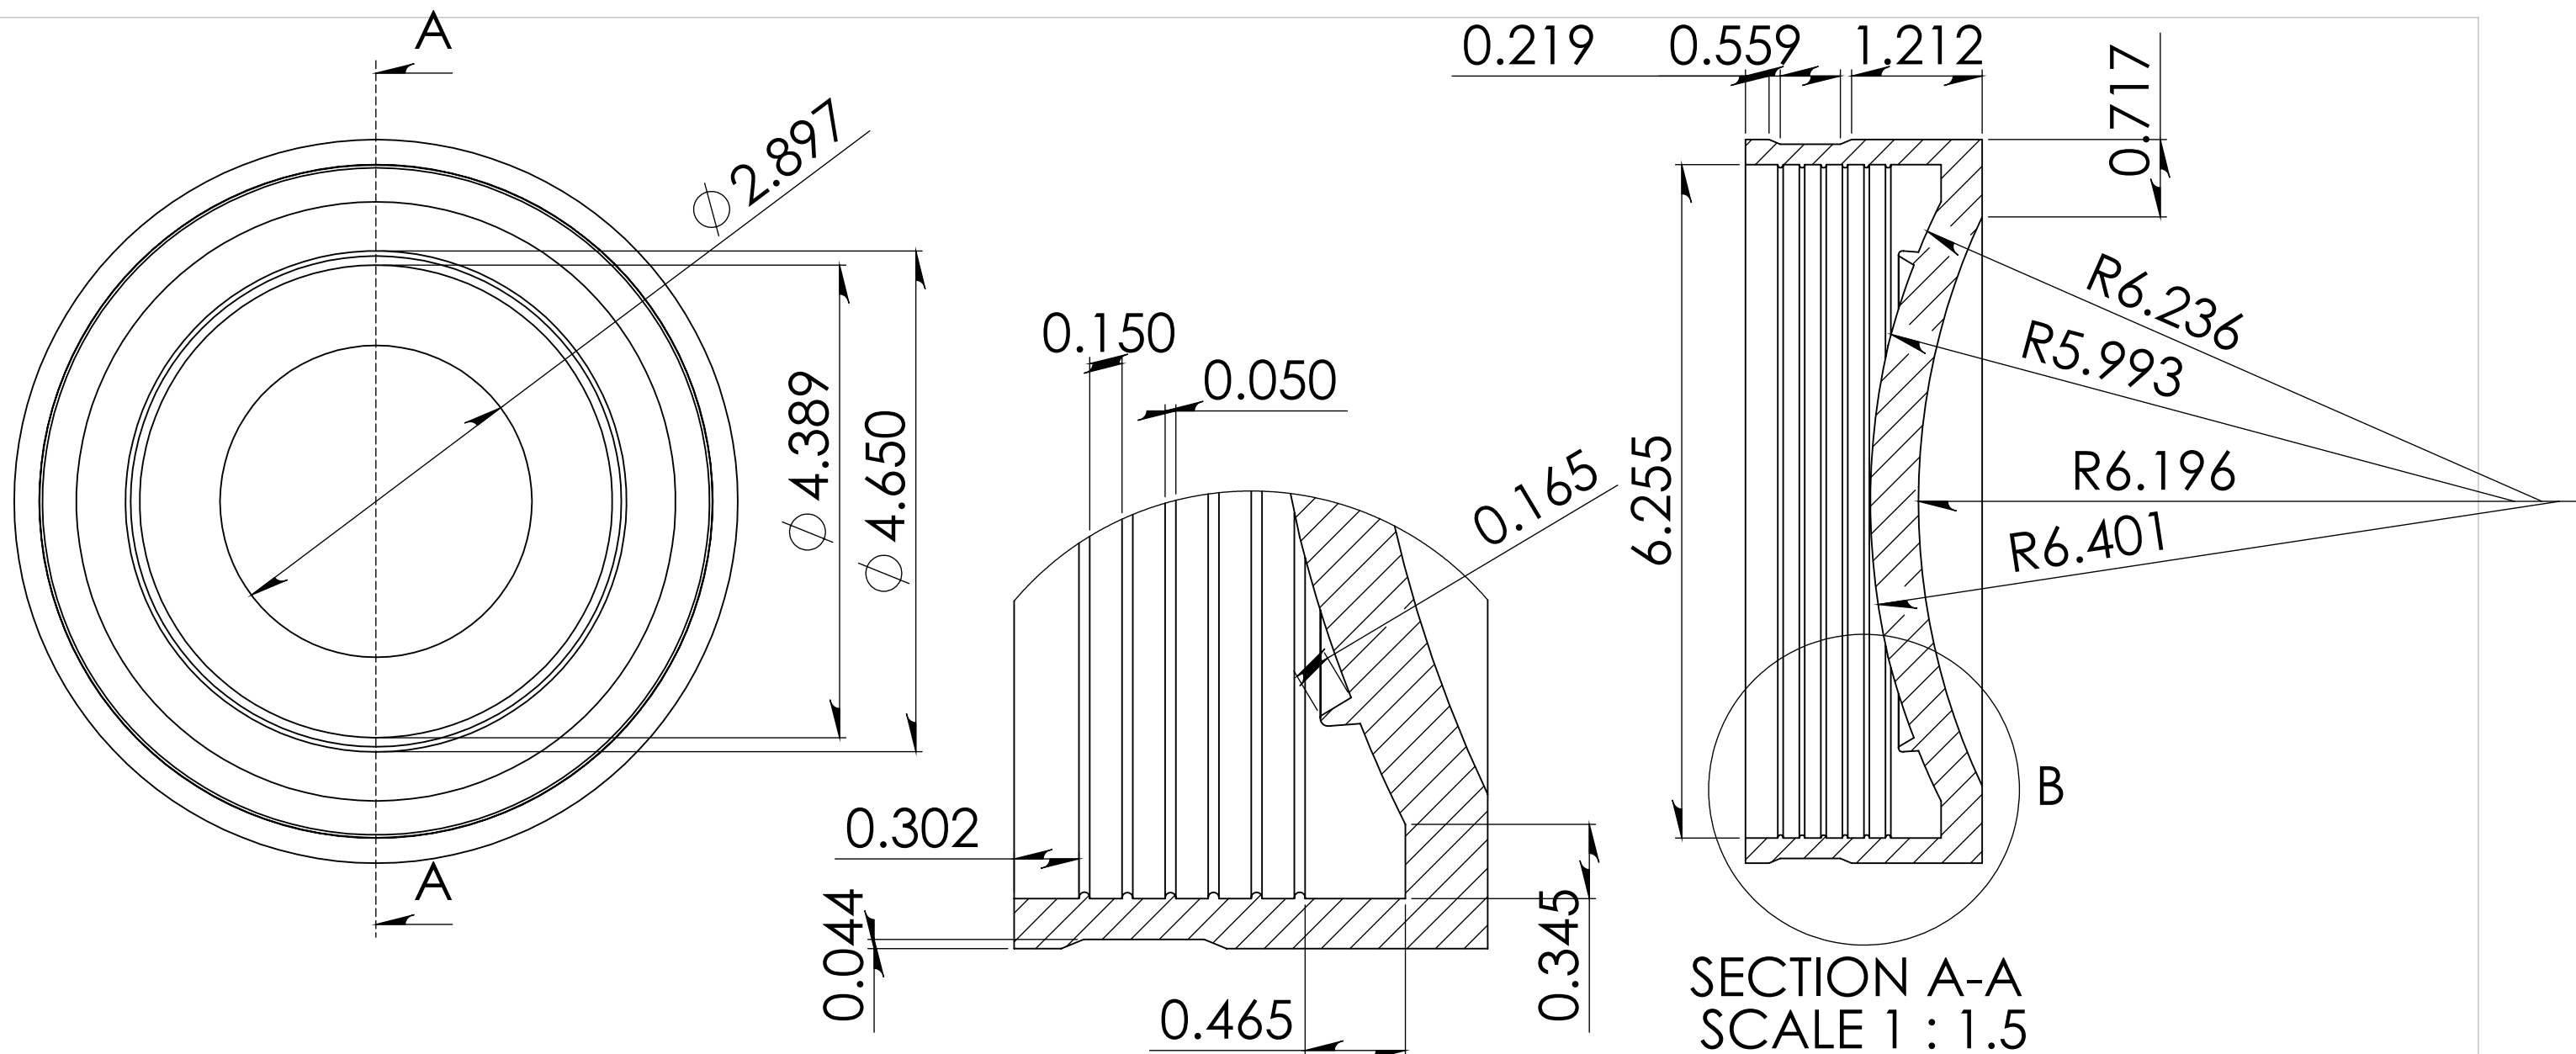

300 S. DAYTON ST.
 DAVISON, MI 48423
 PH: 810-653-9626
 FAX: 810-654-2616

TOLERANCES:
 .X= Fractional $\pm$
 .XX= $\pm .02$
 .XXX= $\pm .030$
 ANG.= $\pm 0.5^\circ$
 UNLESS OTHERWISE SPECIFIED

DESCRIPTION:		Cap 6" Plastic	
		QC-106	
UNITS:	SIZE	DESIGNER:	SCALE
INCHES	A	D. Brady	not to scale
3RD ANGLE PROJECTION DO NOT SCALE DRAWING		CHECKER:	DATE: 6/1/2009
		SHEET 1 OF 1	