
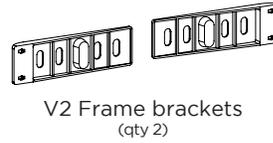


# 8-Outlet Mountable Surge Protector

SKU: PDC006

UPLIFT DESK




## Package Contents

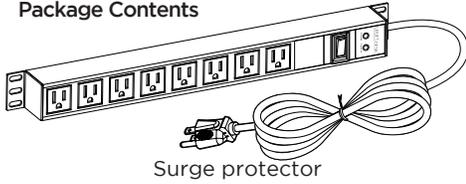

-  #10x5/8" wood screw (qty 4)
-  M5x6 machine screw (qty 4)
-  M5 washers (qty 4)
-  M8x8 machine screw (qty 4)
-  M8 washers (qty 4)

There are three ways to mount the Surge protector to your UPLIFT V2 Standing Desk frame in order to accommodate various UPLIFT Desk accessories (see "Option 1"). If you do not have an UPLIFT V2 frame, you can mount the Surge protector directly to your desktop in two different ways (see "Option 2" and "Option 3").

## Option 1: Mounting to your UPLIFT Desk with the V2 Frame brackets

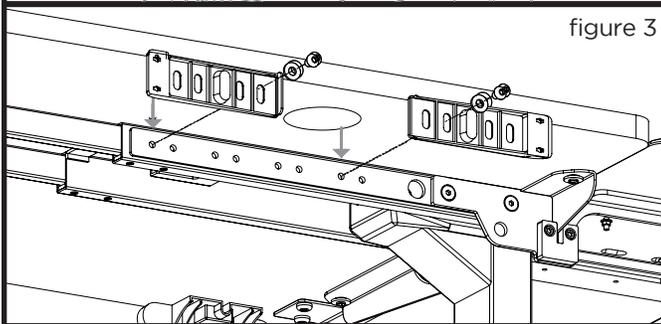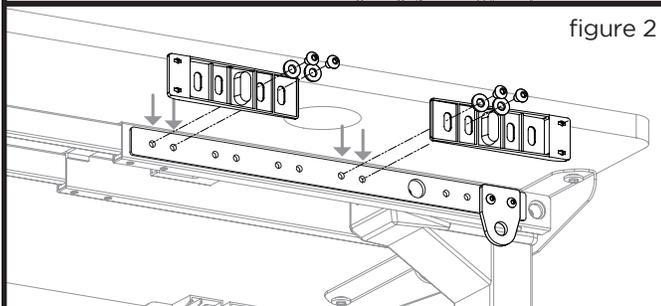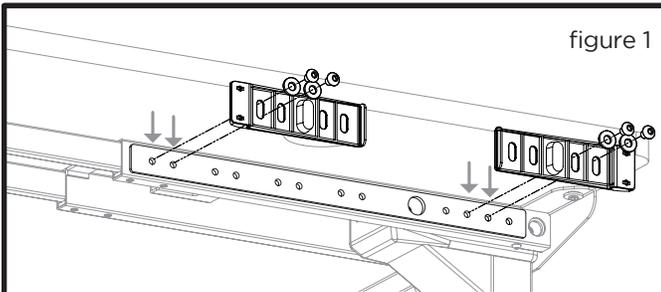

### Step 1

There are multiple locations on the UPLIFT V2 Standing Desk frame where the Surge protector can be mounted using the V2 Frame brackets. These various locations allow for the addition of other accessories to your desk frame.

Figure 1 shows the mounting location that places the Surge protector as close as possible to end of the desk. This location also covers the remaining mounting points on the V2 frame. Attach the V2 Frame brackets in the orientations shown to the desk frame using four M8x8 machine screws and four M8 washers in the locations indicated by the arrows. Note which holes in the brackets the screws are being inserted through in the figure.

Figure 2 shows the mounting location which allows room for the attachment of an Anchor Plate (included with desk frame) for use with a desk hammock or other accessory. Attach the brackets in the orientation shown using four M8x8 machine screws and four M8 washers in the holes indicated by the arrows.

Figure 3 shows the mounting location required if you are also using a Desk Extension (sold separately) on the same side of the desk as you are mounting the Surge protector. In this mounting location, you will be using only one M8x8 machine screw and one M8 washer per V2 Frame bracket. Note which holes in the bracket and frame are being used.

The Surge protector can be mounted in the locations described above, on the left or right side of the frame. We recommend mounting the Surge protector on the back side of the frame, but you can also mount it the front of the frame if desired..


### Step 2

Once you've got the V2 Frame brackets attached in the desired location, line up the Surge protector and attach using four M5x6 machine screws and four M5 washers where shown.

Once mounting is complete, plug the Surge protector into a 120V power outlet and plug in the cords to your devices.

Once all cords are plugged in, and your wire management is complete, press the red power switch on the Surge protector. When the Surge protector is on, the power switch will be illuminated. We recommend using UPLIFT Desk wire management products to keep your cables secure.

## Option 2: Mounting directly to your desk with no brackets

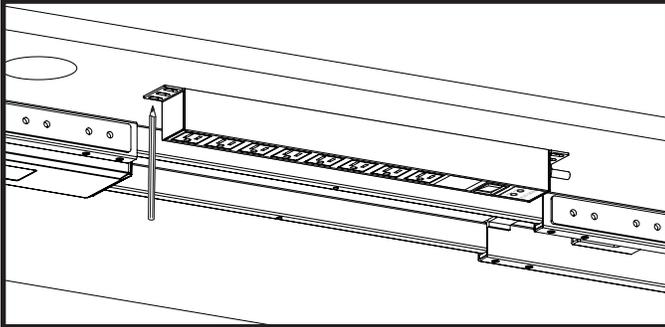


### Step 1

You can attach the Surge protector directly to your desktop.

Figure out where you'd like to mount your Surge protector. You can place it anywhere: front or back, but we recommend locating it near the back of the desk to keep cords away from your legs.



Hold the Surge protector where you'd like to attach it and make a mark in the center of the four mounting slots with a pencil.

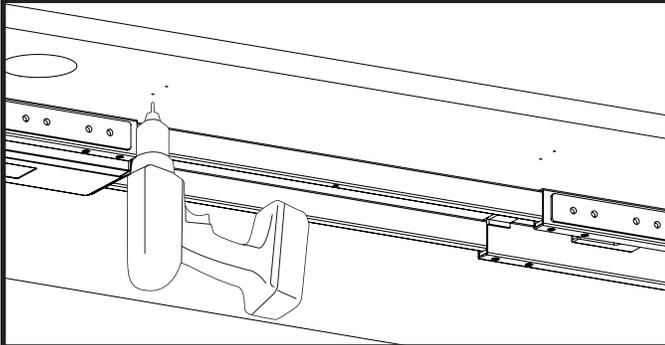

### Step 2

If you own a drill, you can make this a little easier by drilling pilot holes where you've made your pencil marks using a 1/8" diameter bit.

**Note:** DRILL NO DEEPER THAN 1/2" because that will increase the risk of drilling through your desktop. We recommend wrapping a piece of tape around your drill bit 1/2" from the tip. Stop drilling just before the tape touches the desktop.

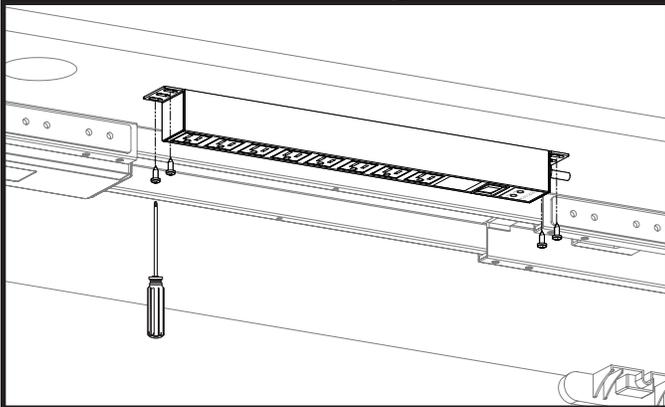


### Step 3

Attach Surge protector to the desk using the four #10x5/8" wood screws provided.

Once mounting is complete, plug the Surge protector into a 120V power outlet and plug in the cords to your devices. We recommend using UPLIFT Desk wire management products to keep your cables secure.


Once all cords are plugged in, and your wire management is complete, press the red power switch on the Surge protector. When the Surge protector is on, the power switch will be illuminated.

## Option 3: Mounting to your desk with the Desktop brackets

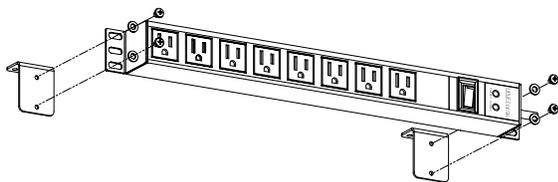

### Step 1

Connect the Desktop brackets to your Surge protector as shown using the four M5x6 machine screws and M5 washers.

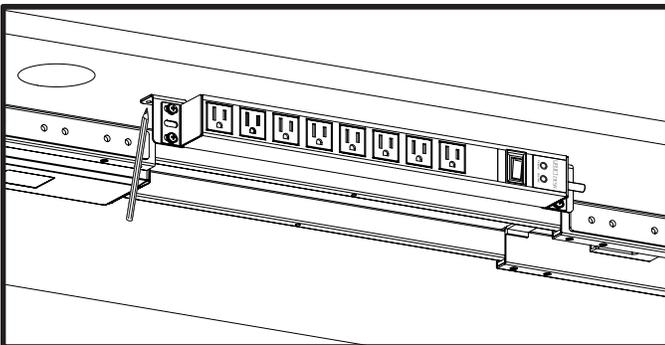


### Step 2

Figure out where you'd like to mount your Surge protector. Once again, you can mount the Surge protector anywhere in the front or back of your desktop, but we recommend locating it near the back of the desk.

Hold the Surge protector where you'd like to attach it and make a mark in the center of the four bracket mounting holes with a pencil.



### Option 3: Mounting to your desk with the Desktop brackets (continued)

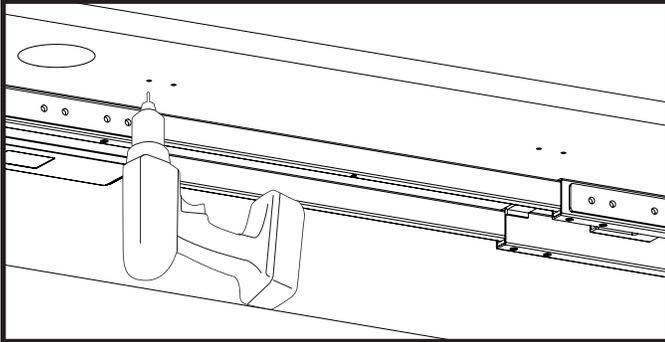

#### Step 3

If you own a drill, you can make this a little easier by drilling pilot holes where you've made your pencil marks using a 1/8" diameter bit.

**Note:** DRILL NO DEEPER THAN 1/2" because that will increase the risk of drilling through your desktop. We recommend wrapping a piece of tape around your drill bit 1/2" from the tip. Stop drilling just before the tape touches the desktop.

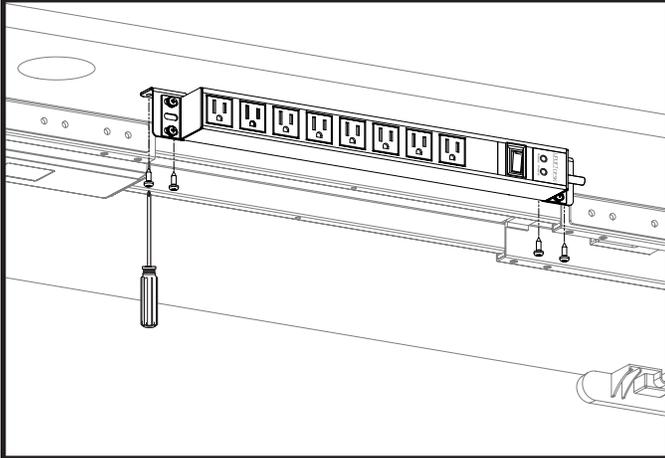


#### Step 4

Attach the assembly to the desk using the four #10x5/8" wood screws provided.

Once mounting is complete, plug the Surge protector into a 120V power outlet and plug in the cords to your devices. With this mounting option, the cords from your devices will be facing towards the front, rear or sides of your desk depending on the location you chose. We recommend using UPLIFT Desk wire management products to keep your cables secure and organized.

Once all cords are plugged in, and your wire management is complete, press the red power switch on the Surge protector. When the Surge protector is on, the power switch will be illuminated.

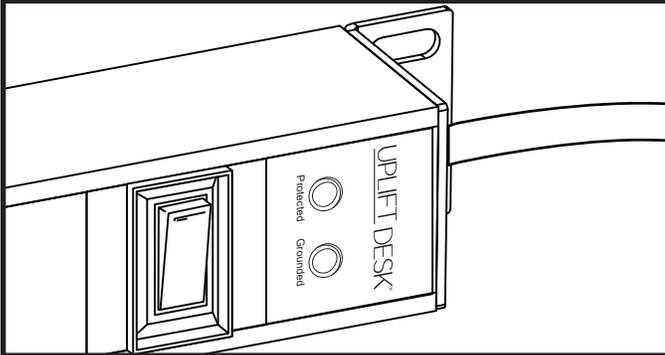

**Note:** The 8-Outlet Mountable Surge Protector is equipped with two LEDs near the power switch. One LED is labeled as "Grounded" and indicates that your equipment is properly grounded. The unit uses the connection to ground to divert surges of electricity and protect your equipment.

The LED marked "Protected" indicates that the surge protector is protecting your equipment against surges of electricity. If this light goes out, your equipment is no longer protected and the surge protector needs to be replaced.

#### ⚠ CAUTIONS & WARNINGS

- ⚠ **CAUTION:** Read all instructions before assembly. Failure to assemble or operate properly may result in damage or personal injury. Retain manual for future reference.
- ⚠ **CAUTION:** To avoid overheating and possible damage to this product and other equipment, do not use to power a device which exceeds the designed ratings.
- ⚠ **CAUTION:** This product must be installed and/or used in accordance with the appropriate electrical codes and regulations.
- ⚠ **WARNING:** Avoid getting any liquid on the unit, as it can cause shock & fire. If unit gets wet, disconnect the power at the circuit breaker, fuse or outlet. Ensure the unit is completely dry before connecting this product to a power source.
- ⚠ **WARNING:** Do not attempt to perform any maintenance on this device. Please call UPLIFT Desk if product is not working as intended. Hazardous voltages are present inside the unit during operation.
- ⚠ **CAUTION:** The Surge protector needs a path to ground for safety and to work properly, and should only be plugged directly into a grounded outlet. Using any extension cord in conjunction with this Surge protector will void all UPLIFT warranties.

# UPLIFT DESK<sup>®</sup>

Work Better. Live Healthier

512-614-3152

800-349-3839

info@upliftdesk.com

upliftdesk.com

## SAVE THESE INSTRUCTIONS

Study this manual carefully. If this product is sold, please provide this manual to the buyer, installers, or support personnel operating the product.



**Copyright Notice:** This guide is a component of this UPLIFT Desk accessory. This guide is a part of the scope of delivery, even if the item is resold. This guide is also available on the UPLIFT Desk website: [upliftdesk.com](http://upliftdesk.com). Excerpts or copies may not be forwarded to third parties or used in any other published form without the prior written consent of UPLIFT Desk. These instructions are subject to United States copyright law.