


SAFETY ENGINEERED HOIST RINGS

STAINLESS STEEL

- Material: 300 Series Stainless Steel
- Design Factor: 5:1
- Range of Movement: Swivel 360°, Pivot 180° Under Load
- NDT: Liquid Penetrant Tested Per ASTM-E 1417
- Purification Process: Clean & Passivate Per ASTM-A967
- Typical Applications: Use Stainless for Corrosive, Cryogenic or Elevated Temperature Environments
- All dimensions approximate - variations do not affect use or design factor
- Each Individually Serial Numbered



Part No.	Rated Load (lbs)	A	B	C	D	E +/- .12	F	G	H	J	K	L	M	TL* (ft-lbs)	Weight (lbs)
29050	275	.43	1.61	.71	3/8	.54	2.67	1/4-20	1.84	1.00	.75	.17	1.33	2.5	5 oz.
29051	400	.43	1.61	.71	3/8	.29	2.67	5/16-18	1.84	1.00	.75	.17	1.27	3.5	5 oz.
29052	400	.43	1.61	.71	3/8	.54	2.67	5/16-18	1.84	1.00	.75	.17	1.27	3.5	5 oz.
29053	500	.43	1.61	.71	3/8	.54	2.67	3/8-16	1.84	1.00	.75	.17	1.21	6	5 oz.
29301	1250	.70	2.40	.93	1/2	1.04	3.77	1/2-13	2.58	1.49	1.25	.20	1.84	14	1 lb
29004	1250	.88	3.25	1.22	3/4	.78	4.78	1/2-13	3.52	1.99	1.50	.16	2.31	14	2 lb. 5 oz
•29322	1250	.88	3.25	1.22	3/4	.78	6.72	1/2-13	3.52	1.99	1.50	.16	4.25	14	2 lb. 12 oz
29005	1250	.88	3.25	1.22	3/4	1.03	4.78	1/2-13	3.52	1.99	1.50	.16	2.31	14	2 lb. 5 oz
•29323	1250	.88	3.25	1.22	3/4	1.03	6.72	1/2-13	3.52	1.99	1.50	.16	4.25	14	2 lb
29006	1250	.88	3.25	1.22	3/4	1.28	4.78	1/2-13	3.52	1.99	1.50	.16	2.31	14	2 lb. 5 oz
•29324	1250	.88	3.25	1.22	3/4	1.28	6.72	1/2-13	3.52	1.99	1.50	.16	4.25	14	2 lb. 12 oz
29001	2000	.88	3.25	1.22	3/4	.78	4.78	5/8-11	3.52	1.99	1.50	.16	2.18	30	2 lb. 7 oz
29002	2000	.88	3.25	1.22	3/4	1.03	4.78	5/8-11	3.52	1.99	1.50	.16	2.18	30	2 lb. 7 oz
•29320	2000	.88	3.25	1.22	3/4	1.03	6.72	5/8-11	3.52	1.99	1.50	.16	4.12	30	2 lb. 14 oz
29003	2000	.88	3.25	1.22	3/4	1.28	4.78	5/8-11	3.52	1.99	1.50	.16	2.18	30	2 lb. 7 oz
•29321	2000	.88	3.25	1.22	3/4	1.28	6.72	5/8-11	3.52	1.99	1.50	.16	4.12	30	2 lb. 14 oz
29007	2500	.88	3.25	1.22	3/4	1.03	4.78	3/4-10	3.52	1.99	1.50	.16	2.06	50	2 lb. 9 oz
•29325	2500	.88	3.25	1.22	3/4	1.03	6.72	3/4-10	3.52	1.99	1.50	.16	4.00	50	3 lb
29009	2500	.88	3.25	1.22	3/4	1.53	4.78	3/4-10	3.52	1.99	1.50	.16	2.06	50	2 lb. 9 oz
•29327	2500	.88	3.25	1.22	3/4	1.53	6.72	3/4-10	3.52	1.99	1.50	.16	4.00	50	3 lb
29102	3500	1.40	4.80	1.71	1"	1.04	6.52	3/4-10	5.14	3.00	2.37	.24	3.06	50	6 lb. 10 oz
•29329	3500	1.40	4.80	1.71	1"	1.04	8.11	3/4-10	5.14	3.00	2.37	.24	4.65	50	7 lb. 4 oz
29103	3500	1.40	4.80	1.71	1"	1.54	6.52	3/4-10	5.14	3.00	2.37	.24	3.06	50	6 lb. 10 oz
•29330	3500	1.40	4.80	1.71	1"	1.54	8.11	3/4-10	5.14	3.00	2.37	.24	4.65	50	6 lb. 10 oz
29101	4000	1.40	4.80	1.71	1"	1.04	6.52	7/8-9	5.14	3.00	2.37	.24	2.93	80	6 lb. 12 oz
•29328	4000	1.40	4.80	1.71	1"	1.04	8.11	7/8-9	5.14	3.00	2.37	.24	4.52	80	6 lb. 12 oz
29105	5000	1.40	4.80	1.71	1"	1.29	6.52	1"-8	5.14	3.00	2.37	.24	2.81	115	7 lb
•29331	5000	1.40	4.80	1.71	1"	1.29	8.11	1"-8	5.14	3.00	2.37	.24	4.40	115	7 lb
29106	5000	1.40	4.80	1.71	1"	1.54	6.52	1"-8	5.14	3.00	2.37	.24	2.81	115	7 lb
•29332	5000	1.40	4.80	1.71	1"	1.54	8.11	1"-8	5.14	3.00	2.37	.24	4.40	115	7 lb
29107	5000	1.40	4.80	1.71	1"	2.29	6.52	1"-8	5.14	3.00	2.37	.24	2.81	115	7 lb
•29333	5000	1.40	4.80	1.71	1"	2.29	8.11	1"-8	5.14	3.00	2.37	.24	4.40	115	7 lb
29401	7500	1.75	6.00	2.11	1-1/4	1.89	8.73	1-1/4"-7	6.50	3.76	3.20	.35	4.12	235	14 lb
29202	12000	2.25	8.00	2.81	1-3/4	2.70	12.47	1-1/2"-6	8.55	4.87	4.20	.47	6.41	400	33 lb. 12 oz
†29200	15000	2.25	8.00	2.81	1-3/4	2.96	12.47	2"-4-1/2	8.55	4.87	4.20	.47	5.41	400	36 lb
†29501	25000	3.00	10.50	4.09	2-1/4	4.00	16.87	2-1/2"-8	11.67	6.52	5.75	1.12	8.03	1050	87 lb. 8 oz
†29503	25000	3.00	10.50	4.09	2-1/4	4.00	16.87	2-1/2"-4	11.67	6.52	5.75	1.12	8.03	1050	87 lb. 8 oz
†29600	37500	3.75	13.00	5.27	2-3/4	5.20	19.50	3"-4	14.15	8.10	7.25	1.00	8.48	2150	166 lb
†29701	50000	4.00	14.50	6.06	3-1/4	7.00	22.09	3-1/2"-4	15.90	8.60	7.75	1.09	9.28	3300	240 lb


† Supplied with stud and nut

* Recommended Torque Load

SAFETY ENGINEERED HOIST RINGS STAINLESS STEEL/METRIC



- Hoist Ring Material: 300 Series Stainless Steel
- Design Factor: 5:1
- Range of Movement: Swivel 360°, Pivot 180° Under Load
- NDT: Liquid Penetrant Tested Per ASTM-E 1417
- Purification Process: Clean & Passivate Per ASTM-A967
- Typical Applications: Use Stainless for Corrosive, Cryogenic or Elevated Temperature Environments
- Each Individually Serial Numbered

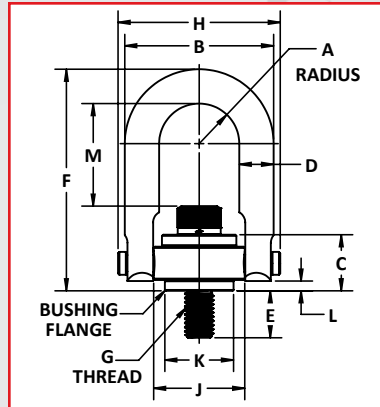

Part No.	Rated Load (kg)	A	B	C	D	E +/- 3.0	F	G	H	J	K	L	M	TL* (Nm)	Weight (kg)
29808	200	10.9	40.9	18.0	9.5	17	67.8	M8 x 1.25	46.7	25.4	19.1	4.3	32.1	4.75	0.14
29810	225	10.9	40.9	18.0	9.5	17	67.8	M10 x 1.5	46.7	25.4	19.1	4.3	30.2	8.0	0.14
29812	525	22.4	82.5	31.0	19.0	19	121.4	M12 x 1.75	89.4	50.5	38.0	4.1	59.4	18.5	1.05
•29814	525	22.4	82.5	31.0	19.0	19	170.6	M12 x 1.75	89.4	50.5	38.0	4.1	108.6	18.5	1.27
29816	950	22.4	82.5	31.0	19.0	24	121.4	M16 x 2.0	89.4	50.5	38.0	4.1	55.4	40.0	1.11
•29818	950	22.4	82.5	31.0	19.0	24	170.6	M16 x 2.0	89.4	50.5	38.0	4.1	104.4	40.0	1.33
29820	1100	22.4	82.5	31.0	19.0	30	121.4	M20 x 2.5	89.4	50.5	38.0	4.1	51.4	67.5	1.16
•29821	1100	22.4	82.5	31.0	19.0	30	170.6	M20 x 2.5	89.4	50.5	38.0	4.1	100.6	67.5	1.38
29822	1500	35.6	121.2	43.4	25.4	29	165.8	M20 x 2.5	130.5	76.2	58.7	6.1	77.0	67.5	3.06
•29823	1500	35.6	121.2	43.4	25.4	29	206.7	M20 x 2.5	130.5	76.2	58.7	6.1	117.9	67.5	3.77
29824	2100	35.6	121.2	43.4	25.4	34	165.8	M24 x 3.0	130.5	76.2	58.7	6.1	73.0	155.5	3.18
•29826	2100	35.6	121.2	43.4	25.4	34	206.7	M24 x 3.0	130.5	76.2	58.7	6.1	113.9	155.5	3.89
29830	2250	35.6	121.2	43.4	25.4	54	165.8	M30 x 3.5	130.5	76.2	58.7	6.1	67.0	155.5	3.30
•29832	2250	35.6	121.2	43.4	25.4	54	206.7	M30 x 3.5	130.5	76.2	58.7	6.1	109.9	155.5	4.01
29840	3500	44.5	152.4	53.6	31.8	46	221.7	M30 x 3.5	165.1	95.5	81.3	8.9	106.3	318.6	6.36
†29842	3500	44.5	152.4	53.6	31.8	66	221.7	M30 x 3.5	165.1	95.5	81.3	8.9	106.3	318.6	6.70
†29850	5500	57.2	203.2	71.4	44.5	69	316.7	M36 x 4.0	217.2	123.7	106.7	11.9	164.8	542.7	15.34
†29852	6250	57.2	203.2	71.4	44.5	79	316.7	M42 x 4.5	217.2	123.7	106.7	11.9	158.8	542.7	15.91
†29854	7250	57.2	203.2	71.4	44.5	79	316.7	M48 x 5.0	217.2	123.7	106.7	11.9	152.8	542.7	16.36
†29860	11000	76.2	266.7	104.0	57.2	102	428.5	M64 x 6.0	296.4	165.6	146.1	28.4	203.3	1423.7	39.77

† Supplied with stud and nut

* Recommended Torque Load

• Long Bar Models

NOTE: DIMENSIONS ARE IN MILLIMETERS