

Products To Pull You Through The Tough Jobs



# Lineman's Hoists

## Exclusive Features— Trust The Reliable Leader

**Get A Grip** on Little Mule's Lineman's Hoists. They incorporate the latest design technology to *pull you through the toughest jobs*. These reliable hoists boast features exclusive to Little Mule, that you, the linesman, requested.

- **Capacities** — Rated loads of 1500 and 2000 lbs. - single line; 3000 and 4000 lbs. - double line.
- **Overload Feature** — Solid fiberglass handle, with replaceable tips, bends to alert the operator of possible overload.
- **High-Strength Polyester Web Strap** — Self-storing for compact operation.
- **Fast Webbing Take-Up** — Nonconductive winding wheel provided for quick take-up or positioning of slack webbing.
- **Double Interlocking Pawls & Dual Pawl Springs** — Ensure positive load control in all environments and precise load positioning.
- **Stainless Steel Springs & Shafts** — Corrosion resistant for long service life and dependability.
- **Bronze Bushings** — All rotating shafts are mounted on bronze bushings for smooth operation and reduced wear.
- **Open Frame Construction** — Allows for easy cleaning and inspections.
- **Hooks and Gate Latches** — All hooks swivel 360° and are equipped with latches; optional hooks and gate latches can be added to tackle specific applications.
- **Easily Removed Sheave Block** — Utilizing a quick disconnect pin design. Converts hoist for single line use.
- **Exceeds The Test** — Meets ANSI/ASME Standard B-30.21; designed with a 4:1 factor and individually tested at 125% of rated load.

Redesigned  
Cast  
Aluminum  
and Zinc  
Alloy Body  
Parts

Insulated  
Fiberglass  
Handle

Polyester  
Web Strap

Made In USA

Lineman's Hoists • Single & Double Line  
1500 - 4000 Lbs.

### S P E C I F I C A T I O N S

Model Number	SINGLE LINE			DOUBLE LINE			Web Strap Length (Ft.)	Handle Length (In.)	Ship Weight (Lbs.)
	Capacity (Lbs.)	Lift (Ft.)	Hook to Hook (Min.) (In.)	Capacity (Lbs.)	Lift (Ft.)	Hook to Hook (Min.) (In.)			
322B	1500	14	20	3000	7	23	15	24	11 1/2
322DA	1500	14	20	3000	7	23	15	24	12
322CB	1500	14	23	3000	7	27 1/2	15	24	11 1/2
322DHB	1500	14	22	3000	7	26	15	24	12
344B	2000	11	20	4000	5 1/2	23	12	30	11 1/2
344DB	2000	11	20	4000	5 1/2	23	12	30	12
344CB	2000	11	23	4000	5 1/2	27 1/2	12	30	11 1/2
344DHB	2000	11	22	4000	5 1/2	26	12	30	12

DB Includes Hot Stick Rings on All Hooks, Control Surfaces.

CB Includes Swivel-Type Gate Latch on All Hooks.

DHB Includes Hot Stick-Type Gate Latches on All Hooks as well as Hot Stick Rings on All Hooks, Control Surfaces.

## CHOICE OF HOOKS



### Standard Hook

Heat-treated, forged steel hooks provide lasting strength and durability. Hooks will bend open under extreme overload situations, but will not break. Safety latches are standard.



### Hot Stick Hook

Hot stick hooks have a welded ring for use with holding sticks. Safety latches are standard.



### Swivel Gate Hook


Bullard-type, swivel gate latch provides positive locking action for secure load holding in all environments.



### Hot Stick Hook & Gate Latch

Hot stick gate latch models have rings on the latch and the hook for use on energized lines. Holding sticks easily maneuver the latch and hooks.

## DIMENSIONAL DRAWING

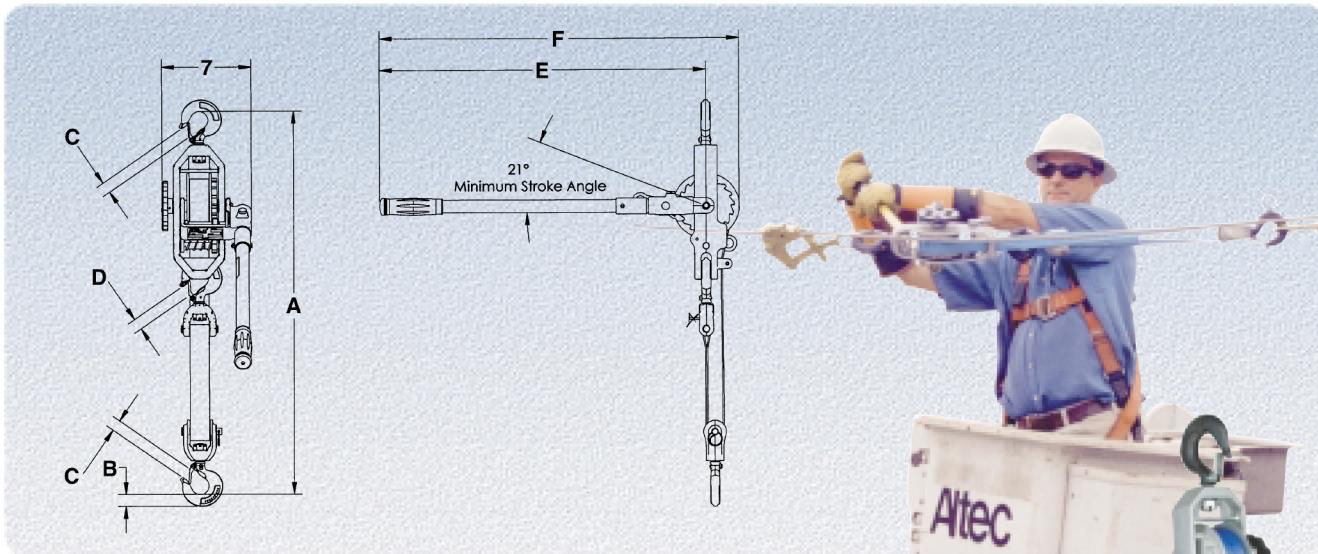

Model Number	A SingleLine	A DoubleLine	B	C	D	E*	F*
322B	20	23	0.875	0.875	0.875	25	27.5
344B	20	23	1	1	0.875	31	33.5

Note: All dimensions in Inches

\* For hotstick Models add 1.5" to dimension E and F

*Products To Pull You Through The Tough Jobs*



## WARNING

Overloading and Improper Use Can Result In Injury

### To Avoid Injury:

- Do not exceed working load limit, load rating, or capacity.
- Do not use to lift people or loads over people.
- Use only alloy chain and attachments for overhead lifting.
- Read and follow all instructions.

**WESTECH RIGGING SUPPLY**  
Call Toll Free: 800-442-7475

Call Us or Visit Our Stores:  
Monday-Friday, 8:00am - 5:30pm Pacific



Visit Us Online at: [www.WestechRigging.com](http://www.WestechRigging.com)

4140 West 11th Avenue  
Eugene, Oregon 97402

2439 McGilchrist St SE  
Salem, Oregon 97302