Models 82

CUSTOMER FAVORITE

Heavy-Duty C-Hook

With capacities from 5 to 50 tons, this C-hook is built to perform. A mill favorite, the standard design shows up and does the work every day. Need customizations like padding for coil protection, other capacities, or something else? Call 800.628.4263 to talk about your application.

Product Features:

- Designed for heavy-duty applications
- High-tensile alloy steel plate reduces physical size and weight
- Counterbalanced to hang level when empty
- Inside radius on hooks avoid coil edge contact
- Curved coil saddle is standard
- Guide handles for ease of hook positioning
- Handles a wide range of coil widths
- Available with optional padding for additional coil protection
- Complies with ASME standards

WARNING Center of the hoist and bail must be in-line with the load's center of gravity.

Customize with SmartSpec online configurator.
Go to: caldwellinc.com/smartspec

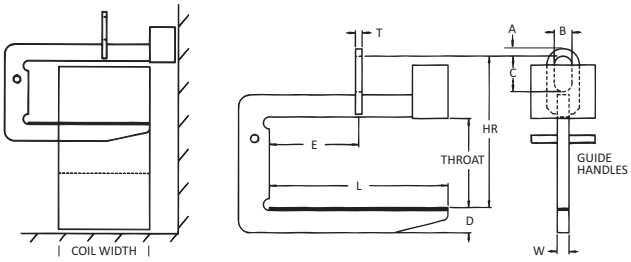

NOTE: E = Maximum coil width ÷ 2

Model Number	Capacity (tons)	Dimensions (in.)											Weight (lbs.)
		Coil Width		Throat	Lifting Arm			HR Headroom	Bail Dimensions				
									Opening			Thk. T	
		Max.	Min.		Length L	Depth D	Width W		A	B	C		
82-5-36	5	36	24	24	30	5.54	4	37.5	1-1/2	4	7	1-1/4	438
82-5-48		48	30	24	39	6.125	4	38	1-1/2	4	7	1-1/4	564
82-5-60		60	36	24	48	6.8	4	38.75	1-1/2	4	7	1-1/4	724
82-7 1/2-36	7-1/2	36	24	24	30	5.9	4	37.75	1-1/2	4	7	1-1/2	615
82-7 1/2-48		48	30	24	39	6.6	4	38.5	1-1/2	4	7	1-1/2	805
82-7 1/2-60		60	36	24	48	7.2	4	39.2	1-1/2	4	7	1-1/2	980
82-10-48	10	48	30	24	39	7.6	4	41.5	2	5	9	1-3/4	968
82-10-60		60	36	24	48	7.5	4	41.375	2	5	9	1-3/4	1295
82-10-72		72	42	24	57	8.8	4	42.6	2	5	9	1-3/4	1712
82-15-48	15	48	30	30	39	7.4	4	47.25	2	5	9	1-3/4	1457
82-15-60		60	36	30	48	8.2	4	48	2	5	9	1-3/4	1908
82-15-72		72	42	30	57	8.9	4	48.75	2	5	9	1-3/4	2330
82-20-60	20	60	36	30	48	9.4	4	52.25	2-1/4	6	12	2	2307
82-20-72		72	42	30	57	10.4	4	53.25	2-1/4	6	12	2	2832
82-25-60	25	60	36	34	48	9.3	4	58	2-1/2	6	14	2-1/4	3109
82-25-72		72	42	34	57	10.13	4	58.9	2-1/2	6	14	2-1/4	3928
82-30-60	30	60	36	34	48	10	4	58.75	2-3/4	6	14	2-1/2	3400
82-30-72		72	42	34	57	10.9	4	59.7	2-3/4	6	14	2-1/2	3882
82-40-72	40	72	42	38	57	11.4	5	68.14	3-1/4	7	18	3	5850
82-50-84	50	84	48	45	64-1/2	13.13	6	77	3-3/4	7	18	3	8685

Other sizes available, consult factory.