

IPBK10



For the transfer and stacking of steel beams

- IPVUZ / IPVZ: Available in capacities of 0.75 through 1.5 metric tons.
- IPVUZ / IPVZ: Jaw openings available: 0 to 0.81”.
- IPBK10: Available in capacities of 0.5 through 4 metric tons.
- IPBK10: Jaw openings available: 0.2 to 1.13”.
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Company name (Crosby IP), logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Minimum WLL of 10% of Maximum WLL.
- Maintenance and repair kits are available.
- For use with materials with a plate surface hardness to 279HV10, only 5% min WLL is needed.

IPVZ





Load Rated

Model IPBK10

Model	Working Load Limit (t)*	Stock No.	Weight Each (lb)	Dimensions (in)									
				Jaw A	B	C	D	E	F	G	H	J	
IPBK10	0.5	2703931	5.29	0.19 - 0.63	1.69	5.28	8.50	1.77	4.72	1.89	1.77	0.39	
IPBK10	1	2703837	5.73	0.19 - 0.63	1.69	5.98	9.06	1.77	4.84	1.85	1.77	0.39	
IPBK10	2	2703838	16.1	0.19 - 1.00	2.44	8.78	13.43	2.76	7.80	2.40	2.76	0.63	
IPBK10	4	2703839	37.3	0.19 - 1.13	2.95	11.10	16.97	3.94	9.13	3.07	2.83	0.79	

Design Factor based on EN 13155 and ASME B30.20.

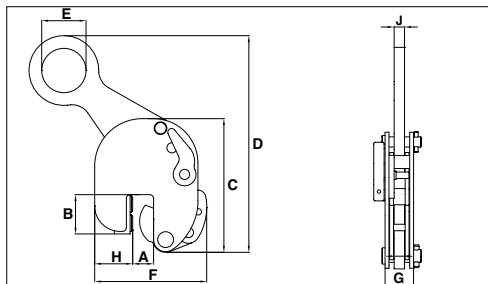

Model IPVUZ: Universal Hoisting Eye / Model IPVZ: Fixed Hoisting Eye

Model	Working Load Limit (t)*	Stock No.	Weight Each (lb)	Dimensions (in)									
				Jaw A	B	C	D	E	F	G	H	K	
IPVUZ	0.75	2705146	5.07	0 - 0.63	1.02	5.12	8.50	1.57	4.53	1.65	1.18	0.43	
IPVUZ	1.5	2705147	15.21	0 - 0.81	2.17	7.87	14.88	2.76	7.87	2.40	2.52	0.63	
Fixed Hoisting Eye													
IPVZ	0.75	2705096	3.75	0 - 0.63	1.02	5.12	7.99	1.57	4.53	1.65	1.18	0.43	
IPVZ	1.5	2705097	13.01	0 - 0.81	2.17	7.87	13.35	2.76	7.09	2.40	2.52	0.63	

* Design Factor based on EN 13155 and ASME B30.20.

