### Product



Crosby® S-3319 Swivel Hook Synthetic Ropes

#### WESTECH RIGGI

Visit Us Online at: www.WestechRigging.com Call Us Toll Free at: 800-442-7475

Call Us or Visit Our Stores: Monday - Friday, 8:00am - 5:30pm Pacific Salem, Oregon 97302

4140 West 11th Avenue

Eugene, Oregon 97402

#### From:







#### **Purpose**

Develop a line of swivels for use with synthetic rope in the utility market.





#### **Product Information**

- ✓ Hooks are:
  - Forged alloy steel
  - Quenched & Tempered



Finish is our baked on red powder coat paint





- ✓ Capacities available
  - 1.63, 2.5 & 4.5 Metric Tonnes
- ✓ Synthetic rope sizes available
  - 9/16" to 1-1/16"
  - 14mm to 27mm
- ✓ Design Factor of 5 to 1
- ✓ Can be proof tested to two (2) times the Working Load Limit.



Working	Synthetic		Hook
Load Limit	Rope Size	Weight	I.D.
(t)	(in.)	(lbs.)	Code
1.63	9/16 - 5/8	4.2	Н
2.50	3/4 - 13/16	8.0	1
4.50	7/8 - 1-1/16	15.0	J

Working Load Limit	Synthetic Rope Size	Weight	Hook I.D. Code
1.63	(mm) 14 - 16	( <b>kg.</b> ) 1.90	H
2.50	19 - 21	3.62	I
4.50	22 - 27	6.80	J





- Utilizes spool & shield designed to:
  - Protect rope
  - Keep the rope positioned correctly in spool
  - Provides wider rope bearing surface resulting in an increased area for load distribution
  - Reduces rope abrasion



#### **Product Information**

Design of hook provides needed overhaul weight.





#### **Product Information**

✓ All hooks incorporate Crosby's patented QUIC-CHECK<sup>®</sup> markings.



Hoist hooks incorporate markings forged into the product which address two (2) **QUIC-CHECK®** features.










### **Product Information**



Deformation Indicators -- Two strategically placed marks, one just below the shank or eye and the other on the hook up, which allows for a QUIC-CHECK® measurement to determine if the throat opening has changed, thus indicating abuse or overload.



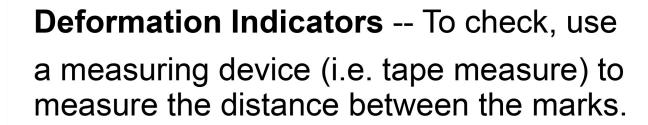

- The marks should align to either an inch or half-inch increment on the measuring device.
- If the measurement does not meet this criteria, the hook should be inspected further for possible damage.







### **Product Information**

Angle Indicators -- Indicates the maximum included angle 90 degrees, which is allow between two (2) sling legs in the hook. These indicators also provide the opportunity to approximate other included angles between two sling legs.





#### **Product Information**

✓ Utilizes standard Crosby<sup>®</sup> 319N shank hooks featuring a low profile, interlocking hook tip.



 Designed to utilize Crosby S-4320 integrated latch



- ✓ Latch is standard feature
  - Each hook is equipped with a Crosby<sup>®</sup> S-4320 heavy duty stamped latch with high cycle, long life spring.







#### **Product Information**

✓ When secured with the proper cotter pin through the hole in the tip of hook, the hook meets the intent of OSHA Rule 1926.550 (g) for personnel hoisting.



#### **Product Information**

Each Crosby<sup>®</sup> hook contains a "forged in" Frame code, just below the shank.

 The code is used for easy reference to aid in the selection of the hook's proper latch size.

