






Distributed By  
**WESTECH RIGGING SUPPLY**  
 Visit Us Online at: [www.WestechRigging.com](http://www.WestechRigging.com) 4140 West 11th Avenue  
 Eugene, Oregon 97402  
 Call Us Toll Free at: 800-442-7475 2439 McGilchrist St SE  
 Salem, Oregon 97302  
 Call Us or Visit Our Stores: Monday - Friday, 8:00am - 5:30pm Pacific

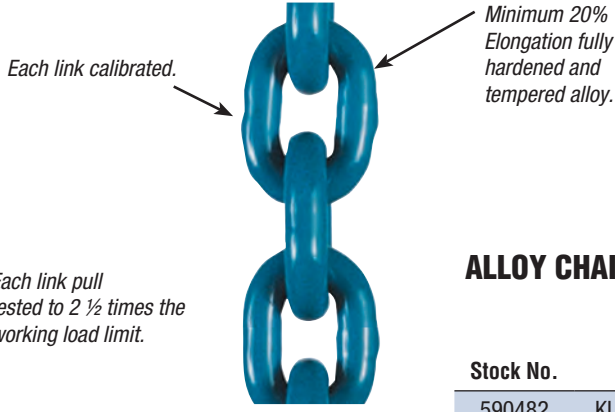


**KLA/KLB**

Each link pull tested to 2 1/2 times the working load limit.

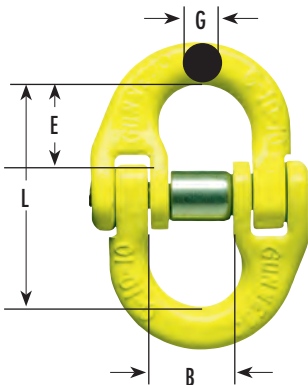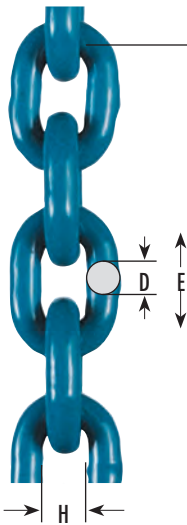

Heat number identification allows full product traceability.

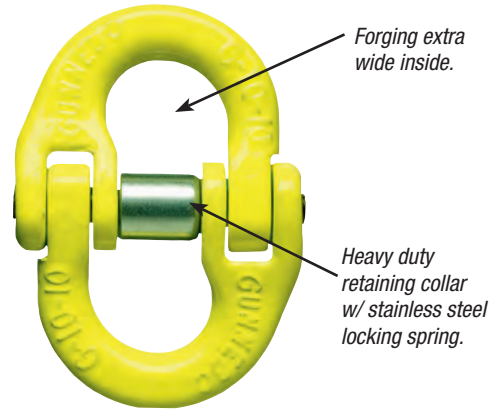

**G-LINK**

## ALLOY CHAIN GRADE 80 & 100 - KLA/KLB

Stock No.	Model	Chain Size In.	Grade	Working Load Limit *(Lbs)	Dimensions (Inches)			Lbs. per ft.	Weight 100 Ft. (Lbs)
					D	E	H		
590482	KLB-7-10	9/32"	100	4,300	0.28	0.83	0.41	0.77	77
590405	KLA-7-10	9/32"	100	4,300	0.28	0.83	0.41	0.77	77
590407	KLA-8-10	5/16"	100	5,700	0.32	0.94	0.45	0.97	97
590408	KLB-10-10	3/8"	100	8,800	0.40	1.2	0.57	1.5	151
590409	KLA-10-10	3/8"	100	8,800	0.40	1.2	0.57	1.5	151
590410	KLB-13-10	1/2"	100	15,000	0.52	1.5	0.72	2.5	253
590411	KLA-13-10	1/2"	100	15,000	0.52	1.5	0.72	2.5	253
590413	KLA-16-10	5/8"	100	22,600	0.65	1.9	0.91	3.9	394
590414	KLA-20-10	3/4"	100	35,300	0.81	2.4	1.1	6.3	632
589899	KLA-22-10	7/8"	100	42,700	0.87	2.6	1.2	7.9	793
589900	KLA-26-10	1"	100	59,700	1.02	3.1	1.5	9.8	981
530795	KLB-32-8	1 1/4"	80	72,300	1.3	3.8	1.7	15.5	1,545

\* Design Factor 4:1 Grade Embossed minimum each foot.  
 KLA is powder coated blue chain  
 KLB is painted black chain

## ALLOY COUPLING LINKS - G

Stock No.	Model	Chain Size In.	Grade	Working Load Limit *(Lbs)	L	Dimensions (Inches)		E	Weight Each (Lbs.)
						B	G		
589672	G-7-10	9/32"	100	4,300	2.2	0.71	0.35	0.87	0.44
589674	G-8-10	5/16"	100	5,700	2.2	0.71	0.35	0.87	0.44
589675	G-10-10	3/8"	100	8,800	2.7	1.0	0.47	1.0	0.66
589676	G-13-10	1/2"	100	15,000	3.5	1.1	0.59	1.3	1.5
545104	G-16-8	5/8"	80	18,100	4.1	1.4	0.75	1.6	2.6
589677	G-16-10	5/8"	100	22,600	4.1	1.4	0.75	1.6	3.1
545105	G-18/20-8	3/4"	80	28,300	4.9	1.7	0.87	1.9	4.4
589679	G-20-10	3/4"	100	35,300	4.9	1.7	1.0	1.9	5.7
545106	G-22-8	7/8"	80	34,200	6.0	2.0	0.94	2.3	6.6
589680	G-22-10	7/8"	100	42,700	6.0	2.0	1.0	2.3	7.7
545107	G-26-8	1"	80	47,700	6.3	2.3	1.1	2.4	10.1
589681	G-26-10	1"	100	59,700	6.3	2.3	1.3	2.4	12.6
545109**	G-32-8	1-1/4"	80	72,300	7.9	2.8	1.5	3.1	19.0

\* Design Factor 4:1 Proof tested and certified.

\*\* Available only in the traditional Classic yellow color

