


Forged Weldless Links

- Drop Forged Steel
- Heat Treated
- 5:1 Safety Factor


Oblong Master Links Alloy Steel

Size "A" (in)	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in.)	
			B	C
1/2	7,000	.82	2.50	5.00
5/8	9,000	1.52	3.00	6.00
3/4	12,300	2.07	2.75	5.50
7/8	15,000	3.50	3.75	6.38
1	24,360	4.85	3.50	7.00
1-1/4	36,200	9.57	4.38	8.75
1-1/2	54,300	16.22	5.25	10.50
1-3/4	84,900	25.22	6.00	12.00
2	102,600	37.04	7.00	14.00

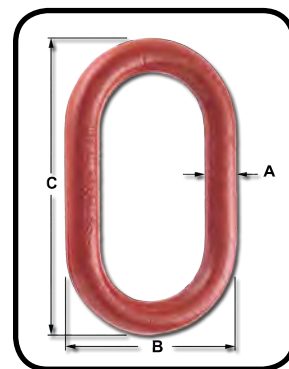

Pear Shaped Sling Links Carbon & Alloy Steel

Size "A" (in)	WLL Carbon (lbs)	WLL Alloy (lbs)	Weight Each (lbs)	Dimensions (in.)	
				B	C
3/8	1,800	---	.23	2.25	1.50
1/2	2,900	7,000	.55	3.00	2.00
5/8	4,200	9,000	1.06	3.75	2.50
3/4	6,000	12,300	1.88	4.50	3.00
7/8	8,300	14,000	2.75	5.25	3.50
1	10,800	24,300	4.35	6.00	4.00
1-1/4	16,750	36,000	7.60	7.75	5.00
1-3/8	20,500	---	11.30	8.25	5.50



Round Rings Carbon Steel

Size "A" (in)	Working Load Limit (lbs)	Weight Each (lbs)	Inside Diameter (in)
5/8 x 3	3,300	0.95	3.00
3/4 x 4	5,600	1.68	4.00
7/8 x 4	7,200	2.72	4.00
7/8 x 5-1/2	5,600	3.47	5.50
1 x 4	10,800	3.69	4.00
1-1/8 x 6	10,400	6.60	6.00
1-1/4 x 5	17,000	6.82	5.00

