


# WIRE ROPE PULLERS

## PRODUCT DETAILS

- Load tested to 125% of rated capacity
- Meets all applicable ANSI/ASME standards
- Can be operated in any position or direction

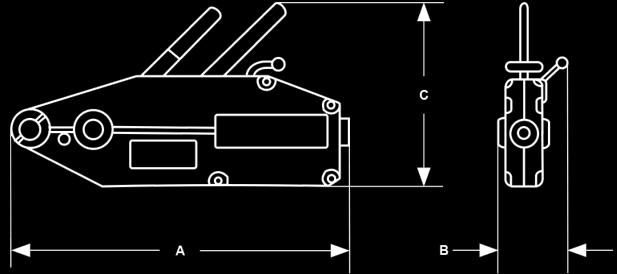

## ACCESSORIES

WIRE ROPE: Standard lengths of 33' and 65' (custom lengths available)

MODEL	WRP075C	WRP150C	WRP300C
SIZE (TONS)†	3/4	1 1/2	3
LIFTING CAPACITY (LBS)	1,760	3,525	7,050
ROPE ADVANCE PER FULL STROKE (IN)	2.0	2.2	1.1
ROPE DIAMETER (IN)	5/16	7/16	5/8
STANDARD WIRE ROPE LENGTH (FT)	33 & 65	33 & 65	33 & 65
NET WEIGHT (LBS) (W/HANDLE)	20	36	58
HANDLE LENGTH (IN)	32.5	47.5	47.5
PULLING EFFORT AT RATED CAPACITY (LBS)	64	93	99
A (IN)	17.0	21.5	26.0
B (IN)	2.5	3.8	4.5
C (IN)	9.0	10.3	12.5

†Metric ton rated



WIRE ROPE\*


\* Wire rope not included standard, available per request

# MAGNA® Wire Rope Puller

## Operating Instructions

- To release the jaws, hold reversing lever (2) and release lever (3) together with one hand, pull lever (1) forward slightly at the same time pushing (2) and (3) forward until release lever (3) slips into notched position in casing.
- Insert the tapered end of the wire rope into the rope entry (4) and push through until it extends through the outlet. The wire rope end may have to be pushed up or down slightly to clear the hook or fitting at forward end.
- Pull the wire rope through by hand to take up the slack to the load and ensure that the exit is not obstructed.
- Push the release lever (3) down, it will spring back into original position. The jaws are now closed on the wire rope.
- Place the telescopic handle on either (1) or (2) depending upon whether forward or reverse action is required, and crank the operating lever forward and backward evenly.
- Return the release lever to "release" position when not in use.

**WARNING: DO NOT USE TO LIFT OR SUSPEND PERSONNEL. THIS UNIT IS NOT MAN-RATED.**

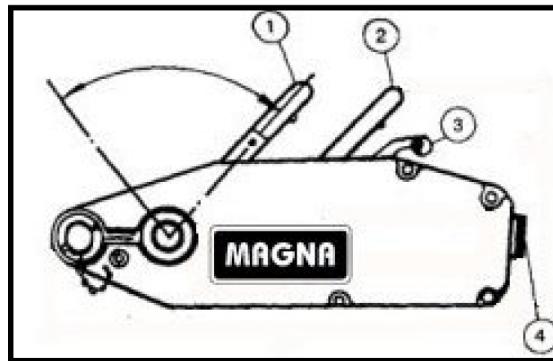

- Remove dirt and grit from wire rope and winch.
- Do not use wire rope that is kinked or damaged.
- Keep inside parts properly lubricated with oil.

MAGNA Lifting Products, Inc.



**WESTECH RIGGING SUPPLY**  
Call Toll Free: 800-442-7475

Call Us or Visit Our Stores:  
Monday - Friday, 8:00am - 5:30pm Pacific

Distributed By

Visit Us Online at: [www.WestechRigging.com](http://www.WestechRigging.com)

4140 West 11th Avenue  
Eugene, Oregon 97402

2439 McGilchrist St SE  
Salem, Oregon 97302