

CERTIFIED LIFTING TONGS

To help decrease the risk of dropped or broken poles and logs, the utility industry relies on these tongs that are certified for lifting versus standard skidding tongs. Their tong-shaped design provides a secure grip.

FEATURES & BENEFITS

HIGH STRENGTH AND DURABILITY

Tongs are made from upset-forged round micro-alloy steel for optimum tensile strength and durability.

CERTIFIED FOR LIFTING


All Dixie certified lifting tongs are proof loaded to 2 times the working load limit then affixed with a permanent metal identification tag. Written certification is also supplied at time of shipment.

CORROSION PROTECTION

Tongs are painted orange for protection against corrosion in harsh environments and for easy identification on the job site.

SECURE ATTACHMENT AND SUPPORT

Lifting tongs are supported by either a screw pin shackle or nut & bolt safety shackle with a ring.

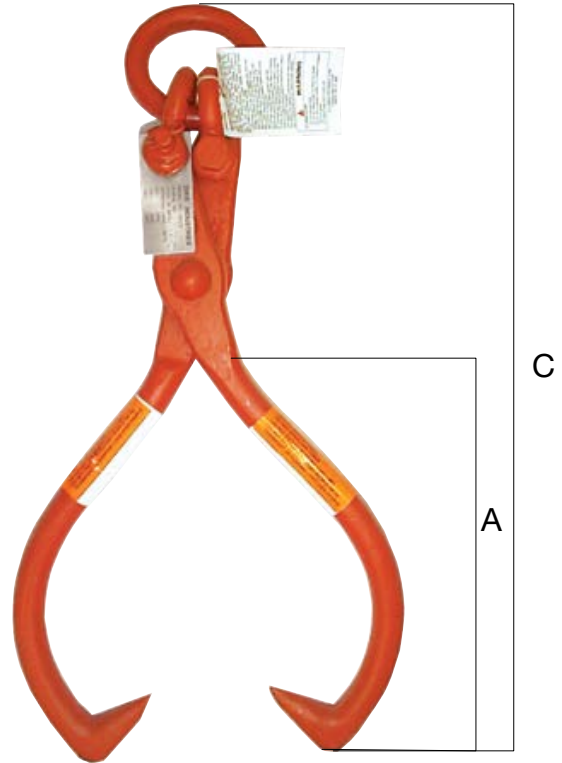

SPECIFICATIONS

Item #	Material Diameter & Maximum Opening (in.)	Close Height "A" (in.)	Overall Height "C" (in.)	Attachment/Support Type		Working Load Limit (WLL) at Degree of Opening						Approx. Weight (lbs.)
						75°		135°		180°		
				Shackle Size (in.)	Ring Size (in.)	Jaw Open (in.)	WLL (lbs.)	Jaw Open (in.)	WLL (lbs.)	Jaw Open (in.)	WLL (lbs.)	
40008	3/4 x 16	7	18-3/4	3/8 N/B*	5/8 x 2-3/4	3-3/8	1,500	12	1,000	16	750	7.0
40218	1 x 20	9	23-1/4	1/2 N/B	3/4 x 3	4	2,500	17	2,000	20	1,500	16.5
40228	1 x 25	10	25-1/4	1/2 N/B	3/4 x 3	4-1/2	2,500	20	2,000	25	1,500	17.0
40458	1-1/4 x 32	14	31	5/8 N/B	7/8 x 3-1/4	7	3,000	27	2,500	32	2,000	36.0
40558	1-1/2 x 36	16	37-3/4	3/8 N/B	1 x 4	7-1/2	5,000	32	4,000	36	3,000	50.5

Warning: Do not exceed the working load limit. The WLL decreases as you increase the size of the jaw opening. Do not heat tongs to sharpen points. Do not exceed maximum rated capacity.

*NB= nut and bolt