


## HSWI / Eye Sling Hook

A high grade stainless steel hook that is drop-forged and stamped. The compact design of the hook ensures the highest possible load capacity while maintaining a minimum product weight. The hook provides impact protection for the safety latch, a large hook mouth and an extra-wide hook point to prevent accidental hooking into the chain. Due to the flat section on the eye, the hook is also compatible with alternative connecting systems.

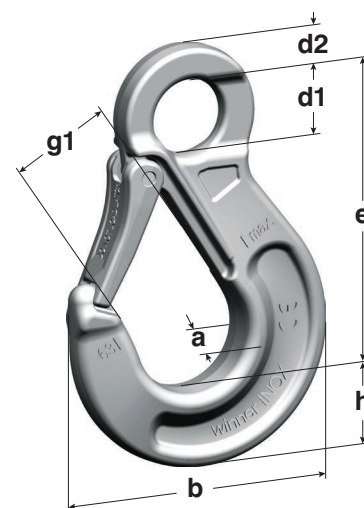


Code	Size	WLL (90° - 60°) (lb)	e (inch)	h (inch)	a (inch)	d1 (inch)	d2 (inch)	g1 (inch)	b (inch)	Weight (lbs/pc)
HSWI 5/6-6	3/16" - 7/32"	2,000	3.31	0.79	0.55	0.83	0.31	0.87	2.64	0.55
HSWI 7/8-6	9/32" - 5/16"	3,500	4.41	1.14	0.79	1.06	0.51	1.26	3.86	1.54
HSWI 10-6	3/8"	5,500	5.24	1.30	1.10	1.46	0.59	1.54	4.53	2.98
HSWI 13-6	1/2"	9,300	6.77	1.69	1.38	1.89	0.71	2.00	5.79	5.73
HSWI 16-6	5/8"	13,900	8.39	2.00	1.73	2.17	0.94	2.60	7.17	10.69

Number close to code reflects the size of chain used in combination with product.

## PWI / Parallel Hook

This parallel hook serves as a shortening hook for shortening chain legs. The special design of the chain support enables an optimal interaction between chain and hook. A reduction of the chain sling's load capacity is not necessary when shortening of chain legs to desired length is performed.

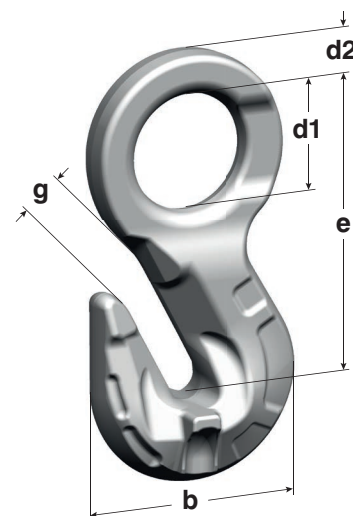

Code	Size	e (inch)	b (inch)	d1 (inch)	d2 (inch)	g (inch)	Weight (lbs/pc)
PWI 5/6-6	3/16" - 7/32"	2.56	1.73	0.96	0.35	0.28	0.44