

pewag

STRONG
IS NOT
ENOUGH
www.pewag.com

pewag levo hook LH

The evolution of load handling

the
next
generation
of hooks



pewag levo hook LH

Increased efficiency, improved safety and reliability

A new generation of lifting devices

The manual process of attaching and releasing hooks requires a great deal of time and resources. Automation is the key, that's where pewag provides an answer!

The pewag levo hook LH is the all-in-one solution for efficient work processes, worker safety, and satisfied employees. The use of our TÜV-certified levo hook improves the work cycle time while reducing risks to the user and the load.

Thanks to its powerful features, the pewag levo hook LH allows for automated attaching and releasing of loads. It supports operators in difficult working conditions, for instance when working at height or in hazardous conditions.

In the workplace, operator safety should be the top priority at all times. The pewag levo hook LH makes this a reality. Operated by secure radio-control, the levo hook swivels to allow for quick and efficient hook up and release of the load without manual assistance, when equipped with the optional magnet.

Innovative. Reliable. Radio-controlled.

- Reduces manpower, loads no longer need to be attached and removed manually
- Accidental opening of the pewag levo hook is not possible
- Provides operator support when working at elevated heights or underground
- Withstands temperatures that put a strain on the user (-4°F to 140°F / -20°C to 60°C)
- Minimizes hazards and exposure risks from odorless gases, radiation, and other unknown conditions



Safe & Secure (ISO 13849)

Accidental opening of the levo hook under load is not possible, there is a secured communication between the hook and the remote control. Design Factor 4:1 - for reference purposes only



pewag quality

Patented tool-free locking of the rotation lock, tool-free initial mounting, TÜV-certified, pewag know-how




Complete range of services

On-the-job and e-learning training, pewag expert support and repair, USA based



Cost and time savings thanks to expedited work processes

Up to 8,000 operating cycles without a break, hook opens and closes within 2.5 seconds

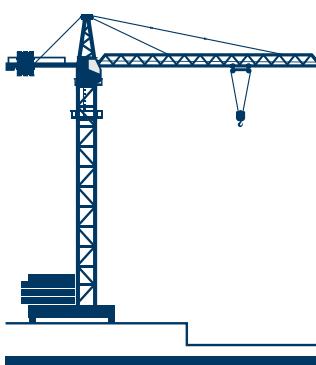

Basic configuration.



Practical remote



Charging station

Optional equipment.



Magnetic module
with sensor
for automatic load pickup




Lighting module
fully illuminates work area



pewag levo manager
comprehensive software
**Optional weighing
module available**



Multiloading Adapter
to operate up to 10 charging stations in one line

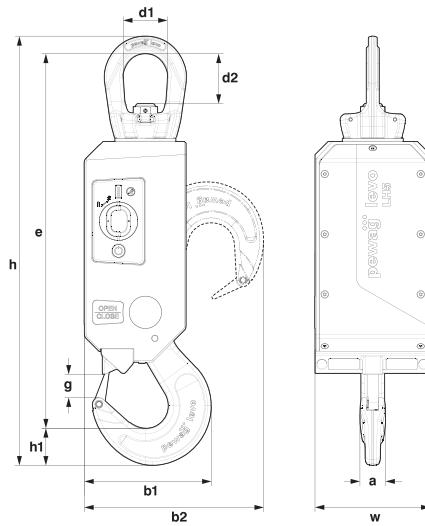

Code	WLL (kg)	e (mm)	a (mm)	b1 (mm)	b2 (mm)	d1 (mm)	d2 (mm)	g (mm)	h (mm)	h1 (mm)	w (mm)	Weight (kg/pc)
LH 5	5,000	460	32	156	220	54	61	29	528	46	142	20
Code	WLL (lbs)	e (inch)	a (inch)	b1 (inch)	b2 (inch)	d1 (inch)	d2 (inch)	g (inch)	h (inch)	h1 (inch)	w (inch)	Weight (lbs/pc)
LH 5	11,000	18.11	1.26	6.14	8.66	2.13	2.40	1.14	20.79	1.81	5.59	44

Distributed by:



Distributed By

WESTECH RIGGING SUPPLY

Visit Us Online at: www.WestechRigging.com

Call Us Toll Free at: 800-442-7475

Call Us or Visit Our Stores: Monday - Friday, 8:00am - 5:30pm Pacific

4140 West 11th Avenue
Eugene, Oregon 97402

2439 McGilchrist St SE
Salem, Oregon 97302



find us on facebook.

facebook.com/pewagUSA



youtube.com/pewagUSA



issuu.pewag.com

