

PLE/N Eta




PLE/N Weld-on Lifting Point


- Grade 80 lifting point approved for both OVERHEAD lifting and lashing
- Can be loaded in any direction
- Patented spring positions load ring at any required angle for one hand rigging
- Unique saddle design insures proper alignment, reduces installation time & labor

Code	* Labeled WLL (kg)	Working Load Limit (lbs)									
		1 Leg 0°	1 Leg 90°	2 Legs 0°	2 Legs 90°	2 Legs 30°-45°	2 Legs 45°-90°	3 & 4 Legs 30°-45°	3 & 4 Legs 45°-90°	2 Legs asymm.	3 & 4 Legs asymm.
PLE/N 6	1,120	2,464	2,464	4,928	4,928	2,464	3,300	3,520	5,060	2,464	2,464
PLE/N 8	2,000	4,400	4,400	8,800	8,800	4,400	6,160	6,600	9,240	4,400	4,400
PLE/N 10	3,150	6,930	6,930	13,860	13,860	6,930	9,680	10,340	14,520	6,930	6,930
PLE/N 13	5,300	11,660	11,660	23,320	23,320	11,660	16,280	17,380	24,640	11,660	11,660
PLE/N 16	8,000	17,600	17,600	35,200	35,200	17,600	24,860	26,400	37,180	17,600	17,600
PLE/N 22	15,000	33,000	33,000	66,000	66,000	33,000	46,200	49,500	69,960	33,000	33,000


* WLL is horizontal in plane
Design factor 4:1 - for reference purposes only / Important: Subject to technical changes!

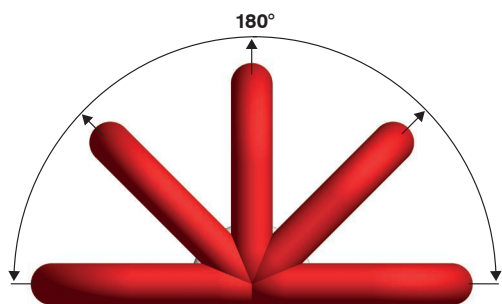

Permitted directions of pull



Permitted directions of pull

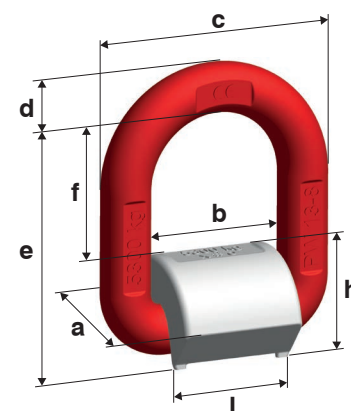

Code	WLL (lbs)	a (inch)	b (inch)	c (inch)	d (inch)	e (inch)	f (inch)	h (inch)	l (inch)	Weight (lbs/pc)
PLE/N 6	2,464	1.42	1.57	2.44	0.43	2.64	1.65	1.02	1.38	0.68
PLE/N 8	4,400	1.46	1.65	2.72	0.51	2.87	1.77	1.10	1.46	0.88
PLE/N 10	6,930	1.61	1.77	3.07	0.65	3.15	1.85	1.34	1.57	1.39
PLE/N 13	11,660	2.40	2.16	3.90	0.86	3.82	2.09	1.73	1.97	3.22
PLE/N 16	17,600	2.48	2.75	4.72	0.98	4.72	2.87	1.89	2.52	5.07
PLE/N 22	33,000	3.50	3.81	6.42	1.30	6.42	3.62	2.75	3.54	11.90

Design factor 4:1 - for reference purposes only
Important: Subject to technical changes!