## **Skookum All Alloy No. 59A Sheet Pile Shackles**




The No. 59A shackles were specifically designed for pulling sheet piling. They are equipped with a easy opening pin which will not detach and become lost. No tools are required.

Max opening with pin in open (unlocked) position.

Design factor is 5 to1.

Replacement pins must replaced or repaired by Skookum in Hubbard, OR.




SIZE	OPENING				_		_				W.L.L
0		Α	В	С	D	E	F	G	Н	WEIGHT	
	2										TONS
1	1.75	4.25	2.25	1.00	1.12	7 ± .25	0.62	2.37	5.00	10	8
1 1/8	1.87	4.50	2.50	1.00	1.25	8 ± .50	0.75	3.00	5.00	13	10
1 1/4	2.00	5.25	2.75	1.25	1.37	9 ± .50	0.87	3.00	5.00	18	12
1 1/2	2.12	6.25	3.00	1.50	1.62	10 ± .50	1.12	3.50	6.00	29	17
1 3/4	2.50	7.00	3.50	1.75	2.00	11 ± .50	1.25	4.00	7.00	45	24
2	3.00	8.00	4.00	2.00	2.25	12 ± .75	1.37	4.50	8.00	63	30

Made in the U.S.A.

## New Skookum No.159A Sheet Pile Shackle Ground release



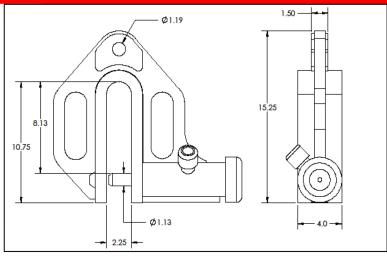

12 ton working load limit @ 4:1 design factor.

Skookum Part Number 615912

Equipped with Skookum 1" #320 bolt type anchor shackle

Built with high strength steel.

12" lg. stainless steel release cable with thimble. (supplied but not shown)

Made in the U.S.A.



**WESTECH RIGGING**