

TJP / TJPU

Designed for (thin) sheet metal lifting without minimum W.L.L.


Application:

- For vertical lifting and transporting of (thin) sheet metal
- Jaw openings available from: 0 to .78 in.
- Working load limit (W.L.L.) 551 - 2,200 lbs
- **No min. W.L.L.**

Note: The plate surface of the material must have a hardness level of max. HRC 37/345 Hb

Features and Benefits:

- Equipped with a special pivot which will adapt itself to the load of the clamp generating extra friction, eliminating the chance of slipping loads
- TJPU features an articulated lifting shackle for universal lifting flexibility at various angles
- TJP features a standard lifting shackle
- Always equipped with a safety mechanism, ensuring the clamp does not slip when lifting force is applied and when load is being lowered
- The clamp is locked in closed as well as in open position
- Lightweight design for easy handling
- Tough quality heavy-duty welded shell body
- Maintenance-friendly. Easy to exchange parts are available upon request

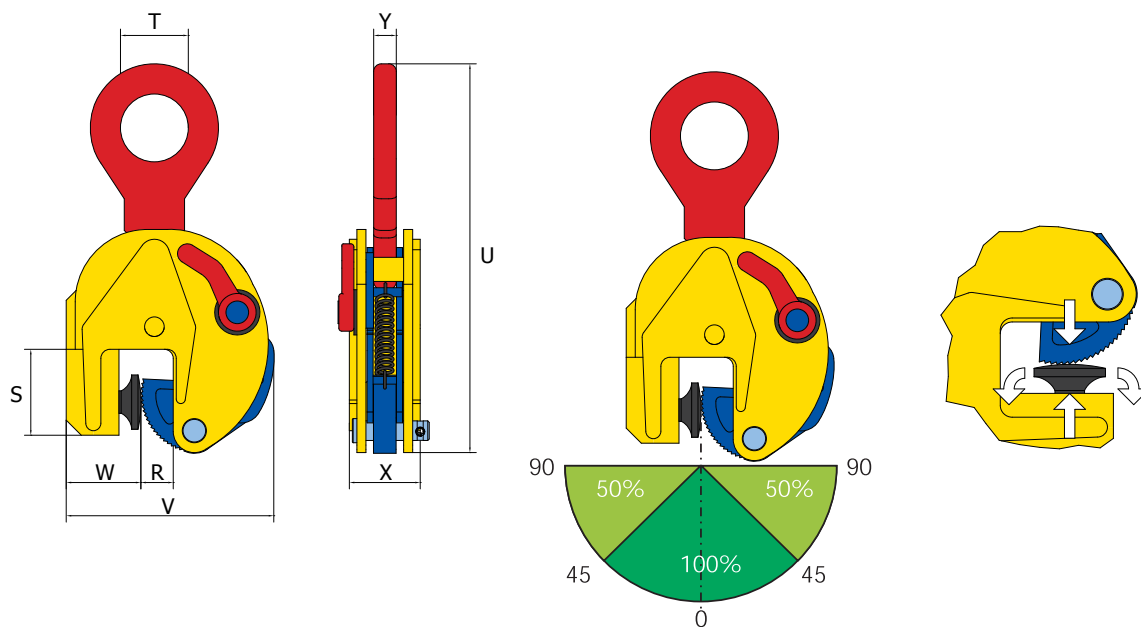

Reference No.	Type	Capacity/W.L.L. (lb/pc)	Jaw opening (R) (inches)	Dimensions in inches							Weight (lb/pc)
				S	T	U	V	W	X	Y	
870700	0.25 TJP	551	0 - .51	2.13	1.18	7.95	4.45	1.97	1.46	.39	5
870710	0.25 TJPU	551	0 - .51	2.13	1.18	7.95	4.45	1.97	1.46	.39	5
870800	1 TJP	2,200	0 - .78	2.20	1.77	10.24	5.39	1.89	1.77	.59	9