




Green Pin® EE Turnbuckle

Turnbuckle with eye-eye end-fitting,
generally to ASTM F1145-92



- **Material:** drop forged high tensile steel SAE 1035 or 1045
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** generally to ASTM F1145-92
formerly U.S. Federal Specification FF-T-791b
- **Finish:** hot dipped galvanized
- **Temperature Range:** -20 °C up to +200 °C
- **Certification:** 2.1 2.2 3.1 MTC³ CE IIA
- **Article code:** scan QR code to see article codes

G-6311

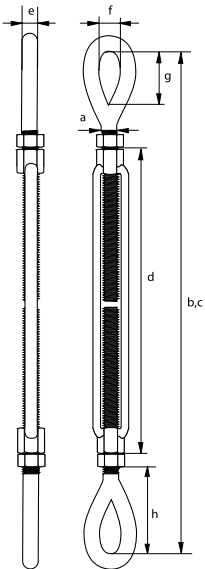

working load limit	diameter thread		take up	length closed position	length open position	length	diameter	width inside	length inside	length closed position	weight each
	a inch	a mm									
0.54	3/8	10	6	292	428	183	10	13	29	49	0.48
1	1/2	12	6	325	455	193	12	18	36	58	0.81
1	1/2	12	9	400	608	270	12	18	36	57	1.07
1	1/2	12	12	476	760	346	12	18	36	57	1.29
1.59	5/8	16	6	380	503	203	14	21	45	79	1.33
1.59	5/8	16	9	455	656	280	14	21	45	78	1.61
1.59	5/8	16	12	531	808	356	14	21	45	78	1.96
2.36	3/4	19	6	413	532	214	17	26	54	89	2.03
2.36	3/4	19	9	490	685	291	17	26	54	89	2.47
2.36	3/4	19	12	564	837	367	17	26	54	88	2.90
2.36	3/4	19	18	718	1143	519	17	26	54	89	3.94
3.27	7/8	22	12	604	870	377	20	32	61	101	4.31
3.27	7/8	22	18	756	1174	529	20	32	61	101	5.51
4.54	1	25	6	498	604	234	24	37	76	118	4.23
4.54	1	25	12	649	909	387	24	37	76	117	5.75
4.54	1	25	18	801	1215	539	24	37	76	117	7.27
4.5	1	25	24	952	1518	692	24	37	76	116	7.80
6.9	1 1/4	32	12	712	985	385	29	47	91	145	9.28
6.9	1 1/4	32	18	862	1287	537	29	47	91	144	11.1
6.9	1 1/4	32	24	1015	1592	690	29	47	91	144	12.1
9.71	1 1/2	38	12	756	1023	401	32	55	106	156	12.6
9.71	1 1/2	38	18	916	1335	553	32	55	106	160	15.8
9.71	1 1/2	38	24	1065	1636	706	32	55	106	158	17.3
12.7	1 3/4	45	18	1020	1396	577	38	61	120	197	23.9
12.7	1 3/4	45	24	1171	1703	730	38	61	120	196	26.7
16.8	2	50	24	1264	1784	748	46	69	147	230	38.3
27.2	2 1/2	64	24	1430	1934	802	51	80	165	274	65
34	2 3/4	69	24	1450	1988	802	57	84	178	284	84

CAD INFO