




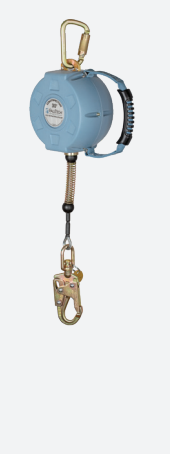

















































































FALLTECH® | Which SRL is Right for You?

| FT-A+ | FT-A | CTR LEADING EDGE | CTR | LEADING EDGE CONTRACTOR | CONTRACTOR |
|---|---|--|--|---|--|
|  |  |  |  |  |  |
| The Ultimate SRL | The No Compromise SRL | Serious Workhorse. Serious Value. | Built to Perform. Priced Right | No-Flrills Compliant | No-Flrills Compliant |
|  AXIS AXIS-Enabled |  AXIS AXIS-Enabled | — | — | — | — |
|  Field-Repairable Field-Repairable Cable Assembly | — | — | — | — | — |
|  Length 30' (20' and 60' to Follow) |  Length 20' / 30' / 60' |  Length 20' / 30' / 60' |  Length 20' / 30' / 60' / 80' |  Length 20' / 30' / 50' |  Length 20' / 30' / 50' |
|  ANSI Class 2 |  ANSI Class 2 |  ANSI Class 2 |  ANSI Class 1 |  ANSI Class 2 |  ANSI Class 1 |
|  User Capacity 420 lb. User Capacity |  User Capacity 420 lb. User Capacity |  User Capacity 310 lb. User Capacity |  User Capacity 310 lb. User Capacity |  User Capacity 310 lb. User Capacity |  User Capacity 310 lb. User Capacity |
|  Housing Material Composite |  Housing Material Composite |  Housing Material Composite |  Housing Material Composite |  Housing Material Glass-Filled Nylon |  Housing Material Glass-Filled Nylon |
|  Lifeline 7/32" Galvanized Wire Rope |  Lifeline 7/32" Galvanized Wire Rope |  Lifeline 7/32" Galvanized Wire Rope |  Lifeline 7/32" Galvanized Wire Rope |  Lifeline 3/16" Galvanized Wire Rope |  Lifeline 7/32" Galvanized Wire Rope |
|  Energy Absorber Armored or Textile External and UV and Water-Resistant |  Energy Absorber Armored or Textile External and UV and Water-Resistant |  Energy Absorber External EA with WrapPack Cover |  Energy Absorber Armored External and UV & Water-Resistant |  Energy Absorber Internal brake |  Energy Absorber External EA with WrapPack Cover |
|  Label UV, Scratch-Resistant |  Label UV, Scratch-Resistant |  Label Scratch-Resistant |  Label Scratch-Resistant |  Label Scratch-Resistant |  Label Scratch-Resistant |
|  Handle Integrated |  Handle Integrated |  Handle Composite Textile with Integrated Wire Rope |  Handle Composite Textile with Integrated Wire Rope |  Handle Textile |  Handle Textile |
|  Anchorage Aluminum Swivel |  Anchorage Aluminum Swivel |  Anchorage Steel Swivel |  Anchorage Steel Swivel |  Anchorage Fixed |  Anchorage Fixed |
|  Worker UX Optimized Working/Walking Speed. No Nuisance Lock-Up. |  Worker UX Optimized Working/Walking Speed. No Nuisance Lock-Up. |  Worker UX Optimized Working/Walking Speed. No Nuisance Lock-Up. |  Worker UX Optimized Working/Walking Speed. No Nuisance Lock-Up. |  Worker UX Consistent and Reliable Payout |  Worker UX Consistent and Reliable Payout |
|  Lifeline Orifice Wear-Resistant Composite |  Lifeline Orifice Wear-Resistant Composite |  Lifeline Orifice Wear-Resistant Composite |  Lifeline Orifice Wear-Resistant Composite |  Lifeline Orifice Metal |  Lifeline Orifice Metal |
|  Lifeline handle Shock-Resistant Grab Handle |  Lifeline handle Shock-Resistant Grab Handle |  Lifeline handle Shock-Resistant Grab Handle |  Lifeline handle Shock-Resistant Grab Handle |  Lifeline handle Spring / Shock Grab Handle |  Lifeline handle Spring / Shock Grab Handle |
|  Weight Industry Leading Light Weight |  Weight Industry Leading Light Weight |  Weight Industry Leading Light Weight |  Weight Industry Leading Light Weight | — | — |

Visit [FallTech.com](https://www.falltech.com) and Learn More!