FALLTECH®

Anti-panic Fall Arrester

Anti-panic Fall Arrester

• Meets ANSI Z359.15-2014.

For fall arrest or restraint applications.

• **Continuous fall protection.** Cam-action braking design quickly locks on the lifeline to arrest a fall. Anti-panic feature places pressure on the lifeline should the user grip the lever in the open position while experiencing a fall.

• **Easy to use.** Hinged design allows installation at any point on the lifeline. Anti-inversion hinge cam prevents upside-down installation.

• **Improved productivity.** Hands-free operation with tension roller and internal spring keep the device in position and provide smooth operation up and down the lifeline.



8388 | Anti-panic Fall Arrester with 3' Energy Absorbing Lanyard




FALL ARRESTER FEATURES






Tension roller



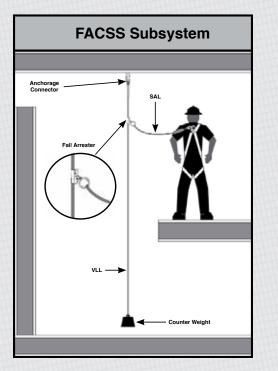

Personal Fall Arrest System (PFAS)

A personal fall arrest system is made up of a combination of fall protection components. The first component is the vertical lifeline (VLL), which is typically composed of a rope of various materials, lengths and end terminations. When a VLL is combined with connectors, a shock absorbing lanyard (SAL), a fall arrestor (rope grab), and a counter weight, it becomes a Fall Arrester Connector Subsystem (FACSS). A FACSS, combined with an anchorage and full body harness, form a Personal Fall Arrest System (PFAS). This assembly of components and subsystems is what is used to arrest a person during a fall event.

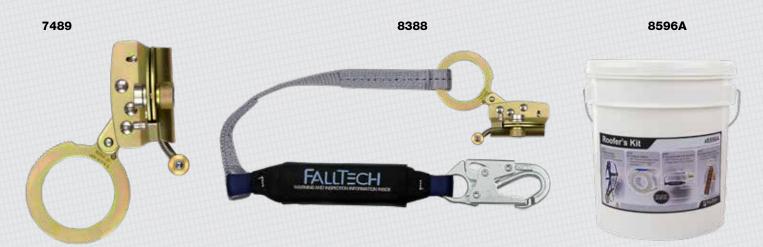

Part#	Description	8596A Roofer's Kit Includes:	
7489	Anti-panic Fall Arrester	8388	Anti-panic Fall Arrester with 3' ViewPack® Lanyard
8388	Anti-panic Fall Arrester with 3' Energy Absorbing Lanyard	7016	Contractor Full Body Harness
8596A	Premium Roofer's Kit with Anti-panic Fall Arrester	8150	50' Vertical Lifeline
		7410	Reusable Roof Anchor

Product descriptions and specifications herein may change without notice.

