

 FALLTECH®



ARC-FLASH ⚠️

MINI
PRO™

The FallTech® Arc Flash Mini Pro™ is a new high-performance self-retracting lifeline (SRL) designed to meet every need for utility crews working at height. Designed for utility workers facing arc flash hazards, this compact and efficient SRL combines rugged construction and innovative technology built to withstand extreme temperatures.

7' Class 1 SRL-P

Arc Flash Mini Pro™



Compact Ergonomic Design

Small and efficient design keeps retractable unit close to—and high up—the user's back to reduce premature fatigue.



Triple Action Connector

Unique connector design makes dorsal attachment as simple as a button push to engage and disengage with your device.



Low Profile Energy Absorber

420lb-rated, Nomex®-protected energy absorber uses a low-profile shape to limit heat and sweat buildup.




Fall Clearance Indicator

Detailed fall clearance chart and table included within energy absorber's Nomex® cover.




Arc Flash Rated

ASTM F887-rated to withstand the extreme temperatures from arc flash hazards.



Class 1 Compliant

ANSI Class 1-compliant for anchorage at, above, or up to 5 feet below user D-ring in non-leading edge applications.

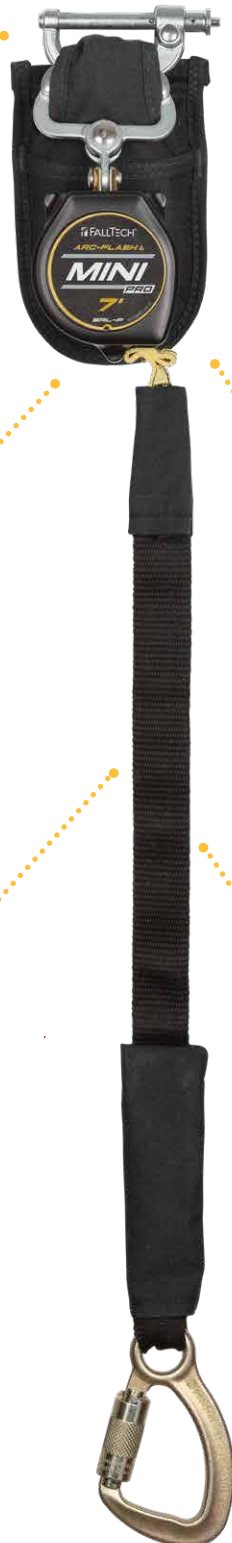


72907SP8

The FallTech Arc Flash Mini Pro™ comes in multiple hook options to meet the varied preferences of utility workers. Whichever option you choose, trust that it has been engineered and tested to the highest standard. Expect nothing less from the innovators at FallTech.

7' Class 1 SRL-P

Arc Flash Mini Pro™



Steel 5k Carabiner



Steel 5k Snap Hook



Dielectric Snap Hook



72907SP8

SPECS



Part #	Single/ Twin	Leg-end Connector
72907SP8	Single	Steel 5k Carabiner
72907SP8S	Single	Steel 5k Snap Hook
72907SPD1	Single	9kV Dielectric Snap Hook

Performance Specifications	
ANSI SRL Class/Type	Class 1 SRL-P
Maximum Arrest Force	1,800 lb
Average Arrest Force	1,575 lb or less
Maximum Arrest Distance	42 in or less
Static Strength	3,600 lbs minimum
ANSI User Capacity	One User up to 310 lbs. max
OSHA User Capacity	One User up to 420 lbs. max

Material Specifications	
Housing	Nylon
Lifeline	Kevlar® (Min. 3,600 lbs)
Leg-end Connector	Variable (5,000 lb min. strength with 3,600 lb min. gate strength)
Dorsal Connector	Aluminum Alloy (5,000 lb min. strength)

Relevant Standards	
ANSI	Z359.14-2021
OSHA	1926.502, 1910.140

Discover the full selection of all
our fall protection products at
www.FallTech.com



Tel / 323.752.0066

Fax / 323.752.5613

©2024 Alexander Andrew, Inc
1306 S. Alameda St. Compton,
CA. 90221-4803

Tools shown not included.

Product description and specifications
herein may change without notice.

U.S. and International Patents Pending.

