


 FALLTECH®

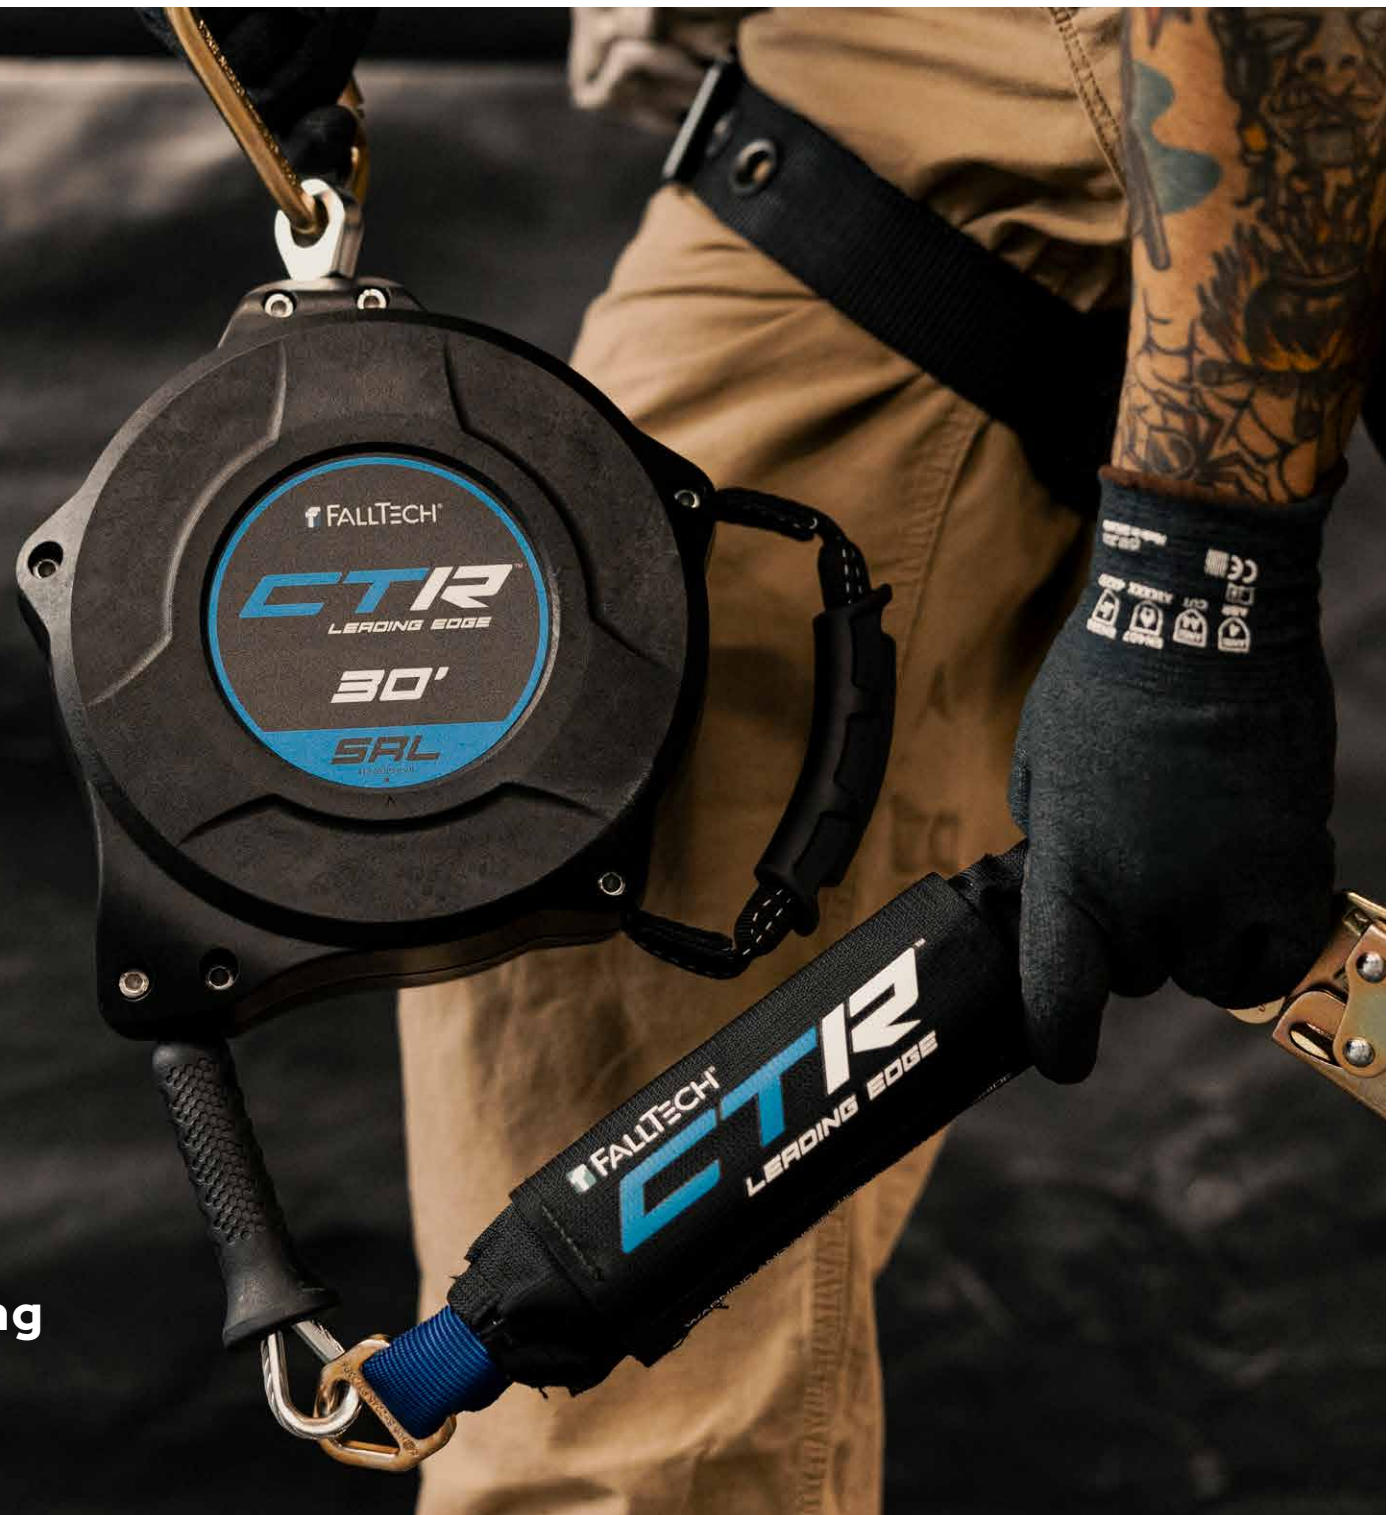

CTR™
LEADING EDGE

**Class 2 Self-Retracting
Lifeline**

Patent Pending

The CTR™ is engineered for those who prioritize safety and performance. Supporting workers up to 310 pounds, safety professionals have an SRL that they can trust on the most demanding job sites.



01 HEAVY-DUTY CARRY HANDLE

The CTR boasts a steel-reinforced composite fabric handle for easy and dependable transport in the field.



02 HIGH STRENGTH LIFELINE

The CTR features a 7/32-inch galvanized steel cable ANSI-rated to support workers up to 310 pounds.



03 OPTIMIZED LOCK-UP

An enhanced internal mechanism minimizes unintentional lockups, keeping you moving smoothly and boosting your productivity.




04 EXTERNAL SHOCK ABSORBER

A sleek, unintrusive shock pack absorbs the impact of free falls with precision and consistency so you stay protected at every step.



05 DURABLE HOUSING

A glass-reinforced nylon housing is both strong and lightweight, reducing strain and fatigue while ensuring durable, easy handling for all-day comfort.

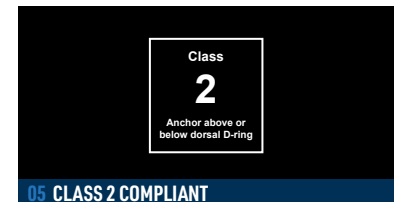

05 CLASS 2 COMPLIANT

You can anchor the CTR at, above, or up to 5 feet below your D-ring and in leading-edge environments. Enjoy the freedom to work confidently in any orientation or location.



The CTR features a galvanized steel cable tested to survive leading-edge exposure. As an ANSI Class 2 SRL, the CTR gives users the choice of anchoring at, above, or up to 5 feet below their D-ring.



MATERIAL SPECIFICATIONS

Housing	Glass Reinforced Nylon
Cable	7/32" Galvanized Steel Wire Rope (3,600 lb min. strength)
Lifeline Connector	Plated Alloy Steel (5,000 lb min. strength with 3,600 lb min. gate strength)
Anchorage Connector	Plated Alloy Steel (5,000 lb min. strength with 3,600 lb min. gate strength)

PART #	FT-R SRL LENGTH
723730LE	30'

RELEVANT STANDARDS

ANSI	Z359.14-2021
OSHA	1926.502, 1910.140

PERFORMANCE SPECIFICATIONS

ANSI SRL Class/Type	Class 2 SRL
Maximum Arrest Force	1,800 lb
Average Arrest Force	1,575 lb or less
Maximum Arrest Distance	42 in. or less
Static Strength	3,600 lb min.
ANSI User Capacity	1 User Up to 310 lb max
OSHA User Capacity	1 User Up to 310 lb max

Find the Full Selection of Our Fall Protection Products at FallTech.com



©2025 Alexander Andrew, Inc
1306 S. Alameda St.
Compton, CA. 90221-4803

Tel / 323.752.0066

Fax / 323.752.5613

Tools shown not included.

Product description and specifications
herein may change without notice.

U.S. and International Patents Pending.

