

## MANY EDGES, ONE BLOCK.

Leading edges, sharp edges, soft edges, round edges — DuraTech® Leading Edge SRL from FallTech® has got you covered.

- **Meets ANSI Z359.14-2014.** For leading edge applications.
- **Anchoring flexibility.** Anchor overhead or at foot level. The choice is yours.
- **Reduced nuisance lockups.** Improved internal design minimizes unintentional lockups so you can move at normal walking speed.
- **Low cost of ownership.** We know you're hard on your gear so we designed the cast aluminum housing to last.

### FEATURES


 <p>1 Extra large, double locking anchorage carabiner included</p>	 <p>2 Rugged lightweight aluminum housing</p>	 <p>3 7/32" galvanized steel cable</p>
 <p>4 External energy absorber with patented ViewPack® cover</p>	 <p>5 Load-indicating swivel snap hook</p>	 <p>6 Stackable housing</p>



7232CLE | 30' DuraTech®  
Leading Edge SRL




No matter what edge you're facing, the FallTech® DuraTech® Leading Edge SRL (self-retracting lifeline) delivers the highest level of fall protection. It's tough enough for daily jobsite abuse, while being light enough to carry and stack. It's been fine-tuned for an exceptionally smooth payout so you can work without worrying about nuisance lockup.

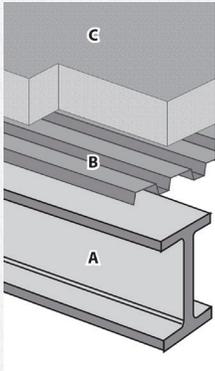

### LEADING EDGE 101

A leading edge is the unprotected side and edge of a floor, roof, or formwork for a floor or other walking/working surface which changes locations as additional levels are constructed. ANSI's standard is any edge with a radius of 0.005". Because the edges are more hazardous, you'll need an SR that has a stronger cable as well as an external energy absorber to handle the forces of a fall. The DuraTech® LE meets ANSI and OSHA requirements.

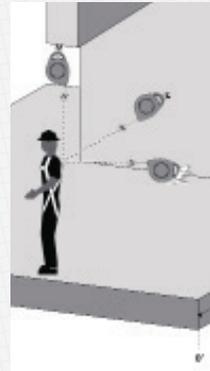

### YOU DECIDE WHERE TO ANCHOR.

Go ahead and tie off at foot level, up to 5' below your dorsal D-ring. Just be sure you always refer to the instruction manual for calculating minimum required fall clearance. Traditional overhead tie off is always an option too.

Part #	Description	Length	Weight	ANSI SRL Class
7226CLE	15' DuraTech® Leading Edge SRL	15'	14 lbs.	A
7227CLE	20' DuraTech® Leading Edge SRL	20'	16.4 lbs.	B
7232CLE	30' DuraTech® Leading Edge SRL	30'	17.5 lbs.	B
7268CLE	50' DuraTech® Leading Edge SRL	50'	25 lbs.	B
7265CLE	60' DuraTech® Leading Edge SRL	60'	26 lbs.	B



Product descriptions and specifications herein may change without notice.