

DURATECH[®]

SELF-RETRACTING DEVICES

Rugged. Tough. Dependable.

The DuraTech Self-Retracting Device offers a side cable payout that provides a smoother payout and retraction of the cable minimizing wear on the internal components extending the life of the SRD. This smoother cable payout reduces unintentional lock-up and allows workers to move effortlessly maximizing worker efficiencies and reducing worker fatigue.

The precision machined aluminum housing allows the SRDs to be stacked on top of one another to maximize transport and minimize storage space requirements. An ergonomic carrying handle is molded into the lightweight aluminum housing allowing easy transport around the job site.

- **Corrosion Resistant** – Aluminum housing and internal drum reduces weight and resists corrosion.
- **Side Cable Payout** – Provides incredibly smooth cable extension and retraction while reducing wear and tear of internal components extending the life of the SRD.
- **Stackable Design** – Allows the SRD to be stacked on one another maximizing transport and minimizing space required for storage.
- **Fast Acting Braking** – Provides maximum stopping power in the event of a fall.
- **The Right Length for the Job** – Offered in lengths of 15', 20', 25', 30', 40', 50' 60'.
- **Swiveling, Self-locking Carabiner** – Eliminates frustrating cable twisting and provides a visual indicator in case of a fall arrest.
- **Complies** with the following ANSI and OSHA requirements:
 - ANSI: Z359.14-2014
 - OSHA: 1926.502, 1910.66.




To learn more visit us at:

www.falltech.com



FALLTECH[®]
Fall Protection. Precision Engineered.

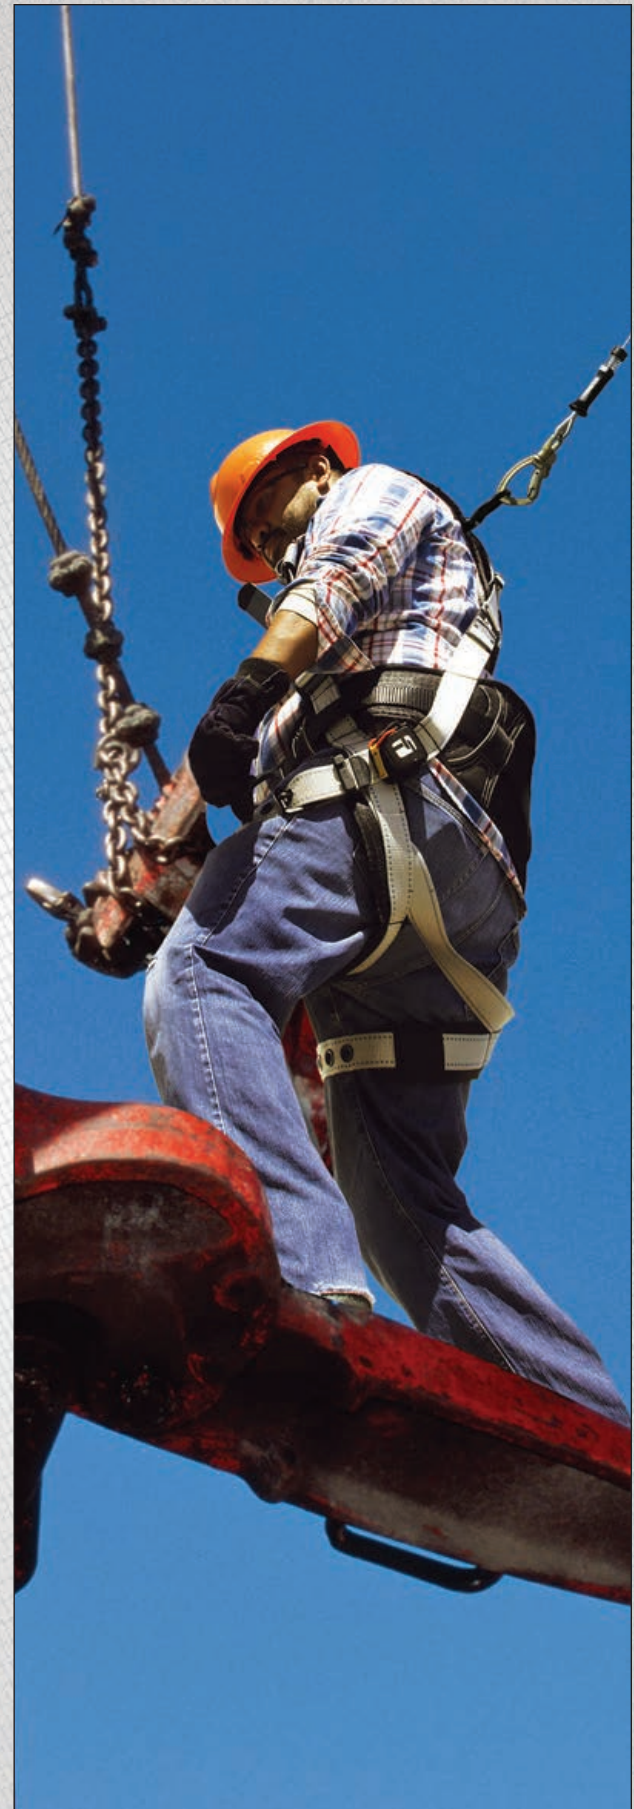

| MATERIALS SPECIFICATIONS | |
|--|--|
| Housing: | Machined Aluminum |
| Cable: | 3/16" galvanized steel, Min. 3,400 lbs. tensile strength |
| Load Indicating Swivel Carabiner: | Min. 5,000 lbs. tensile strength and 3600 lbs. gate strength |

| PERFORMANCE SPECIFICATIONS | | |
|---------------------------------|-----------------|----------------|
| ANSI | CLASS A | CLASS B |
| Maximum Arrest Force: | 1,800 lbs. | 1,800 lbs. |
| Maximum Arrest Distance: | 24" or less | 54" or less |
| Average Arrest Force: | 1,575 lbs. Max. | 1,125 lbs. Max |
| SRD Static Strength | 3,000 lbs. Min. | |
| User Capacity | 130 to 310 lbs. | |

| TYPICAL FALLTECH® SRD PERFORMANCE | | | | | |
|--|-------------------|-----------|-----------------|----------------------|----------------------|
| Style # | Length | SRD Class | Arrest Distance | Average Arrest Force | Maximum Arrest Force |
| 7226C 7227C | 15' 20' | Class A | 17" | 1,007 lbs. | 1,800 lbs. |
| 7229C 7232C | 25' 30' | Class A | 22" | 1,105 lbs. | 1,800 lbs. |
| 7267C 7268C 7265C | 40' 50' 60' | Class B | 34" | 1,021 lbs. | 1,800 lbs. |

Warning: All Fall Protection equipment should only be used after reading and understanding the manufacturer's instructions and proper training on the product. Failure to receive proper training and follow the manufacturer's instructions could result in serious injury or death.