

FALLTECH®

FT-1910
FIT

Women's
Full-Body Harness





The **FT-1910 Fit** is the first premium general industry safety harness designed specifically for women. With patent-pending hip adjustability, anti-bacterial webbing, and stainless-steel hardware, it's built for durability and made to fit women in the field.



01 COMFORT GEL PADDING

Gel padding cushions your body while maintaining air flow and dispersing pressure, thus neutralizing fatigue and preserving your performance.



02 COMFORT LEGS™

The FT-1910 Fit features lateral leg straps that give workers maximum mobility and pinch-free movement.




03 SUSPENSION TRAUMA STRAPS

Each harness comes with suspension trauma relief packs that can help prevent life-threatening secondary injuries while awaiting rescue.



04 ULTRATECH™ WEBBING

The FT-1910 Fit features webbing enhanced with a moisture-resistant and anti-microbial treatment that protects against moisture, bacteria, and grime, ensuring long-lasting protection against wear and tear.

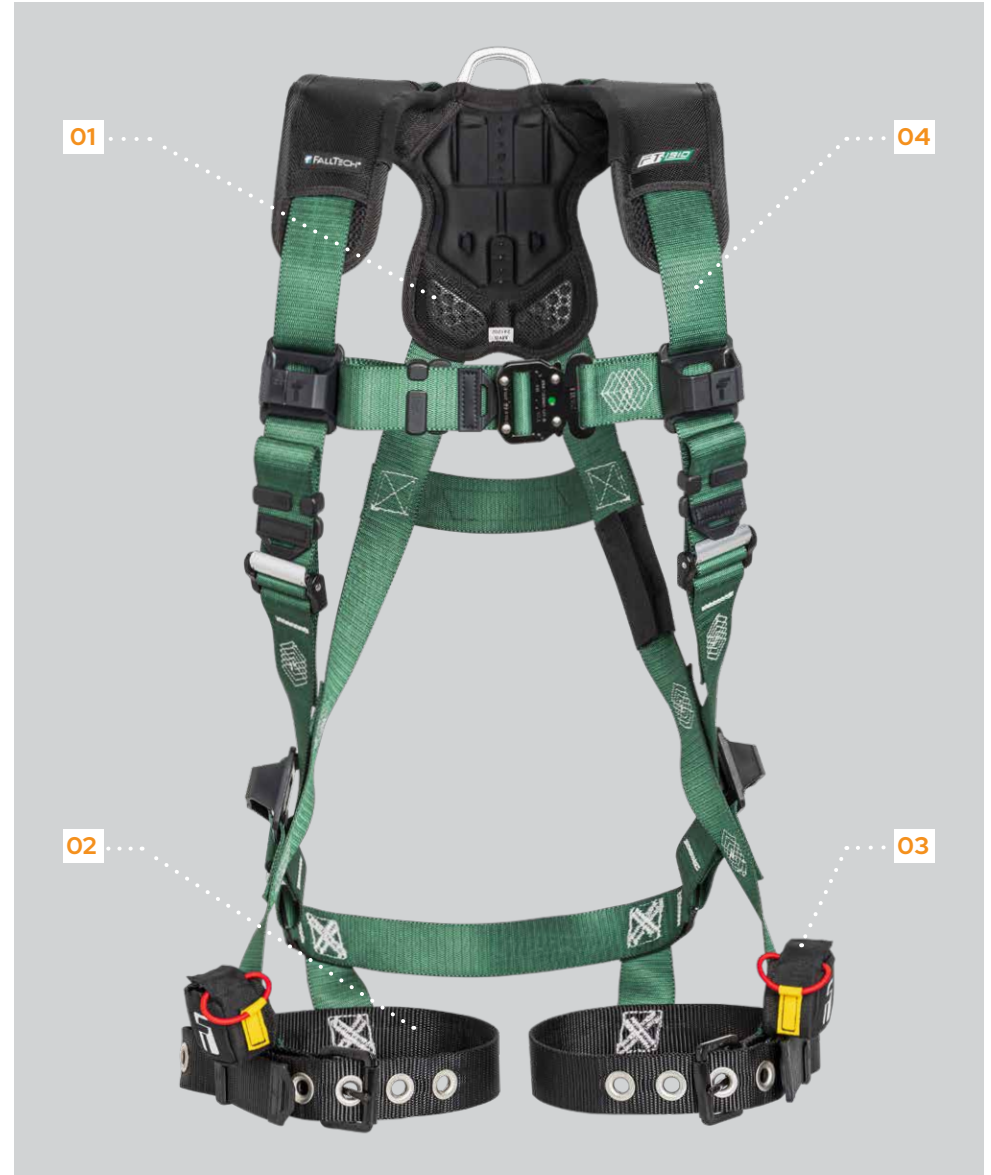



The **FT-1910 Fit** is the first premium general industry safety harness designed specifically for women. With patent-pending hip adjustability, anti-bacterial webbing, and stainless-steel hardware, it's built for durability and made to fit women in the field.



05 ARROWGRIP® D-RING PLATE

An angular dorsal plate is carefully designed to keep your harness's D-ring secure in its proper position even under the weight of Class 2 SRL-Ps.



06 EXTRA LANYARD KEEPERS

The FT-1910 Fit comes with four lanyard keepers: One pair along your chest, and another on each side of your torso to keep lanyards secured and out of the way.




07 HIP ADJUSTABILITY

Exclusive, patent-pending adjustable sub pelvic strap ensures a precise, comfortable fit for all female body types—eliminating the need to size up or manage excess torso webbing.



08 STAINLESS STEEL GROMMETS

Tongue-buckle versions have stainless steel grommets for superior corrosion resistance in moist environments.

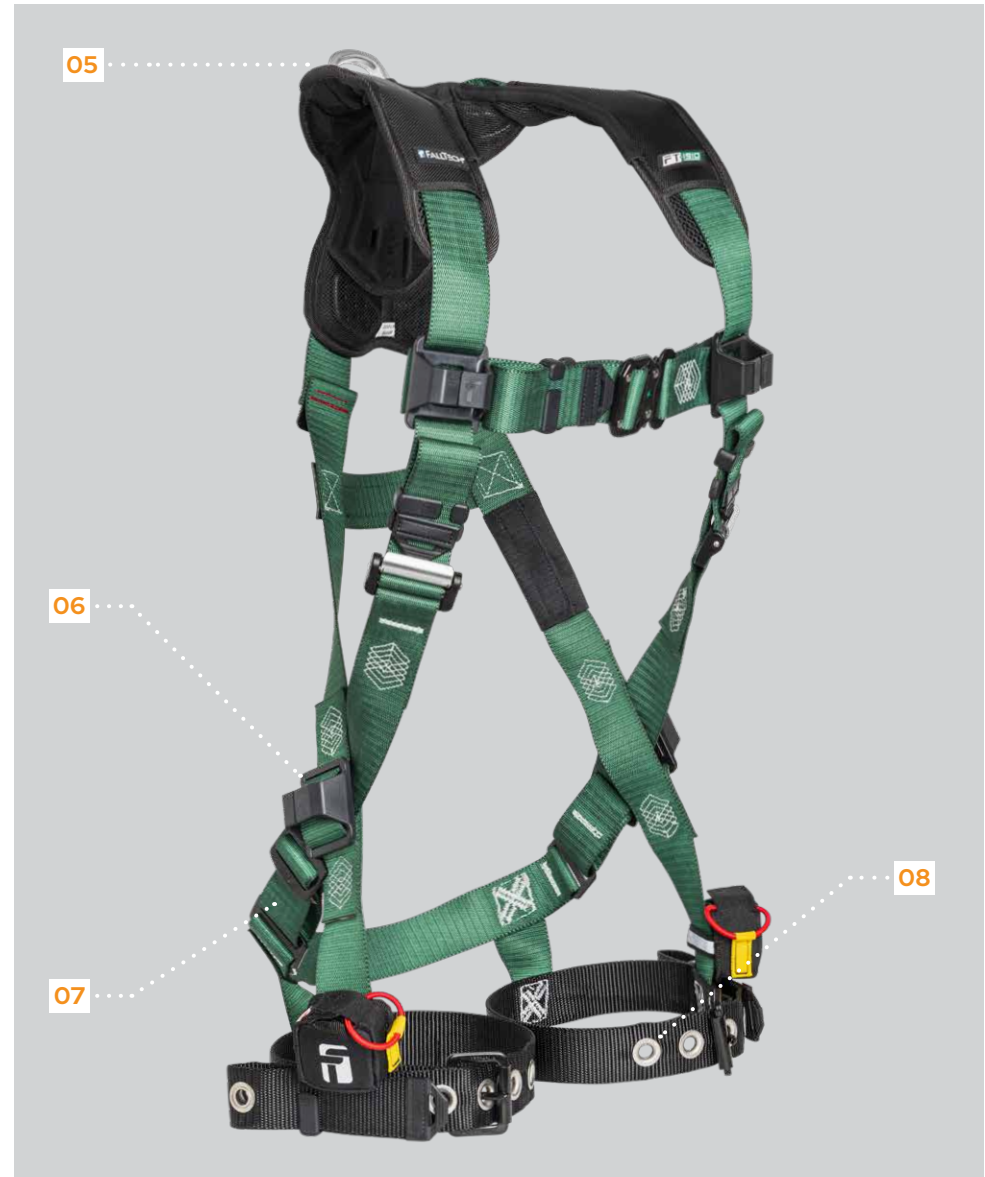



1910F
1D Standard Non-Belted



Material Specifications	
Webbing	Polyester (5,000 lbs. min. strength)
D-Rings	Aluminum Alloy (5,000 lbs. min. strength)
Adjusters	Aluminum Alloy (3,372 lbs. min. strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lbs. min. strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lbs. min. strength)

Relevant Standards	
ANSI	Z359.11-2021
OSHA	1926.502, 1910.140

Performance Specifications	
Static Strength	3,600 lb min.
ANSI User Capacity	One user up to 310 lb max
OSHA User Capacity	Allowable up to 425 lb max

1D Standard Non-Belted		
Part #	Size	Leg Closure
1910FXS	Extra Small	Tongue Buckle
1910FSM	Small / Medium	
1910FLXL	Large / Extra Large	
1910F2X3X	2X / 3X	



1910F3D
3D Standard Non-Belted



Material Specifications	
Webbing	Polyester (5,000 lbs. min. strength)
D-Rings	Aluminum Alloy (5,000 lbs. min. strength)
Adjusters	Aluminum Alloy (3,372 lbs. min. strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lbs. min. strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lbs. min. strength)

Relevant Standards	
ANSI	Z359.11-2021
OSHA	1926.502, 1910.140

Performance Specifications	
Static Strength	3,600 lb min.
ANSI User Capacity	One user up to 310 lb max
OSHA User Capacity	Allowable up to 425 lb max

3D Standard Non-Belted		
Part #	Size	Leg Closure
1910F3DXS	Extra Small	Tongue Buckle
1910F3DSM	Small / Medium	
1910F3DLXL	Large / Extra Large	
1910F3D2X3X	2XL / 3XL	



1910FQC
1D Standard Non-Belted



Material Specifications	
Webbing	Polyester (5,000 lbs. min. strength)
D-Rings	Aluminum Alloy (5,000 lbs. min. strength)
Adjusters	Aluminum Alloy (3,372 lbs. min. strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lbs. min. strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lbs. min. strength)

Relevant Standards	
ANSI	Z359.11-2021
OSHA	1926.502, 1910.140

Performance Specifications	
Static Strength	3,600 lb min.
ANSI User Capacity	One user up to 310 lb max
OSHA User Capacity	Allowable up to 425 lb max

1D Standard Non-Belted		
Part #	Size	Leg Closure
1910FQCXS	Extra Small	Quick-Connect
1910FQCXM	Small / Medium	
1910FQCXL	Large / Extra Large	
1910FQC2X3X	2XL / 3XL	



1910F3DQC
3D Standard Non-Belted



Material Specifications	
Webbing	Polyester (5,000 lbs. min. strength)
D-Rings	Aluminum Alloy (5,000 lbs. min. strength)
Adjusters	Aluminum Alloy (3,372 lbs. min. strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lbs. min. strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lbs. min. strength)

Relevant Standards	
ANSI	Z359.11-2021
OSHA	1926.502, 1910.140

Performance Specifications	
Static Strength	3,600 lb min.
ANSI User Capacity	One user up to 310 lb max
OSHA User Capacity	Allowable up to 425 lb max

3D Standard Non-Belted		
Part #	Size	Leg Closure
1910F3DQCXS	Extra Small	Quick-Connect
1910F3DQCXM	Small / Medium	
1910F3DQCXL	Large / Extra Large	
1910F3DQC2X3X	2XL / 3XL	

Find Our Full Selection of Fall Protection Products at FallTech.com



©2025 Alexander Andrew, Inc
1306 S. Alameda St.
Compton, CA. 90221-4803

Tel / 323.752.0066

Fax / 323.752.5613

Tools shown not included.

Product description and specifications
herein may change without notice.

U.S. and International Patents Pending.

