

 FALLTECH®



FT-ARC
FLASH

**Premium
Full-Body Harness**



The **FT-Arc** is the premium arc flash rated full body harness that delivers the ultimate in performance and protection without restricting the way you work. Ergonomic comfort, light weight, and infinite adjustability, all in one premium harness.



01 KEVLAR®/NOMEX® CONSTRUCTION

Built with Kevlar and Nomex materials, the arc flash gold standard, throughout to protect against the most severe arc flash and electrocution hazards.




02 UPGRADED LANYARD KEEPERS

We installed durable lanyard keepers that provide robust functionality for single and double-leg lanyards. They add versatility and reusability while maintaining ANSI compliance.




03 SUSPENSION TRAUMA RELIEF PACKS

Our suspension trauma relief system helps minimize the effect of being suspended while awaiting rescue. The adjustable length step-in loop design accommodates both of the user's feet to relieve pressure and improve balance.

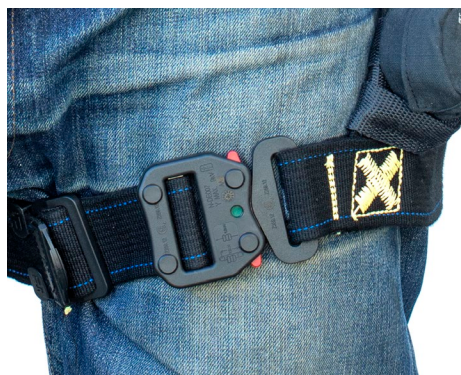

04 EXCLUSIVE COMFORT LEGS®

These game-changing lateral leg straps greatly improve both mobility and comfort. Our revolutionary form-fitting straps wrap easily around your thighs – away from sensitive pinch points.

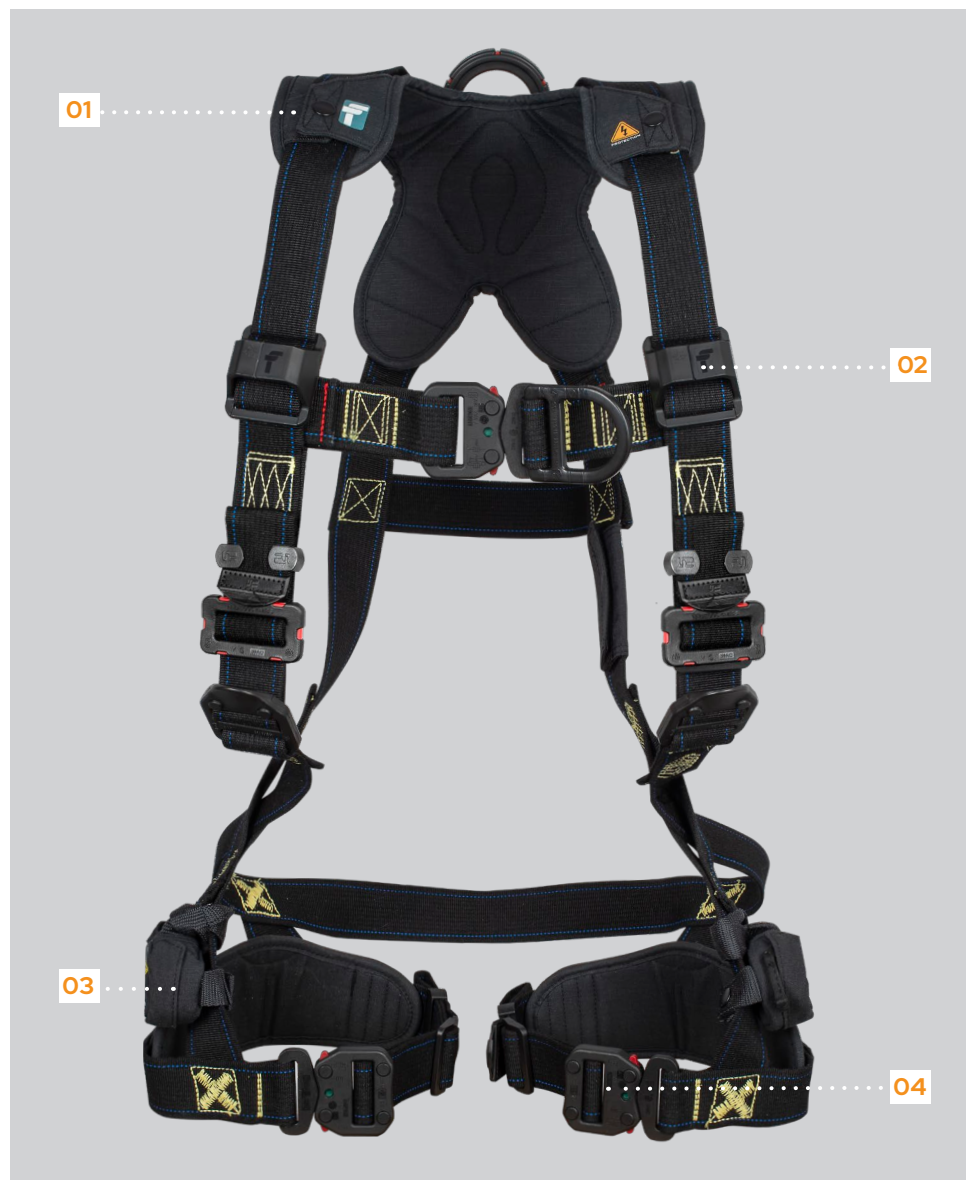



**05 SLIP-RESISTANT ARROWGRIP®
D-RING PLATE**

Keeps your dorsal D-ring positioned correctly and keeps harness adjustments to a minimum throughout the day. Don't let D-ring slippage compromise your safety or comfort.



06 UPDATED SRL ATTACHMENT POINT

Our convenient SRL attachment design lets you connect all types of single and twin SRLs – faster and easier than ever. No more fumbling with the harness webbing every time you connect.



07 9KV RATED HARDWARE

Features 9KV rated dielectric overmolded hardware to protect against the most severe arc flash and electrocution hazards.





8078FDQC

2D Climbing Non-Belted Arc Flash Premium Full Body Harness with 9kV rated overmolded quick connect chest and leg closures is durable and provides you the protection from arc flash hazards to get your job done right with features for maximum comfort and productivity.



Material Specifications	
Webbing	Nomex®/Kevlar® (5,000 lbs. min. strength)
D-Rings	Overmolded Alloy Steel (5,000 lbs. min. strength)
Adjusters	Overmolded Alloy Steel (5,000 lbs. min. strength)
Quick Connect Buckles	Overmolded Alloy Steel (5,000 lbs. min. strength)

Relevant Standards	
ANSI	Z359.11-2021
OSHA	1926.502, 1910.140
ASTM	ASTM F887-20

Performance Specifications	
Static Strength	3,600 lb min.
ANSI User Capacity	One user up to 310 lb max
OSHA User Capacity	Allowable up to 425 lb max

2D Climbing Non-Belted		
Part #	Size	Leg Closure
8078FDQCXS	Extra Small	Overmolded Quick Connect Buckles
8078FDQCS	Small	
8078FDQCM	Medium	
8078FDQCL	Large	
8078FDQCXL	Extra Large	
8078FDQC2X	2X Large	
8078FDQC2X	3X Large	



8074FDQC

4D Construction Climbing Arc Flash Premium Full Body Harness with 9kV rated overmolded quick connect chest and leg closures is durable and provides you the protection from arc flash hazards to get your job done right with features for maximum comfort and productivity.



Material Specifications	
Webbing	Nomex®/Kevlar® (5,000 lbs. min. strength)
D-Rings	Overmolded Alloy Steel (5,000 lbs. min. strength)
Adjusters	Overmolded Alloy Steel (5,000 lbs. min. strength)
Quick Connect Buckles	Overmolded Alloy Steel (5,000 lbs. min. strength)

Relevant Standards	
ANSI	Z359.11-2021
OSHA	1926.502, 1910.140
ASTM	ASTM F887-20

Performance Specifications	
Static Strength	3,600 lb min.
ANSI User Capacity	One user up to 310 lb max
OSHA User Capacity	Allowable up to 425 lb max

4D Construction Climbing		
Part #	Size	Leg Closure
8074FDQCXS	Extra Small	Overmolded Quick Connect Buckles
8074FDQCS	Small	
8074FDQCM	Medium	
8074FDQCL	Large	
8074FDQCXL	Extra Large	
8074FDQC2X	2X Large	
8074FDQC3X	3X Large	

Find Our Full Selection of Fall Protection Products at FallTech.com



©2025 Alexander Andrew, Inc
1306 S. Alameda St.
Compton, CA. 90221-4803

Tel / 323.752.0066

Fax / 323.752.5613

Tools shown not included.

Product description and specifications
herein may change without notice.

U.S. and International Patents Pending.



@falltechsafety



@falltech



@falltechsafety



@falltech