



FALLTECH®

FT ONE
FIT

**Women's
Full Body Harness**



The **FT-OneFit™** Premium Full-Body Harness is designed for professional women working at height. No more compromises: This harness gives users a personalized fit with unique hip adjustability and unmatched comfort.



01 ABRASION RESISTANT SHOULDER PADS

Don't let your shoulder pads wear out prematurely from constant use and carrying heavy loads. Our industry-exclusive shoulder material helps alleviate excess wear, keeping your harness in service longer.



02 HIP ADJUSTABILITY

Exclusive to the FT-One Fit, the patented adjustable sub-pelvic strap ensures a proper fit, allowing maximum comfort for all body types.




03 SUSPENSION TRAUMA RELIEF PACKS

Our suspension trauma relief system helps minimize the effect of being suspended while awaiting rescue. The adjustable length step-in loop design accommodates both of the user's feet to relieve pressure and improve balance.



04 EXCLUSIVE COMFORT LEGS®

These game-changing lateral leg straps greatly improve both mobility and comfort. Our revolutionary form-fitting straps wrap easily around your thighs – away from sensitive pinch points.

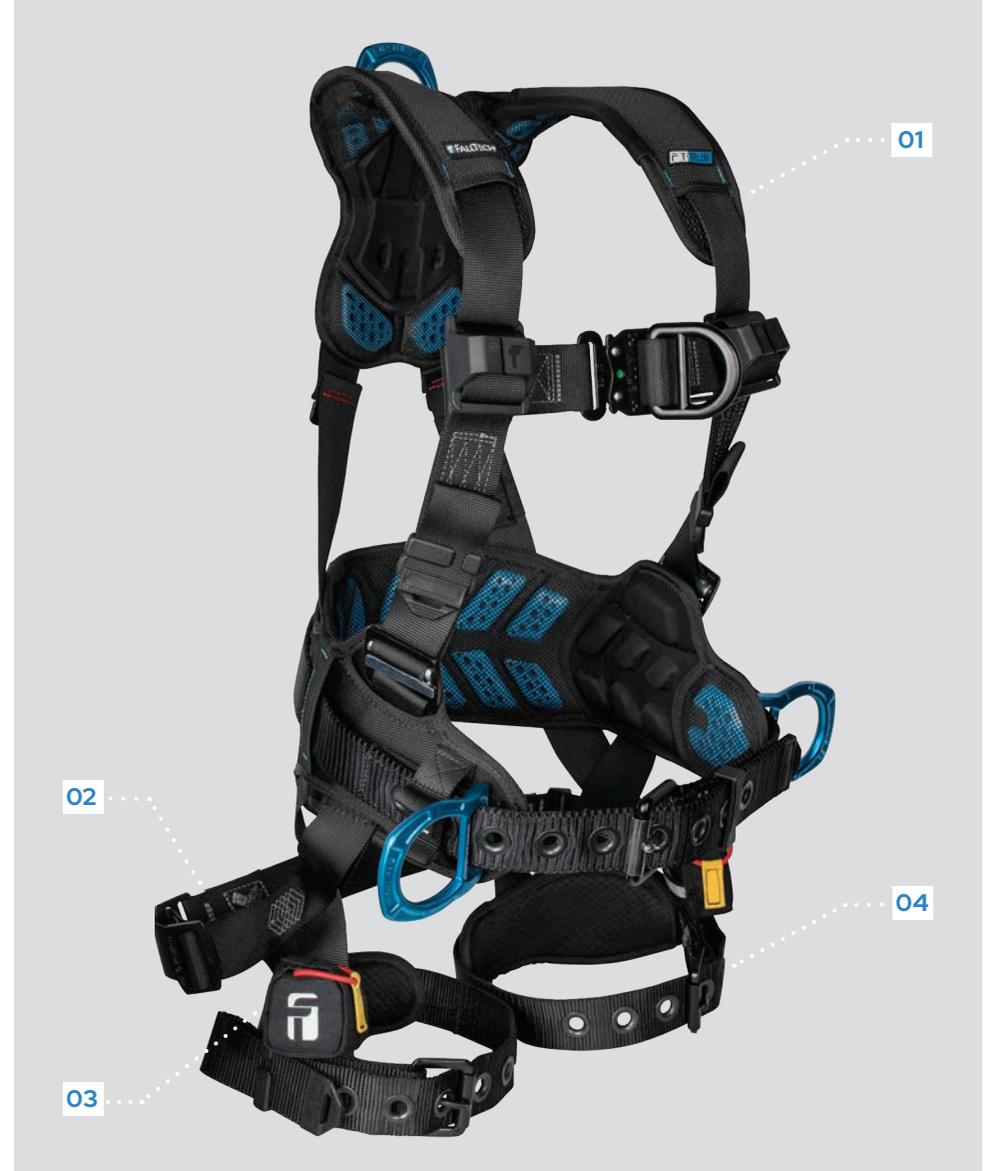



The **FT-OneFit™** Premium Full-Body Harness is designed for professional women working at height. No more compromises: This harness gives users a personalized fit with unique hip adjustability and unmatched comfort.



05 SLIP-RESISTANT ARROWGRIP® D-RING PLATE

Keeps your dorsal D-ring positioned correctly and keeps harness adjustments to a minimum throughout the day. Don't let D-ring slippage compromise your safety or comfort.



06 UPDATED SRL ATTACHMENT POINT

Our convenient SRL attachment design lets you connect all types of single and twin SRLs – faster and easier than ever. No more fumbling with the harness webbing every time you connect.



07 HEAVY-DUTY WAIST BELT

The belt stays firmly in position when carrying the heaviest tools.




08 MODULAR BELT SYSTEM™

A modular belt lacing system lets you custom-configure your tool pouch positions for ease of use, comfort, and efficiency.

Included in belted version only.

Included in belted version only.

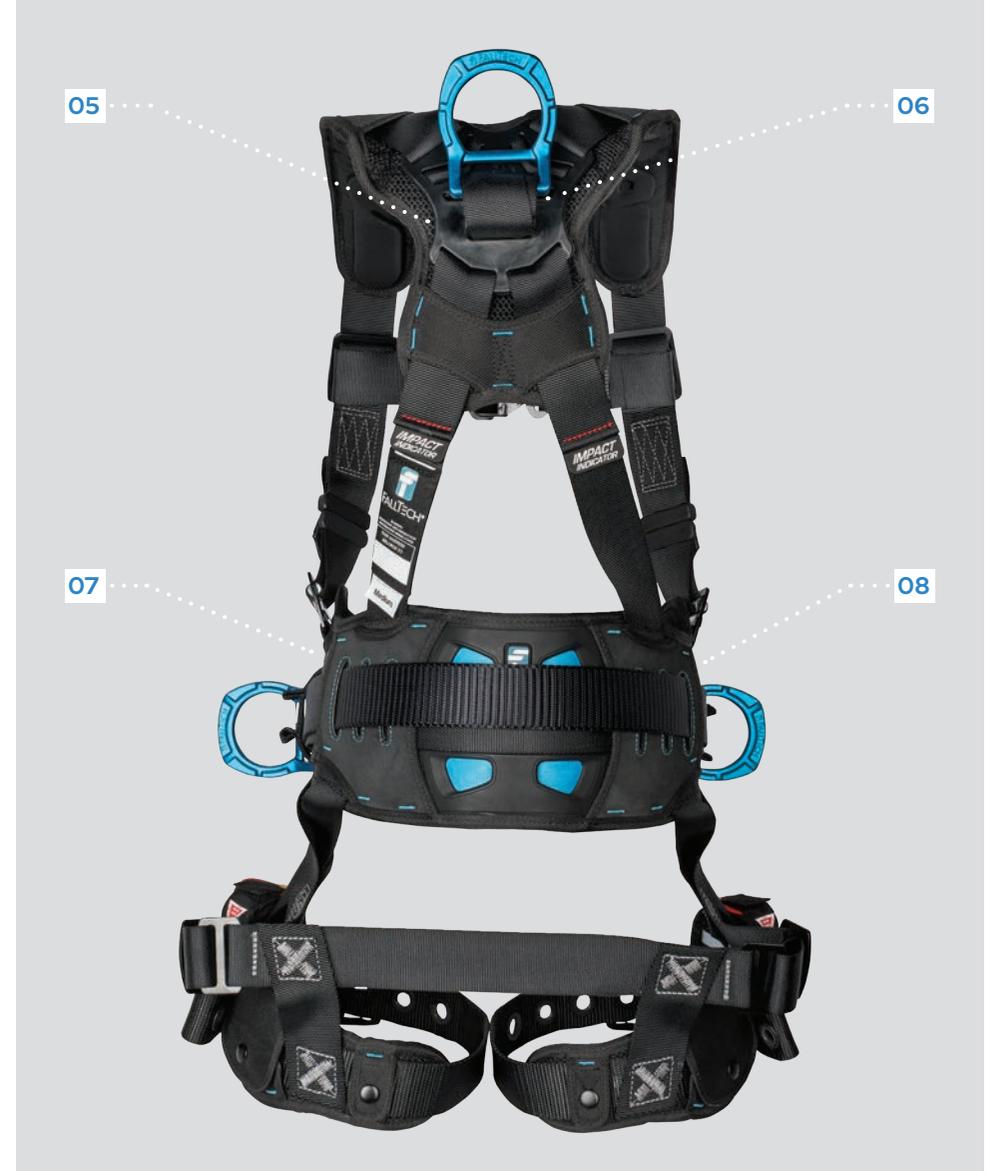



The **FT-OneFit™** Premium Full-Body Harness is designed for professional women working at height. No more compromises: This harness gives users a personalized fit with unique hip adjustability and unmatched comfort.



09 NEOPRENE NECK GUARD

Say goodbye to painful neck irritation. The FT-One Fit's neoprene-lined shoulder pad reduces neck abrasion, enhancing harness comfort all day long.



10 UPGRADED LANYARD KEEPERS


We installed durable lanyard keepers that provide robust functionality for single and double-leg lanyards. They add versatility and reusability while maintaining ANSI compliance.



11 TOOL TETHER ANCHOR POINTS

The waist-belt includes four durable attachment loops for tool tethers. Each tether loop is ANSI / ISEA 121-compliant to carry tools weighing up to 5 pounds.

Included in belted version only.

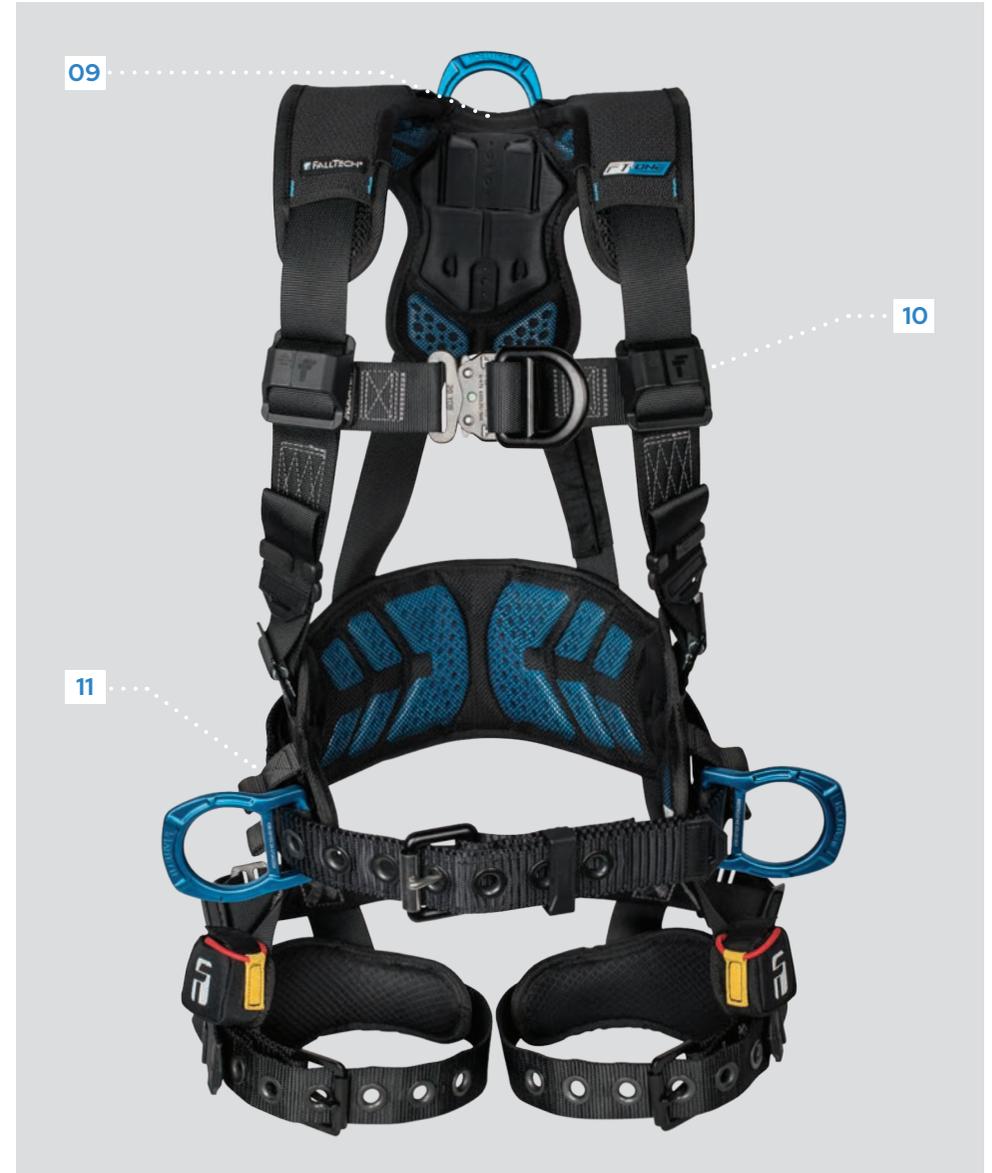



8129QC

FT-One Fit 1D Standard Non-Belted



Material Specifications	
Webbing	Polyester (5,000 lb min. Strength)
D-Ring	Aluminum Alloy (5,000 lb min. Strength)
Adjusters	Aluminum Alloy (3,372 lb min. Strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lb min. Strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lb min. Strength)

Relevant Standards	
ANSI	Z359.11-2014
OSHA	1910.140, 1926.502

Performance Specifications	
Static Strength	3,600 lb min.
ANSI User Capacity	One user up to 310 lb max
OSHA User Capacity	Allowable up to 425 lb max

1D Standard Non-Belted		
Part #	Size	Leg Closure
8129QCXS	Extra Small	Quick Connect
8129QCS	Small	
8129QCM	Medium	
8129QCL	Large	
8129QCXL	Extra Large	
8129QC2X	2X Large	
8129QC3X	3X Large	



8129

FT-One Fit 1D Standard Non-Belted



Material Specifications	
Webbing	Polyester (5,000 lb min. strength)
D-Ring	Aluminum Alloy (5,000 lb min. strength)
Adjusters	Aluminum Alloy (3,372 lb min. strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lb min. strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lb min. strength)

Relevant Standards	
ANSI	Z359.11-2014
OSHA	1910.140, 1926.502

Performance Specifications	
Static Strength	3,600 lb min.
ANSI User Capacity	One user up to 310 lb max
OSHA User Capacity	Allowable up to 425 lb max

1D Standard Non-Belted		
Part #	Size	Leg Closure
8129XS	Extra Small	Tongue Buckle
8129S	Small	
8129M	Medium	
8129L	Large	
8129XL	Extra Large	
81292X	2X Large	
81293X	3X Large	



81293DQC

FT-One Fit 3D Standard Non-Belted



Material Specifications	
Webbing	Polyester (5,000 lb min. strength)
D-Ring	Aluminum Alloy (5,000 lb min. strength)
Adjusters	Aluminum Alloy (3,372 lb min. strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lb min. strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lb min. strength)

Relevant Standards	
ANSI	Z359.11-2014
OSHA	1910.140, 1926.502

Performance Specifications	
Static Strength	3,600 lb min.
ANSI User Capacity	One user up to 310 lb max
OSHA User Capacity	Allowable up to 425 lb max

1D Standard Non-Belted		
Part #	Size	Leg Closure
81293DQCXS	Extra Small	Quick Connect
81293DQCS	Small	
81293DQCM	Medium	
81293DQCL	Large	
81293DQCXL	Extra Large	
81293DQC2X	2X Large	
81293DQC3X	3X Large	



81293D

FT-One Fit 3D Standard Non-Belted



Material Specifications	
Webbing	Polyester (5,000 lb min. strength)
D-Ring	Aluminum Alloy (5,000 lb min. strength)
Adjusters	Aluminum Alloy (3,372 lb min. strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lb min. strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lb min. strength)

Relevant Standards	
ANSI	Z359.11-2014
OSHA	1910.140, 1926.502

Performance Specifications	
Static Strength	3,600 lb min.
ANSI User Capacity	One user up to 310 lb max
OSHA User Capacity	Allowable up to 425 lb max

3D Standard Non-Belted		
Part #	Size	Leg Closure
81293DXS	Extra Small	Tongue Buckle
81293DS	Small	
81293DM	Medium	
81293DL	Large	
81293DXL	Extra Large	
81293D2X	2X Large	
81293D3X	3X Large	



8130QC
FT-One Fit 3D Construction Belted



Material Specifications	
Webbing	Polyester (5,000 lb min. strength)
D-Ring	Aluminum Alloy (5,000 lb min. strength)
Adjusters	Aluminum Alloy (3,372 lb min. strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lb min. strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lb min. strength)

Relevant Standards	
ANSI	Z359.11-2014
OSHA	1910.140, 1926.502

Performance Specifications	
Static Strength	3,600 lb min.
ANSI User Capacity	One user up to 310 lb max
OSHA User Capacity	Allowable up to 425 lb max

3D Construction Belted		
Part #	Size	Leg Closure
8130QCXS	Extra Small	Quick Connect
8130QCS	Small	
8130QCM	Medium	
8130QCL	Large	
8130QCXL	Extra Large	
8130QC2X	2X Large	
8130QC3X	3X Large	



8130
FT-One Fit 3D Construction Belted



Material Specifications	
Webbing	Polyester (5,000 lb min. strength)
D-Ring	Aluminum Alloy (5,000 lb min. strength)
Adjusters	Aluminum Alloy (3,372 lb min. strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lb min. strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lb min. strength)

Relevant Standards	
ANSI	Z359.11-2014
OSHA	1910.140, 1926.502

Performance Specifications	
Static Strength	3,600 lb min.
ANSI User Capacity	One user up to 310 lb max
OSHA User Capacity	Allowable up to 425 lb max

3D Construction Belted		
Part #	Size	Leg Closure
8130XS	Extra Small	Tongue Buckle
8130S	Small	
8130M	Medium	
8130L	Large	
8130XL	Extra Large	
81302X	2X Large	
81303X	3X Large	



8130FDQC

FT-One Fit 4D Construction Climbing Belted



Material Specifications	
Webbing	Polyester (5,000 lb min. strength)
D-Ring	Aluminum Alloy (5,000 lb min. strength)
Adjusters	Aluminum Alloy (3,372 lb min. strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lb min. strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lb min. strength)

Relevant Standards	
ANSI	Z359.11-2014
OSHA	1910.140, 1926.502

Performance Specifications	
Static Strength	3,600 lb min.
ANSI User Capacity	One user up to 310 lb max
OSHA User Capacity	Allowable up to 425 lb max

4D Construction Climbing Belted		
Part #	Size	Leg Closure
8130FDQCXS	Extra Small	Quick Connect
8130FDQCS	Small	
8130FDQCM	Medium	
8130FDQCL	Large	
8130FDQCXL	Extra Large	
8130FDQC2X	2X Large	
8130FDQC3X	3X Large	



8130FD

FT-One Fit 4D Construction Climbing Belted



Material Specifications	
Webbing	Polyester (5,000 lb min. strength)
D-Ring	Aluminum Alloy (5,000 lb min. strength)
Adjusters	Aluminum Alloy (3,372 lb min. strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lb min. strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lb min. strength)

Relevant Standards	
ANSI	Z359.11-2014
OSHA	1910.140, 1926.502

Performance Specifications	
Static Strength	3,600 lb min.
ANSI User Capacity	One user up to 310 lb max
OSHA User Capacity	Allowable up to 425 lb max

4D Construction Climbing Belted		
Part #	Size	Leg Closure
8130FDXS	Extra Small	Tongue Buckle
8130FDS	Small	
8130FDM	Medium	
8130FDL	Large	
8130FDXL	Extra Large	
8130FD2X	2X Large	
8130FD3X	3X Large	

Find Our Full Selection of Fall Protection Products at FallTech.com



©2025 Alexander Andrew, Inc
1306 S. Alameda St.
Compton, CA. 90221-4803

Tel / 323.752.0066

Fax / 323.752.5613

Tools shown not included.

Product description and specifications
herein may change without notice.

U.S. and International Patents Pending.

