

FALLTECH®

FT-R®
LEADING EDGE

Premium SRL
420 lb

AXIS™-Enabled

Class 2
Anchor above or below dorsal D-ring

FT-R LEADING EDGE

The class-dominating FT-R has gotten even better thanks to new engineering and design innovations. With a 35% increase in load capacity, the FT-R now delivers effortless movement and unrivaled protection for workers up to 420 pounds. As an ANSI Class 2 device, the FT-R is leading edge rated and allows users to anchor at, above, or up to 5 feet below D-ring. For those demanding the perfect balance of safety, compliance, and efficiency at height, there's no better SRL than the FT-R.





01 ARMORED EA SHOCK PACK

A rigid shell protects the shock pack from dust, UV rays, abrasion, moisture, chemicals and sharp or abrasive edges. Supports workers up to 420 lbs.



02 CONVENIENT DESIGN

A swiveling anchorage connection, a locking carabiner, and an integrated carrying handle streamline installation and transport.



03 LIGHTEST IN ITS CLASS

A revolutionary design slims down weight and size without compromising smooth operation, ensuring an unparalleled user experience.




04 OPTIMIZED MOVEMENT

An advanced internal mechanism minimizes unintentional lockups, giving you seamless movement and maximum productivity.



05 FLEXIBLE ANCHORAGE

Easily anchor overhead or up to 5 feet below the user's dorsal D-ring. Designed for optimal performance in all orientations and locations, wherever you need it.

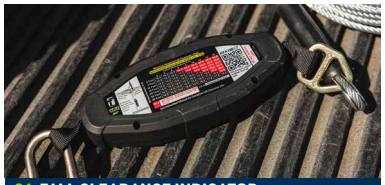


06 FALL CLEARANCE INDICATOR

A wear- and UV-resistant fall clearance label included on the shock pack cover. Also includes scannable AXIS fall safety QR code.



07 PROTECTED LABELING

UV-resistant and scratch-resistant labels ensures legibility in the tough work environments.

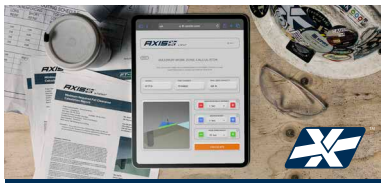

08 AXIS™ ENABLED

The FT-R comes AXIS-ready. AXIS is a revolutionary fall safety calculator that lets users calculate minimum required fall clearance quickly, simply, and precisely via mobile device or personal computer.

The FT-R features a 7/32-inch galvanized steel cable available in 20-, 30- and 60-foot lengths. Whichever you choose, work with confidence knowing that the FT-R is tested to meet or exceed OSHA, ANSI, and CSA standards.



721520LEC
FRONT VIEW

721520LECB
FRONT VIEW

721530LEC
FRONT VIEW

721560LEC
FRONT VIEW

MATERIAL SPECIFICATIONS	
Housing	Glass-Reinforced Nylon
Cable	7/32" Galvanized Steel Wire Rope (3,600 lb min. strength)
Lifeline Connector	Plated Alloy Steel (5,000 lb min. strength with 3,600 lb min. gate strength)
Anchorage Connector	Plated Alloy Steel (5,000 lb min. strength with 3,600 lb min. gate strength)

PART #	LENGTH
721520LEC	20'
721520LECB	20'
721530LEC	30'
721560LEC	60'

RELEVANT STANDARDS	
ANSI	Z359.11-2021
OSHA	1910.140, 1926.502
CSA	Z259.2.2-17 (R2022)

PERFORMANCE SPECIFICATIONS	
ANSI SRL Class/Type	Class 2 SRL
Maximum Arrest Force	1,800 lb
Average Arrest Force	1,575 lb or less
Maximum Arrest Distance	42 in. or less
Static Strength	3,600 lb min.
ANSI User Capacity	One user up to 310 lb max
OSHA User Capacity	One user up to 420 lb max

Find Our Full Selection of Fall Protection Products at FallTech.com

FALLTECH®

©2026 Alexander Andrew, Inc

1306 S. Alameda St.
Compton, CA. 90221-4803

Tel / 323.752.0066

Fax / 323.752.5613

Tools shown not included.

Product description and specifications herein may change without notice.

U.S. and International Patents Pending.

@falltechsafety @falltechsafety @falltechsafety @falltech @falltechsafety