

FALLTECH®



ARC-FLASH ⚠

FT-R®

SRL-R

Premium SRL-R

Built on the premium performance of the FT-R platform, the FT-R Arc Flash SRL-R delivers confident control in the toughest arc-risk environments. This latest edition to FallTech's premium FT-series products combines smooth lifeline movement, intuitive retrieval operation, and proven arc-rated protection—so you can enter, work, and exit with complete trust in your gear.



**01 ARC FLASH PROTECTION**

ASTM F887-rated with a tough Technora® lifeline built to stand up to the blistering heat and crushing power of arc flash hazards when performance matters most.



**02 DUAL-MODE FUNCTIONALITY**

Simplified controls make switching from fall arrest to rescue fast and direct—just pull the plunger pin and shift the crank. No tools. No delays.



**03 OPTIMIZED MOVEMENT**

A refined internal system cuts down nuisance lockups, delivering smooth, natural motion every step.



**04 LIGHTWEIGHT & ROBUST DESIGN**

Engineered to be lighter than leading units without giving up an ounce of strength.




**05 EASY INSTALLATION**

Fast, secure mounting to tripods or modular davits ensures reliable performance in the tightest spaces.



**06 PROTECTED LABELS**

UV- and scratch-resistant labels help keep key information legible—and units compliant—in tough work environments.

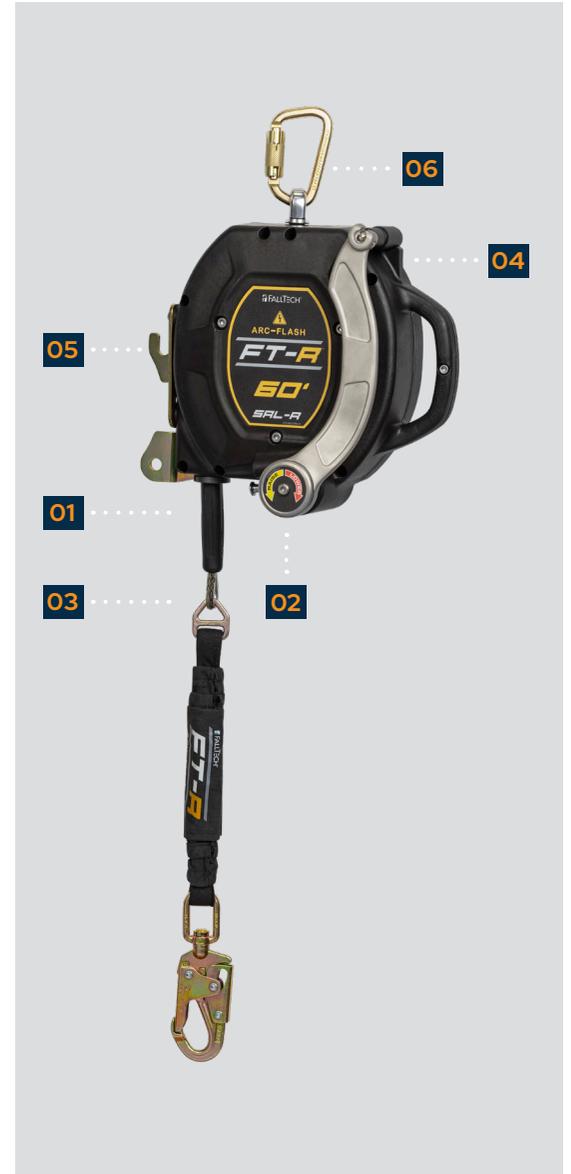

When arc flash risk is part of the job, there is no margin for failure. The FT-R Arc Flash SRL-R meets strict OSHA, ANSI, and ASTM standards, delivering proven fall protection and trusted arc flash resistance workers can rely on. The FT-R Arc Flash SRL-R is Class 1 rated for anchoring at, above, or up to 5 feet below D-ring on worksites without edge exposure.



### RELEVANT STANDARDS

- ANSI Z359.14-2021
- ASTM F887-20
- OSHA 1926.502

### MATERIAL SPECIFICATIONS

- **Housing:** Glass-Reinforced Nylon
- **Lifeline:** ¼" Technora® Rope (3,600 lb. min. strength)
- **Lifeline Connector:** Overmolded/Plated Alloy Steel (5,000 lb. min. strength with 3,600 lb. min. gate strength)
- **Anchorage Connector:** Variable (5,000 lb. min. strength with 3,600 lb. min. gate strength)

### PERFORMANCE SPECIFICATIONS

- **Max Arrest Force:** 1,800 lbs.
- **Average Arrest Force:** 1,575 lbs. or less
- **Max Arrest Distance:** 42 in. or less
- **Static Strength:** 3,600 lbs. (min.)
- **Max User Capacity (ANSI):** 310 lbs.
- **Max User Capacity (OSHA):** 420 lbs.

Part Number	Description
721560RT	FT-R Arc Flash SRL-R (60') w/ Steel Snap Hook
721560RTD1	FT-R Arc Flash SRL-R (60') w/ Dielectric Snap Hook
7508TB	8' Tripod Kit w/ FT-R Arc Flash SRL-R (721560RT) + Storage Bags
7509TB	8' Tripod Kit w/ FT-R Arc Flash SRL-R (721560RT) and Personnel Winch (7297T) + Storage Bags

---

# Find Our Full Selection of Fall Protection Products at FallTech.com

---



©2025 Alexander Andrew, Inc.  
1306 S. Alameda St.  
Compton, CA 90221-4803

Tel / 323.752.0066

Fax / 323.752.5613

Tools shown not included.

Product description and specifications  
herein may change without notice.

U.S. and International Patents Pending.

