

FALLTECH®

**FT-R+**  
LEADING EDGE SYSTEM

**The Ultimate SRL**



## FallTech® continues to redefine fall protection with the launch of the FT-R+™, a groundbreaking evolution of our best-selling FT-R™ self-retracting lifeline.

The FT-R+ is the first-ever ANSI Class 2 SRL designed for on-the-jobsite repair, transforming how SRLs are maintained in the field. Built upon the foundation of our FT-R premium SRL, this innovative design allows safety professionals to quickly and safely replace damaged cable lifelines directly on-site in just minutes, reducing the costs, lost productivity, and extended delays often experienced with SRL repairs.

Central to this innovation is SpeedLine™, an advanced system that simplifies cable disassembly and replacement into a few quick and easy steps. Complementing SpeedLine is LineLoc™, a secure mechanism that ensures replaced cables are safely locked in place, combining ease of use with true safety.

### The FT-R+ maintains the same trusted features that have made the FT-R a leader in premium SRLs:


- Rated for end user capacity of 420 lb
- Lightweight, industry-leading design
- Swivel anchorage connector for enhanced mobility
- Integrated carry handle for easy transport
- Optimized for smooth working and walking speeds without nuisance lockups
- Durable, UV- and scratch-resistant labels

The FT-R+ combines unmatched convenience with cost-efficiency, reducing downtime while maintaining the highest safety standards. Seamlessly integrating cutting-edge innovation with reliable performance, the FT-R+ sets a new benchmark in fall protection.



## The FT-R+ will launch with the following part numbers:

Part Number	Description
721730LEKIT	30' FT-R+ SRL Kit (SRL + 30' Replacement Cable + Tool Set)
721730LER	30' FT-R+ SRL
721730LERK	30' Replacement Cable
5048	Replacement Tool Set (Spacer Tool + Screwdriver + Torx® L- Key)

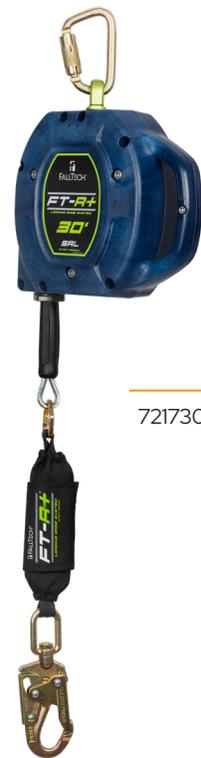

721730LER

## The FT-R+ complies with the following standards:

- ANSI Z359.14-2021
- OSHA 1910.140
- OSHA 1926.502
- CSA Z259.2.2-17 (R2022)

## Below are performance specs:

- Maximum Arrest Force: 1,800 lb
- Average Arrest Force: 1,575 lb or less
- Maximum Arrest Distance: 42 in. or less
- Static Strength: 3,600 lb min.



5048



721730LERK