

 FALLTECH®



**FT-X™**

**EDGE CORE™**  
LEADING EDGE

Patent Pending

Falltech® introduces the new, Patent Pending, 6' FT-X™ EdgeCore™ Class 2 Leading Edge Self-retracting Lifeline series engineered for those who will not compromise on safety, compliance, worker comfort, and efficiency when working at height.

6' Class 2 Leading Edge

FT-X™ EdgeCore



### Retractable Units

Compact design keeps retractable units close to the body's center line to reduce fatigue and positions away from the back to minimize discomfort from rubbing or pressure from resting



### Triple Action Connector

Proprietary aluminum alloy dorsal connector provides simplified push button attachment with visual locking indicators



### Compact, Extended Capacity Energy Absorber

420 lb. worker rated extended capacity energy absorber's low-profile shape reduces heat and sweat build up and is protected by an abrasion resistant cover




### Lightweight, Durable Housings

Engineered housing material provides durability and flexibility at low weight. Dark blue color distinguishes the below D-ring and leading edge capability of FT Class 2 SRLs



### EdgeCore™ Lifeline

Innovative lifeline design is not a webbing but a structure of multiple Kevlar® cables with UV-resistant Composite jacket providing ultimate strength and durability over leading edge hazards. EdgeCore is 40% lighter than most Class 2 Leading Edge SRLP cable lifelines

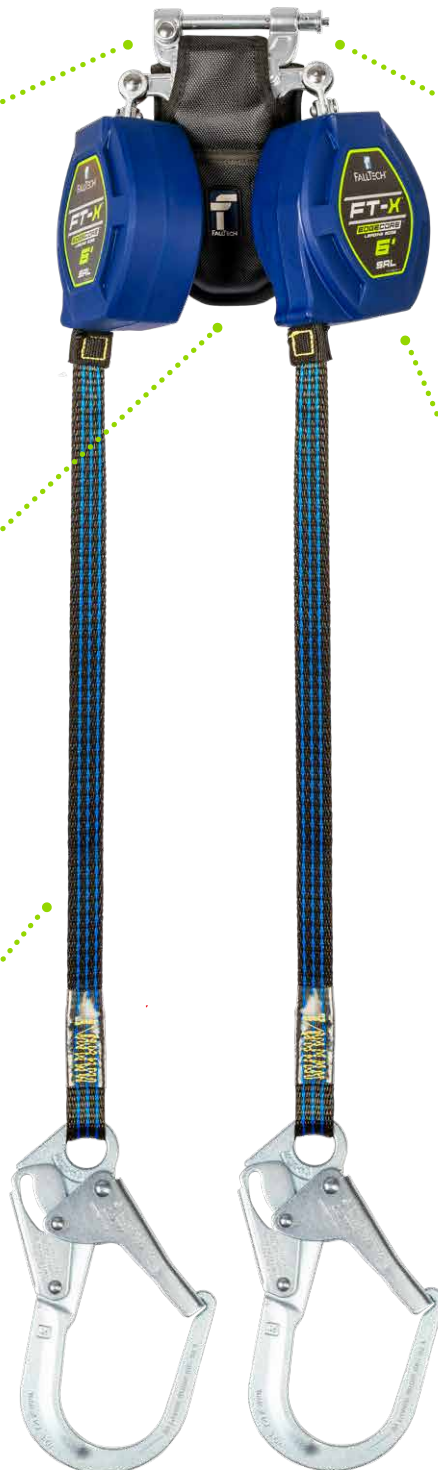

84106TP3  
Patent Pending

Falltech® introduces the new, Patent Pending, 6' FT-X™ EdgeCore™ Class 2 Leading Edge Self-retracting Lifeline series engineered for those who will not compromise on safety, compliance, worker comfort, and efficiency when working at height.

6' Class 2 Leading Edge

FT-X™ EdgeCore





### Ergonomic Comfort Design

Compact design elevates the SRD connection points to align optimally with worker motion to minimize fatigue and increase productivity



### Optimized Lock-up Speed

Internal mechanism design minimizes unintentional lockups to keep you moving freely with no interruption in productivity

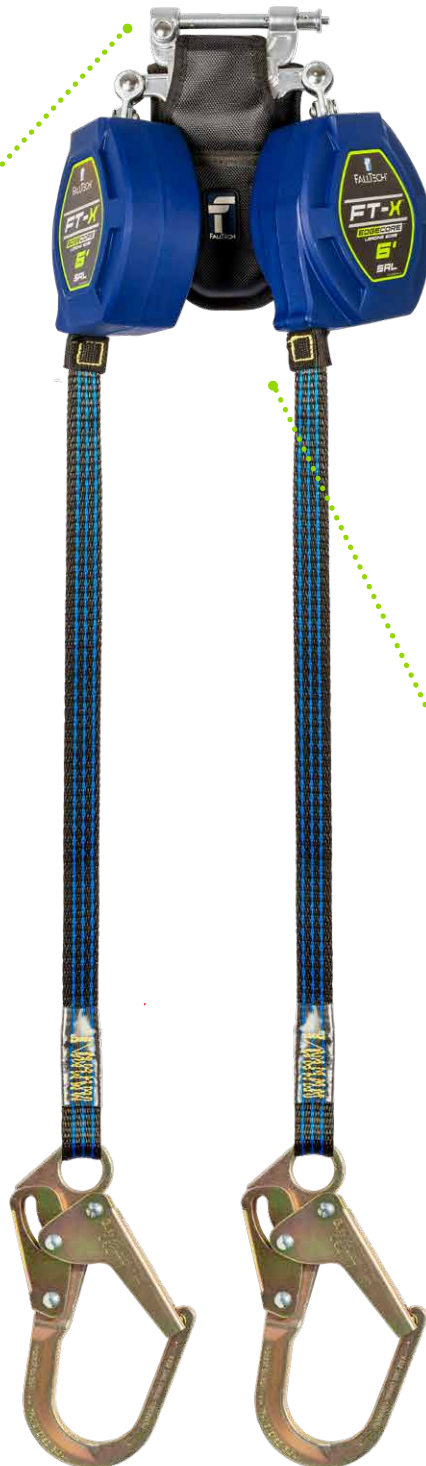

### ANSI Z359.14-2021 Class 2 Compliant


Suitable for below D-ring tie-off up to five feet and leading edge exposures and hazards, including steel and precast concrete



### Labels

Comprehensive fall clearance charts and tables included inside the energy absorber cover offer easily accessible reference contributing toward safety at all times

Falltech® introduces the new, Patent Pending, 6' FT-X™ EdgeCore™ Class 2 Leading Edge Self-retracting Lifeline series engineered for those who will not compromise on safety, compliance, worker comfort, and efficiency when working at height.

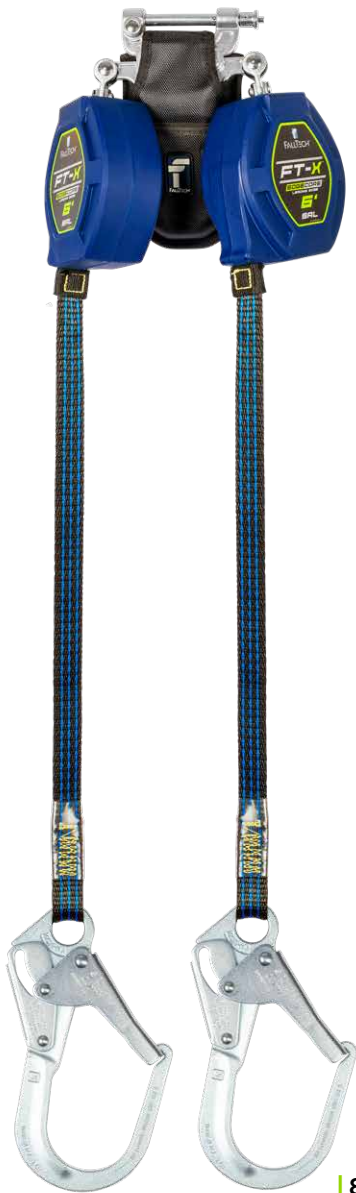

84106TP3

Performance Specifications	
<b>ANSI SRL Class/Type</b>	Class 2 SRL
<b>Maximum Arrest Force</b>	1,800 lb
<b>Average Arrest Force</b>	1,575 lb or less
<b>Maximum Arrest Distance</b>	42 in or less
<b>Static Strength</b>	3,600 lbs Minimum
<b>ANSI User Capacity</b>	One User up to 310 lbs. Max
<b>OSHA User Capacity</b>	One User up to 420 lbs. Max

Material Specifications	
<b>Housing</b>	Nylon
<b>Lifeline</b>	EdgeCore™ strength (Kevlar®/Composite) Min. 5,000 lbs.
<b>Leg-ed Connector</b>	Variable 5,000 lb min. strength with 3,600 lb min. gate strength
<b>Dorsal Connector</b>	Aluminum Alloy 5,000 lb min. strength

Relevant Standards	
<b>ANSI</b>	ANSI Z359.14-2021 Class 2
<b>OSHA</b>	1926.502, 1910.140

Part #	Leg-end Connector
<b>84106TP0</b>	Steel Mini Rebar Hook
<b>84106TP1</b>	Steel Snap Hook
<b>84106TP3</b>	Steel Rebar Hook
<b>84106TP5</b>	Aluminum Rebar Hook



Steel Mini Rebar Hook



Steel Snap Hook



Steel Rebar Hook



Aluminum Rebar Hook

Discover the full selection of all  
our fall protection products at  
[www.falltech.com](http://www.falltech.com)



Tel / 323.752.0066

Fax / 323.752.5613

©2023 Alexander Andrew, Inc  
1306 S. Alameda St. Compton,  
CA. 90221-4803

Tools shown not included.

Product description and specifications  
herein may change without notice.

U.S. and International Patents Pending.

