

 FALLTECH®



ARC-FLASH 

FT-X™

EDGE CORE™
LEADING EDGE

FallTech® introduces the new Patent Pending, 8' FT-X™ EdgeCore™ Arc-Flash. The first Class 2 Arc Flash SRL-P to have ever been introduced. This Class 2 SRL-P is a true go anywhere, do anything device that is engineered for those who do not compromise on safety, compliance, worker comfort, and efficiency when working at height.

8' Class 2 SRL-P

FT-X™ EdgeCore



Retractable Units

Compact design keeps retractable units close to the body's center line to reduce fatigue and positions away from the back to minimize discomfort from rubbing or pressure from resting




Compact, Extended Capacity Energy Absorber

420 lb. worker rated extended capacity energy absorber's low-profile shape reduces heat and sweat build up and is protected by an abrasion resistant Nomex® cover.



EdgeCore™ Lifeline

Features a 100% Kevlar® version of FallTech's innovative EdgeCore™ synthetic lifeline providing both arc flash AND leading edge protection.

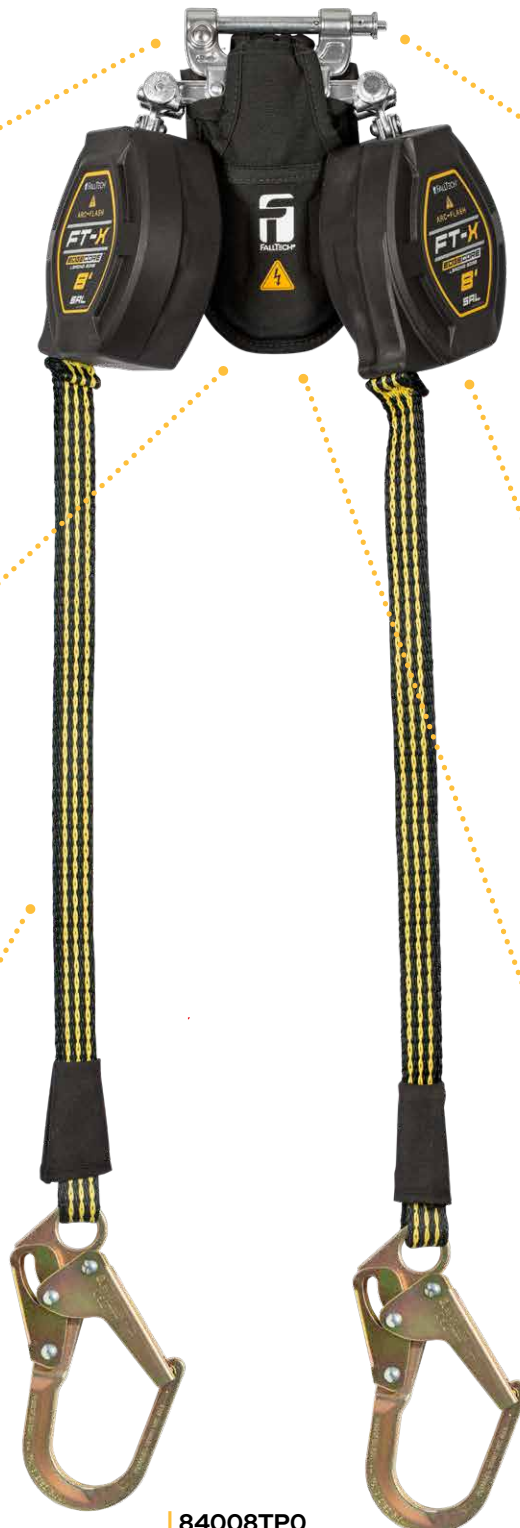

Triple Action Connector

Proprietary aluminum alloy dorsal connector provides simplified push button attachment with visual locking indicators



Lightweight, Durable Housings

Engineered housing material provides durability and flexibility at low weight. Black color distinguishes Arc Flash capability.



Labels

Comprehensive fall clearance charts and tables included inside the energy absorber cover offer easily accessible reference contributing toward safety at all times

84008TP0

FallTech® introduces the new Patent Pending, 8' FT-X™ EdgeCore™ Arc-Flash. The first Class 2 Arc Flash SRL-P to have ever been introduced. This Class 2 SRL-P is a true go anywhere, do anything device that is engineered for those who do not compromise on safety, compliance, worker comfort, and efficiency when working at height.

8' Class 2 SRL-P

FT-X™ EdgeCore



Ergonomic Comfort Design

Compact design elevates the SRD connection points to align optimally with worker motion to minimize fatigue and increase productivity



Optimized Lock-up Speed

Internal mechanism design minimizes unintentional lockups to keep you moving freely with no interruption in productivity



Arc Flash Compliant

ASTM F887 Arc Flash Compliant



SpeedLink™ Field Replaceability

Industry first field replaceable Class 2 Leading Edge SRL-P provides overall lowest cost of ownership and less equipment downtime. For twin FT-X SRLs the retractable unit with damaged lifeline or inspection failure can be immediately replaced on site easily and safely thanks to the simple SpeedLink™ mechanism and visual locking indicators



Class
2
Anchor above or below dorsal D-ring

ANSI Z359.14-2021 Class 2 Compliant

Suitable for below D-ring tie-off up to five feet and leading edge exposures and hazards, including steel and precast concrete



| 84008TP0S

FallTech® introduces the new Patent Pending, 8' FT-X™ EdgeCore™ Arc-Flash. The first Class 2 Arc Flash SRL-P to have ever been introduced. This Class 2 SRL-P is a true go anywhere, do anything device that is engineered for those who do not compromise on safety, compliance, worker comfort, and efficiency when working at height.

8' Class 2 SRL-P


FT-X™ EdgeCore



Steel Mini Rebar Hook



Steel Swivel Mini Rebar Hook



Steel Snap Hook



Steel Swivel Snap Hook



Steel Swivel Rebar Hook



Dielectric Snap Hook



| 84008TP0

| 84008SP0

Part #	Single or Twin	Leg-end Connector
84008SP0	Single	Steel Mini Rebar Hook
84008SP0S	Single	Steel Swivel Mini Rebar Hook
84008SP1	Single	Steel Snap Hook
84008SP2	Single	Steel Swivel Snap Hook
84008SP3S	Single	Steel Swivel Rebar Hook
84008SPD1	Single	Dielectric Snap Hook
84008TP0	Twin	Steel Mini Rebar Hook
84008TP0S	Twin	Steel Swivel Mini Rebar Hook
84008TP1	Twin	Steel Snap Hook
84008TP2	Twin	Steel Swivel Snap Hook
84008TP3S	Twin	Steel Swivel Rebar Hook
84008TPD1	Twin	Dielectric Snap Hook
84008RP0	Replacement	Steel Mini Rebar Hook
84008RP0S	Replacement	Steel Swivel Mini Rebar Hook
84008RP1	Replacement	Steel Snap Hook
84008RP2	Replacement	Steel Swivel Snap Hook
84008RP3S	Replacement	Steel Swivel Rebar Hook
84008RPD1	Replacement	Dielectric Snap Hook

Performance Specifications	
ANSI SRL Class/Type	Class 2 SRL-P
Maximum Arrest Force	1,800 lb
Average Arrest Force	1,575 lb or less
Maximum Arrest Distance	42 in or less
Static Strength	3,600 lbs Minimum
ANSI User Capacity	One User up to 310 lbs. Max
OSHA User Capacity	One User up to 425 lbs. Max

Material Specifications	
Housing	Nylon
Lifeline	EdgeCore™ (Kevlar®) (Min. 5,000 lbs.)
Leg-end Connector	Variable (5,000 lb min. strength with 3,600 lb min. gate strength)
Dorsal Connector	Aluminum Alloy (5,000 lb min. strength)

Relevant Standards	
ANSI	Z359.14-2021
ASTM	F887-20
OSHA	1926.502, 1910.140

Discover the full selection of all
our fall protection products at
www.FallTech.com



Tel / 323.752.0066

Fax / 323.752.5613

**©2024 Alexander Andrew, Inc
1306 S. Alameda St. Compton,
CA. 90221-4803**

Tools shown not included.

Product description and specifications
herein may change without notice.

U.S. and International Patents Pending.



@falltechsafety



@falltech



@falltechsafety



@falltech