

 FALLTECH®

ARC-FLASH ⚡

**FT-X**

**EDGECORE**  
LEADING EDGE

**TIE-BACK**



WALLTOP  
&  
ARC-FLASH  
**FT-X**  
EDGECORE  
LEADING EDGE  
TIE-BACK  
5' 8"

**FT-WELD**



FallTech® introduces the new Patent Pending, 8' FT-X™ EdgeCore™ Arc-Flash Tie-Back Class 2 Leading Edge SRL-P series. The first Class 2 Arc Flash SRL-P to have ever been introduced. This Class 2 SRL-P is a true go anywhere, do anything device that is engineered for those who do not compromise on safety, compliance, worker comfort, and efficiency when working at height.

8' Class 2 SRL-P

FT-X™ EdgeCore



### Retractable Units

Compact design keeps retractable units close to the body's center line to reduce fatigue and positions away from the back to minimize discomfort from rubbing or pressure from resting




### Compact, Extended Capacity Energy Absorber

420 lb. worker rated extended capacity energy absorber's low-profile shape reduces heat and sweat build up and is protected by an abrasion resistant Nomex® cover.



### EdgeCore™ Lifeline

Features a 100% Kevlar® version of FallTech's innovative EdgeCore™ synthetic lifeline providing both arc flash AND leading edge protection.

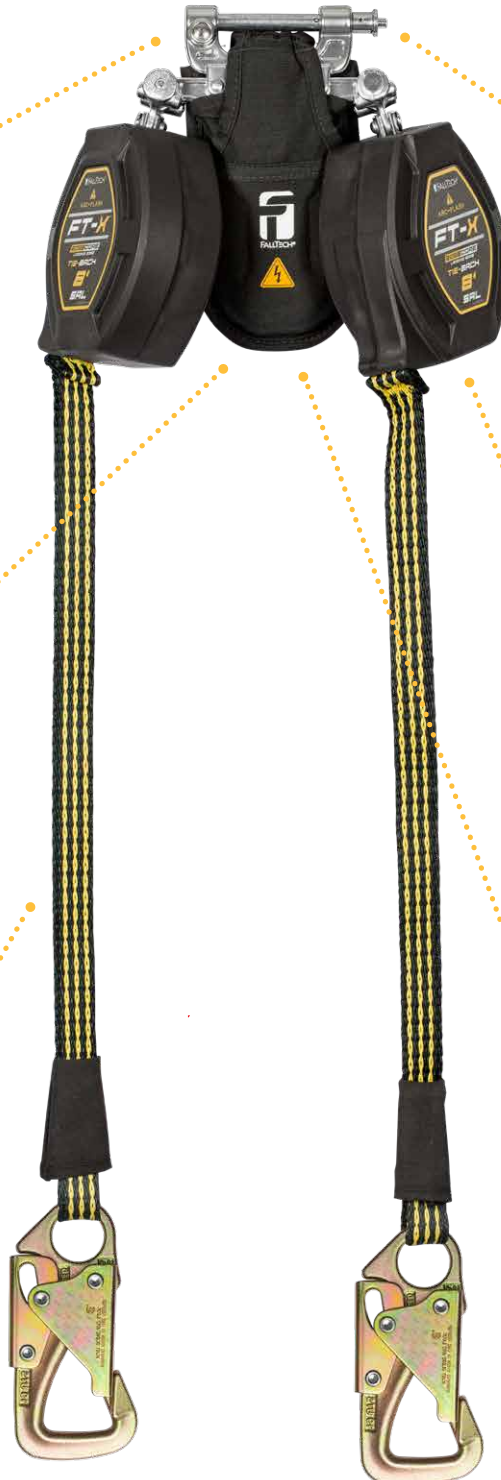

### Triple Action Connector

Proprietary aluminum alloy dorsal connector provides simplified push button attachment with visual locking indicators



### Lightweight, Durable Housings

Engineered housing material provides durability and flexibility at low weight. Black color distinguishes Arc Flash capability.



### Labels

Comprehensive fall clearance charts and tables included inside the energy absorber cover offer easily accessible reference contributing toward safety at all times

FallTech® introduces the new Patent Pending, 8' FT-X™ EdgeCore™ Arc-Flash Tie-Back Class 2 Leading Edge SRL-P series. The first Class 2 Arc Flash SRL-P to have ever been introduced. This Class 2 SRL-P is a true go anywhere, do anything device that is engineered for those who do not compromise on safety, compliance, worker comfort, and efficiency when working at height.

8' Class 2 SRL-P

FT-X™ EdgeCore




### Ergonomic Comfort Design

Compact design elevates the SRD connection points to align optimally with worker motion to minimize fatigue and increase productivity



### Optimized Lock-up Speed

Internal mechanism design minimizes unintentional lockups to keep you moving freely with no interruption in productivity




### Arc Flash Compliant

ASTM F887 Arc Flash Compliant



### SpeedLink™ Field Replaceability

Industry first field replaceable Class 2 Leading Edge SRL-P provides overall lowest cost of ownership and less equipment downtime. For twin FT-X SRLs the retractable unit with damaged lifeline or inspection failure can be immediately replaced on site easily and safely thanks to the simple SpeedLink™ mechanism and visual locking indicators



### ANSI Z359.14-2021 Class 2 Compliant


Suitable for below D-ring tie-off up to five feet and leading edge exposures and hazards, including steel and precast concrete

| 84008TP8

FallTech® introduces the new Patent Pending, 8' FT-X™ EdgeCore™ Arc-Flash Tie-Back Class 2 Leading Edge SRL-P series. The first Class 2 Arc Flash SRL-P to have ever been introduced. This Class 2 SRL-P is a true go anywhere, do anything device that is engineered for those who do not compromise on safety, compliance, worker comfort, and efficiency when working at height.

8' Class 2 SRL-P

FT-X™ EdgeCore




Steel 5K Carabiner



Steel 5K Snap Hook



| 84008TP8

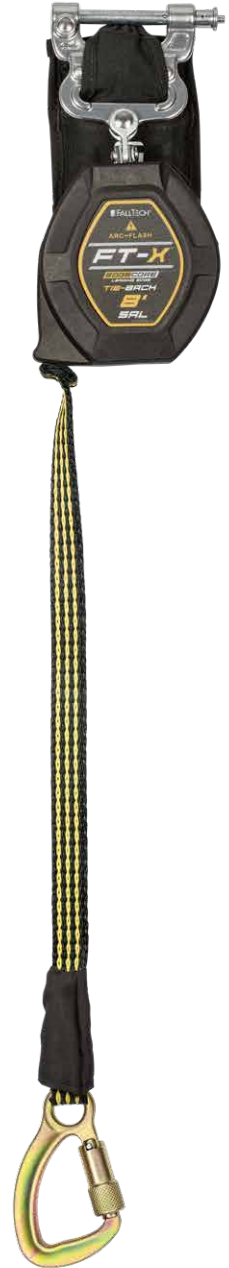

| 84008SP8

Part #	Single or Twin	Leg-end Connector
84008SP8	Single	Steel 5k Carabiner
84008SP8S	Single	Steel 5k Snap Hook
84008TP8	Twin	Steel 5k Carabiner
84008TP8S	Twin	Steel 5k Snap Hook
84008RP8	Replacement	Steel 5k Carabiner
84008RP8S	Replacement	Steel 5k Snap Hook

Performance Specifications	
ANSI SRL Class/Type	Class 2 SRL-P
Maximum Arrest Force	1,800 lb
Average Arrest Force	1,575 lb or less
Maximum Arrest Distance	42 in or less
Static Strength	3,600 lbs Minimum
ANSI User Capacity	One User up to 310 lbs. Max
OSHA User Capacity	One User up to 425 lbs. Max

Material Specifications	
Housing	Nylon
Lifeline	EdgeCore™ (Kevlar®) (Min. 5,000 lbs.)
Leg-end Connector	Pleated Alloy Steel (5,000 lb min. strength with 5,600 lb min. gate strength)
Dorsal Connector	Aluminum Alloy (5,000 lb min. strength)

Relevant Standards	
ANSI	Z359.14-2021
ASTM	F887-20
OSHA	1926.502, 1910.140

Discover the full selection of all  
our fall protection products at  
[www.FallTech.com](http://www.FallTech.com)



Tel / 323.752.0066

Fax / 323.752.5613

©2024 Alexander Andrew, Inc  
1306 S. Alameda St. Compton,  
CA. 90221-4803

Tools shown not included.

Product description and specifications  
herein may change without notice.

U.S. and International Patents Pending.

