



FALLTECH[®]

FT-X[™]

EDGECORE[™]
LEADING EDGE

TIE-BACK

Patent Pending

FallTech® introduces the 8' FT-X EdgeCore™ Class 2 Leading Edge Tie-Back Self-retracting Lifeline series engineered for those who will not compromise on safety, compliance, worker comfort, worker efficiency, and anchorage location variability when working at height.

8' Class 2 Leading Edge Tie-Back

FT-X™ Edgecore



Retractable Units

Compact design keeps retractable units close to the body's center line to reduce fatigue and positions away from the back to minimize discomfort from rubbing or pressure from resting.



Triple Action Connector

Proprietary aluminum alloy dorsal connector provides simplified push button attachment with visual locking indicators.



Compact, Extended Capacity Energy Absorber

420 lb. worker rated extended capacity energy absorber's low-profile shape reduces heat and sweat build up and is protected by an abrasion resistant cover.




Lightweight, Durable Housings

Engineered housing material provides durability and flexibility at low weight. Dark blue color distinguishes the below D-ring and leading edge capability of FT Class 2 SRLs.



EdgeCore™ Lifeline

Innovative lifeline design is not a webbing but a structure of multiple Kevlar® cables with UV-resistant Composite jacket providing ultimate strength and durability over leading edge hazards. EdgeCore is 40% lighter than most Class 2 Leading Edge SRLP cable lifelines.

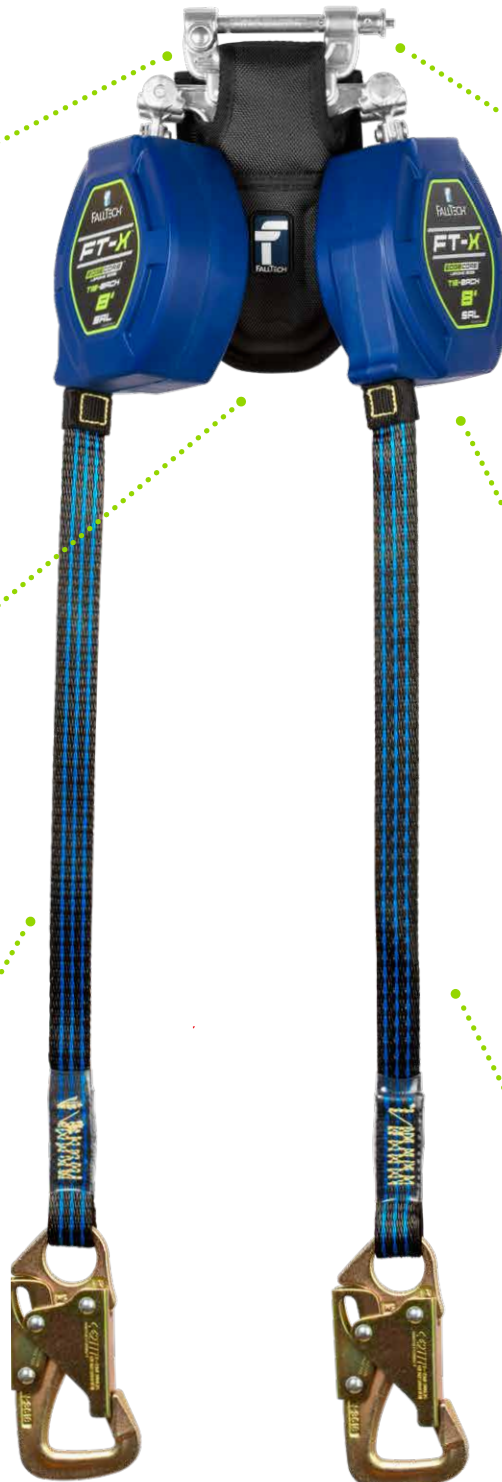

Class
2
Anchor above or below dorsal D-ring

ANSI Z359.14-2021 Class 2 Compliant

Suitable for below D-ring tie-off up to five feet and leading edge exposures and hazards, including steel and precast concrete.

84108TP8S
Patent Pending

FallTech® introduces the 8' FT-X EdgeCore™ Class 2 Leading Edge Tie-Back Self-retracting Lifeline series engineered for those who will not compromise on safety, compliance, worker comfort, worker efficiency, and anchorage location variability when working at height.

8' Class 2 Leading Edge Tie-Back

FT-X™ Edgecore



Ergonomic Comfort Design

Compact design elevates the SRD connection points to align optimally with worker motion to minimize fatigue and increase productivity.




Optimized Lock-up Speed

Compact design elevates the SRD connection points to align optimally with worker motion to minimize fatigue and increase productivity.



Tie-Back Applications

Equipped with 5k rated gate connectors for tie-back applications. Approved to connect directly to anchors with the leg-end connector or tie-back around anchors to any point on the lifeline.

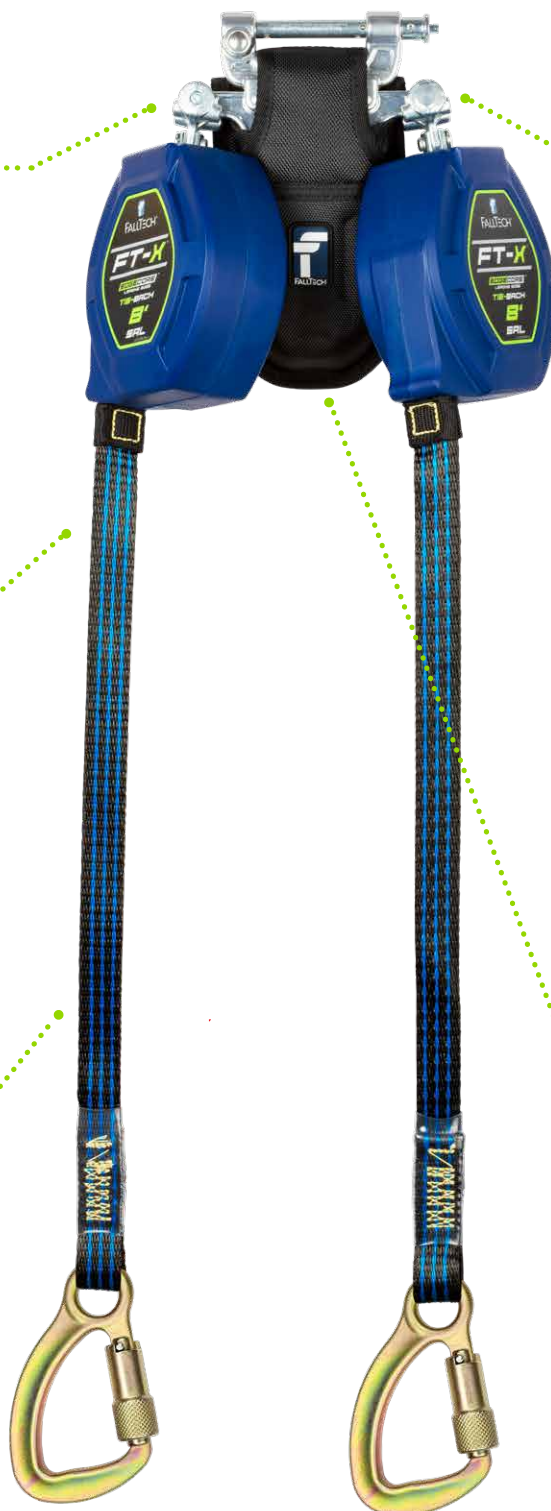

SpeedLink™ Field Replaceability

Industry first field replaceable Class 2 Leading Edge SRL-P provides overall lowest cost of ownership and less equipment downtime. For twin FT-X SRLs the retractable unit with damaged lifeline or inspection failure can be immediately replaced on site easily and safely thanks to the simple SpeedLink™ mechanism and visual locking indicators.



Labels

Comprehensive fall clearance charts and tables included inside the energy absorber cover offer easily accessible reference contributing toward safety at all times

84108TP8
Patent Pending


FallTech® introduces the 8' FT-X EdgeCore™ Class 2 Leading Edge Tie-Back Self-retracting Lifeline series engineered for those who will not compromise on safety, compliance, worker comfort, worker efficiency, and anchorage location variability when working at height.



| 84108TP8S



| 84108SP8S



Steel 5K Carabiner



Steel 5K Snap Hook

Part #	Single or Twin	Leg-end Connector
84108SP8	Single	Steel 5k Carabiner
84108SP8S	Single	Steel 5k Snap Hook
84108TP8	Twin	Steel 5k Carabiner
84108TP8S	Twin	Steel 5k Snap Hook
84108RP8	Replacement	Steel 5k Carabiner
84108RP8S	Replacement	Steel 5k Snap Hook

Performance Specifications	
ANSI SRL Class/Type	Class 2 Tie-Back SRL
Maximum Arrest Force	1,800 lb
Average Arrest Force	1,575 lb or less
Maximum Arrest Distance	42 in or less
Static Strength	3,600 lbs Minimum
ANSI User Capacity	One User up to 310 lbs. Max
OSHA User Capacity	One User up to 420 lbs. Max

Material Specifications	
Housing	Nylon
Lifeline	EdgeCore™ (Min. 3,600 lbs.)
Leg-end Connector	Variable (5,000 lb min. strength with 5,000 lb min. gate strength)
Dorsal Connector	Aluminum Alloy (5,000 lb min. strength)

Relevant Standards	
ANSI	ANSI Z359.14-2021 Class 2
OSHA	1926.502, 1910.140

Discover the full selection of all
our fall protection products at
www.FallTech.com



Tel / 323.752.0066

Fax / 323.752.5613

**©2024 Alexander Andrew, Inc
1306 S. Alameda St. Compton,
CA. 90221-4803**

Tools shown not included.

Product description and specifications
herein may change without notice.

U.S. and International Patents Pending.

Part #480-00049



@falltechsafety



@falltech



@falltechsafety



@falltech