



 **FALLTECH®**

**Premium Full-Body Harness
for General Industry**
Patent Pending





INTRODUCING THE FT-1910™ A HARNESS BUILT FOR INDUSTRY HEROES

Maintenance workers are the unsung heroes of every facility, ensuring everything runs smoothly. The FT-1910 harness is designed to support these professionals, meeting the unique demands of industrial work.

Built to last, the FT-1910 features 25% thicker webbing treated with anti-microbial and water-repellent finishes, offering durability in even the harshest conditions. Whether dealing with heat, chemicals, or grime, this harness holds up.

Comfort is key. The FT-1910's lightweight design and Comfort Legs™ technology provide maximum mobility without pinch points. Leg straps fit securely around the thighs, making it ideal for tight spaces.

Strategically placed lanyard keepers reduce trip hazards and enhance movement.

Named after OSHA's 1910 General Industry Standard, the FT-1910 harness not only complies with safety regulations but embodies the spirit of reliability and action. With a striking green design and brushed aluminum hardware, it's more than just equipment—it's a partner in keeping industries running efficiently and safely.





Every aspect of the FallTech FT-1910 is designed to meet the unique demands of maintenance professionals. With a comfortable, durable, and versatile design, the FT-1910 ensures those who keep our industries running are supported every step of the way.



01 ULTRATECH™ WEBBING

The FT-1910 features webbing enhanced with a moisture-resistant and anti-microbial treatment that protects against moisture, bacteria, and grime, ensuring long-lasting protection against wear and tear.



02 COMFORT GEL PADDING

Gel padding cushions your body while maintaining air flow and dispersing pressure, thus neutralizing fatigue and preserving your performance.



03 ARROWGRIP® SLIP-RESISTANT PLATE

An angular dorsal plate is carefully designed to keep your harness's D-ring secure in its proper position even under the weight of Class 2 SRL-Ps.




04 EXTRA LANYARD KEEPERS

The FT-1910 comes with four lanyard keepers: One pair along your chest, and another on each side of your torso to keep lanyards secured and out of the way.



05 COMFORT LEGS™

In a first for the segment, the FT-1910 features lateral leg straps that give workers maximum mobility and pinch-free movement.

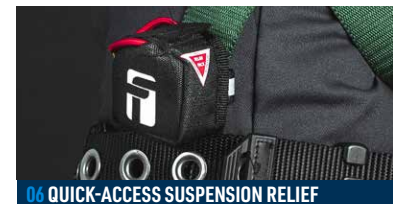

06 QUICK-ACCESS SUSPENSION RELIEF

Each harness comes with suspension trauma relief packs that can help prevent life-threatening secondary injuries while awaiting rescue.



07 STAINLESS STEEL GROMMETS

Tongue-buckle versions have stainless steel grommets for superior corrosion-resistance in moist environments.



The FallTech FT-1910 comes in a wide variety of options to meet the diverse individual needs of professionals across general industry. Whichever option you choose, rest assured your FT-1910 has been crafted and tested to highest safety and performance standards.



MATERIAL SPECIFICATIONS	
Webbing	Polyester (5,000 lbs. Min. Strength)
D-Ring	Aluminum Alloy (5,000 lbs. Min. Strength)
Adjusters	Aluminum Alloy (3,372 lbs. Min. Strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lbs. Min. Strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lbs. Min. Strength)

RELEVANT STANDARDS	
ANSI	Z359.11-2021
OSHA	1926.502, 1910.140

PERFORMANCE SPECIFICATIONS	
Static Strength	3,600 lbs. Minimum
ANSI User Capacity	One User up to 310 lbs. Max
OSHA User Capacity	Allowable up to 425 lbs. Max

1 D-RING CLIMBING NON-BELTED		
PART #	Size	Leg Closure
1910XS	Extra Small	Tounge Buckle
1910SM	Small / Medium	
1910LX	Large / Extra Large	
19102X3X	2X/ 3X Large	
1910QCXS	Extra Small	Quick Connect
1910QCSM	Small / Medium	
1910QCLX	Large / Extra Large	
1910QC2X3X	2X /3X Large	



MATERIAL SPECIFICATIONS	
Webbing	Polyester (5,000 lbs. Min. Strength)
D-Ring	Aluminum Alloy (5,000 lbs. Min. Strength)
Adjusters	Aluminum Alloy (3,372 lbs. Min. Strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lbs. Min. Strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lbs. Min. Strength)

RELEVANT STANDARDS	
ANSI	Z359.11-2021
OSHA	1926.502, 1910.140

PERFORMANCE SPECIFICATIONS	
Static Strength	3,600 lbs. Minimum
ANSI User Capacity	One User up to 310 lbs. Max
OSHA User Capacity	Allowable up to 425 lbs. Max

2 D-RING CLIMBING NON-BELTED		
PART #	Size	Leg Closure
1910FDXS	Extra Small	Tounge Buckle
1910FDSM	Small / Medium	
1910FDLX	Large / Extra Large	
1910FD2X3X	2X/ 3X Large	
1910FDQCXS	Extra Small	Quick Connect
1910FDQCXM	Small / Medium	
1910FD0QCLX	Large / Extra Large	
1910FDQC2X3X	2X /3X Large	



MATERIAL SPECIFICATIONS	
Webbing	Polyester (5,000 lbs. Min. Strength)
D-Ring	Aluminum Alloy (5,000 lbs. Min. Strength)
Adjusters	Aluminum Alloy (3,372 lbs. Min. Strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lbs. Min. Strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lbs. Min. Strength)

RELEVANT STANDARDS	
ANSI	Z359.11-2021
OSHA	1926.502, 1910.140

PERFORMANCE SPECIFICATIONS	
Static Strength	3,600 lbs. Minimum
ANSI User Capacity	One User up to 310 lbs. Max
OSHA User Capacity	Allowable up to 425 lbs. Max

3 D-RING STANDARD NON-BELTED		
PART #	Size	Leg Closure
19103DXS	Extra Small	Tounge Buckle
19103DSM	Small / Medium	
19103DLX	Large / Extra Large	
19103D2X3X	2X/ 3X Large	
19103DQCXS	Extra Small	Quick Connect
19103DQCXM	Small / Medium	
19103D0QCLX	Large / Extra Large	
19103DQC2X3X	2X /3X Large	



MATERIAL SPECIFICATIONS	
Webbing	Polyester (5,000 lbs. Min. Strength)
D-Ring	Aluminum Alloy (5,000 lbs. Min. Strength)
Adjusters	Aluminum Alloy (3,372 lbs. Min. Strength)
Tongue Buckles	Plated Alloy Steel and Stainless Steel (3,372 lbs. Min. Strength)
Quick Connect Buckles	Plated Alloy Steel (3,372 lbs. Min. Strength)

RELEVANT STANDARDS	
ANSI	Z359.11-2021
OSHA	1926.502, 1910.140

PERFORMANCE SPECIFICATIONS	
Static Strength	3,600 lbs. Minimum
ANSI User Capacity	One User up to 310 lbs. Max
OSHA User Capacity	Allowable up to 425 lbs. Max

4 D-RING CLIMBING NON-BELTED		
PART #	Size	Leg Closure
19104DXS	Extra Small	Tounge Buckle
19104DSM	Small / Medium	
19104DLX	Large / Extra Large	
19104D2X3X	2X/ 3X Large	
19104DQCXS	Extra Small	Quick Connect
19104DQCXM	Small / Medium	
19104D0QCLX	Large / Extra Large	
19104DQC2X3X	2X /3X Large	

Find Our Full Selection of Fall Protection Products at FallTech.com



©2024 Alexander Andrew, Inc
1306 S. Alameda St.
Compton, CA. 90221-4803

Tel / 323.752.0066

Fax / 323.752.5613

Tools shown not included.

Product description and specifications
herein may change without notice.

U.S. and International Patents Pending.

