


Grade 43 Chain Positioning Lanyards

The FallTech® Grade 43 Chain Positioning Lanyards are designed for great durability and compliance at an affordable price. Ideal for positioning or restraint applications when used in conjunction with a full body harness with side or hip D-rings. Available with or without swivel rebar hook to best meet your jobsite needs.

- High-strength welded link Grade 43 chain provides durability
- ANSI Z359.12 compliant snaphooks for simple and familiar harness connection
- ANSI Z359.12 compliant transverse-load rated swivel rebar hook provides tangle-resistant connection to vertical member
- Also available with ANSI Z359.12 Part No. 8252LT compliant transverse-load rated non-swivel rebar hook if preferred
- Zinc plated alloy steel quick-link connectors are mechanically fastened for extra security
- For use in work positioning applications



8252

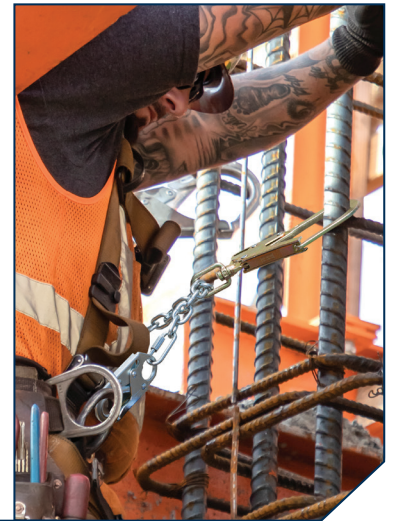

Material Specifications

Chain	Grade 43 Welded Link Steel Min. 5,000 lbs. Tensile Strength
Snaphooks	Zinc Plated Alloy Steel Min. 5,000 lbs. Tensile Strength with 3,600 lbs. Gate Strength
Rebar Hook	Zinc Plated Alloy Steel Min. 5,000 lbs. Tensile Strength with 3,600 lbs. Gate Strength
Quick Link Connectors	Zinc Plated Alloy Steel Min. 5,000 lbs. Tensile Strength

Performance Specifications

Static Strength	5,000 lbs. Minimum
ANSI User Capacity	One User up to 310 lbs. Max.
OSHA User Capacity	Allowable up to 425 lbs. Max.

Relevant Standards

ANSI	Z359.3-2019
OSHA	1910.66, 1926.502

Grade 43 Chain Positioning Lanyards

Part No.	Length
8252LT (non-swivel)	21"
8252 (swivel)	23"