

# LEADING EDGE<sup>®</sup> LANYARD


## Foot-Level Tie-Off for Leading Edge Applications

For applications where leading and sharp edge hazards are present and the only anchorage connection is at foot-level, a FallTech Leading Edge Lanyard is the right equipment for the job – Leading Edge fall protection compliance with the compact size of a lanyard.

Designed for sharp and leading edge falls, the FallTech leading edge lanyards are constructed with highly durable materials for foot-level tie-off for a maximum 12' free fall.

The lightweight design allows for freedom of movement, will not pull on your back, and are able to be connected to most FallTech Trailing I-Beam Anchors, providing increased safety and productivity.

- ¼" heavy duty abrasion and cut resistant steel cable for long life.
- Red protective PVC coated cover on the cable provides easy identification of a Leading Edge lanyard.
- Foot-level anchorage for a 12' maximum free fall.
- 12' free fall energy absorber with maximum arrest forces to 1,800 lbs. with average arrest forces below 1,350 lbs. in the event of a fall.
- Protective patented WrapPack cover protects the energy absorber and labels from harsh environmental conditions and day-to-day use and offers a protected window to allow visual inspection of the internal webbing.
- Single-leg and twin-leg options are available with a combination of steel or aluminum rebar hooks and snap hooks.
- Complies with the following ANSI and OSHA requirements:
  - ANSI: Z359.13-2013
  - OSHA: 1926.502, 1910.66.

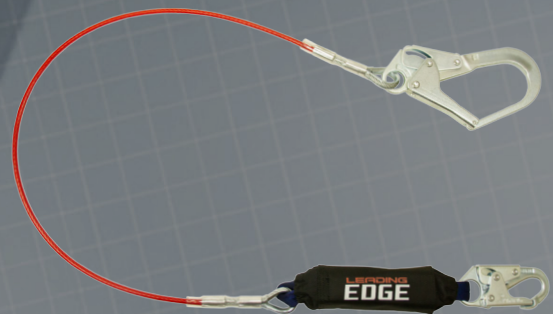


8354LE3



8354LEY3

## Leading Edge Lanyards

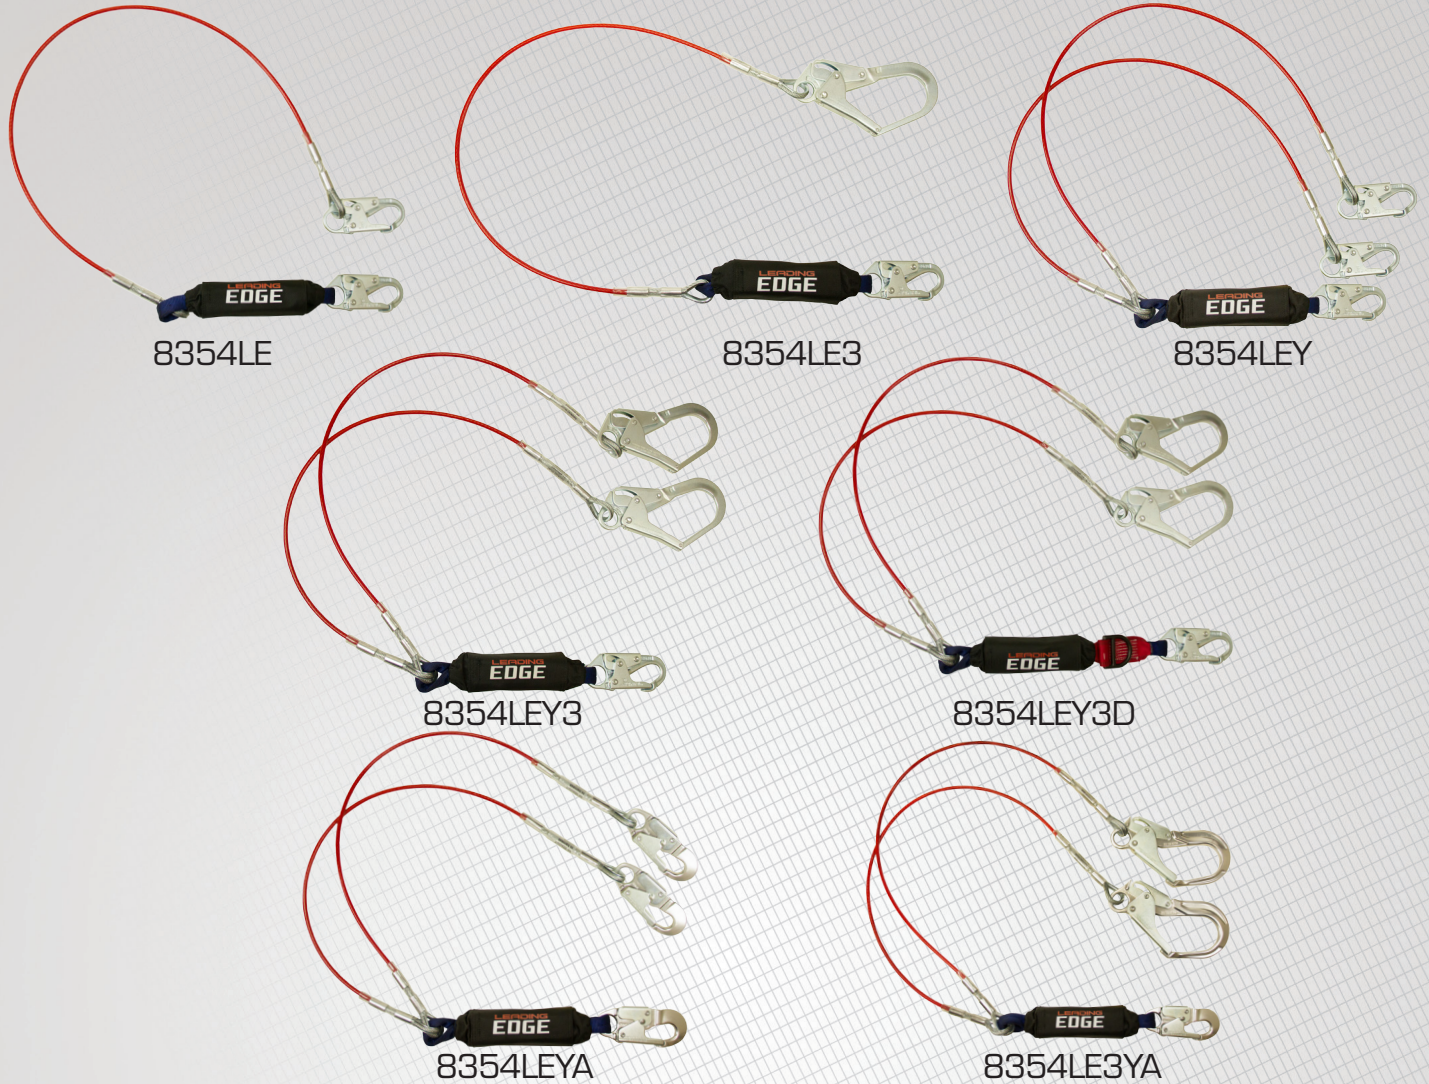

Part #	Description	Length	Connector Material
<b>8354LE</b>	Single leg with Snap Hooks	6'	Plated Alloy Steel
<b>8354LE3</b>	Single leg with one Snap Hook and one Rebar Hook		
<b>8354LEY</b>	Y-Leg for 100% tie-off with Snap Hooks		
<b>8354LEY3</b>	Y-Leg for 100% tie-off with one Snap Hook and two Rebar Hooks		
<b>8354LEY3D</b>	Y-Leg for 100% tie-off with one Snap Hook and two Rebar Hooks with D-ring for SRD attachment		
<b>8354LEYA</b>	Y-Leg for 100% tie-off with Snap Hooks		Forged Aluminum Alloy
<b>8354LEY3A</b>	Y-Leg for 100% tie-off with one Snap Hook and two Rebar Hooks		

MATERIALS SPECIFICATIONS	
<b>¼" Galvanized Steel Cable</b>	5,000 lbs.
<b>Connectors:</b>	5,000 lbs. Minimum with 3,600 lbs. Gate Strength
<b>D-ring:</b>	5,000 lbs.

PERFORMANCE SPECIFICATIONS	
<b>Minimum Static Strength:</b>	5,000 lbs.
<b>ANSI Lanyard Class</b>	12' Free Fall
<b>Maximum Arrest Distance:</b>	60"
<b>Average Arrest Force:</b>	1,350 lbs.
<b>Maximum Arrest Force:</b>	1,800 lbs.