



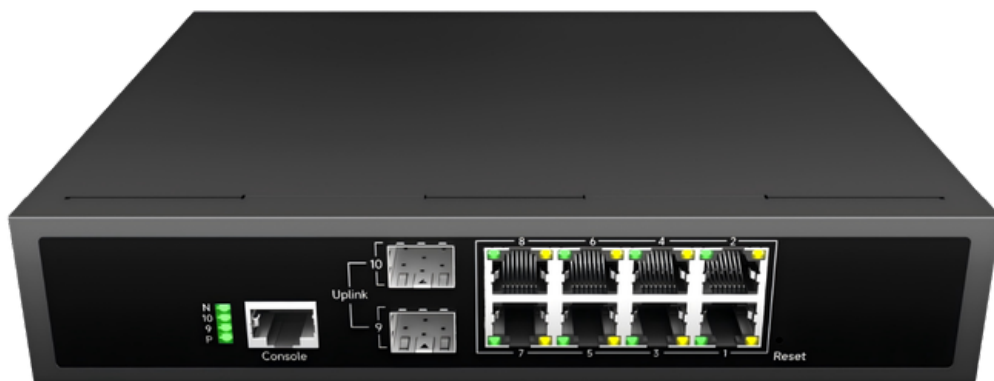

WolfPack 8-Port POE Ethernet Switch

PART NUMBER: HDTV-IPM-10000SW-08P

DESCRIPTION

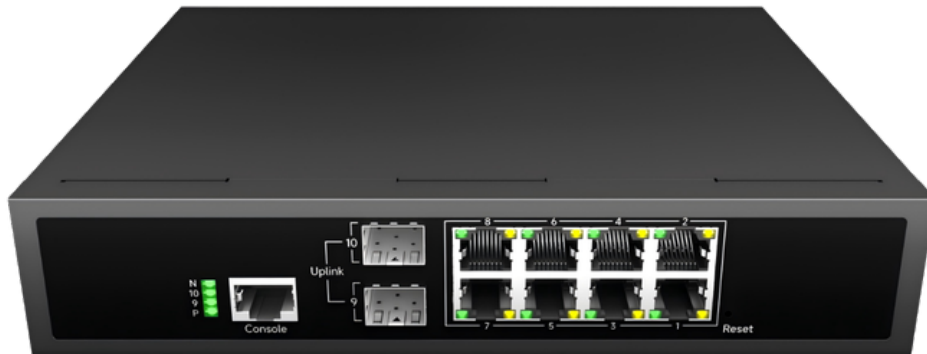

Input Voltage: AC 100-240V 50/60Hz
Operating Temperature: -10°C ~ +50°C
Heat Dissipation: Fan cooling
Certification: CCC/CE/FCC/RoHS
ESD: 8KV-15KV
MTBF: 100000H

The HDTV-IPM-10000SW-08P 10-Port Managed PoE+ Ethernet Switch is equipped with 8x 10/100/1000BASE-T ports, 2x 1000M SFP Uplinks. 8x RJ45 Ports support both IEEE 802.3af PoE and IEEE 802.3at PoE+(up to 30W per Port) for powering attached IP phones, wireless access points, or other standards compliant PoE and PoE+ end network devices. The switch adopts the most cutting-edge Realtek chip. This access switch delivers a compact, cost-effective solution for carrier IP MAN and enterprise networks. Based on the high-performance hardware and management platform, it supports function such as ACL, QinQ and QoS. It's simple management mode and flexible installation can meet the requirement of any scenario.

PRODUCT PARAMETERS

Provider Mode Ports

Port type and quantity:	8 x 10/100/1000 Base-T+ 2x1000Base-X
Management Port	Support console
Power Supply	100-240V/AC
LED Indicators	PWR, Link/ACT LED

Network Size – length of cable

Twisted pair (TP):	0-100m (CAT5e,CAT6)
Single mode Fiber (SMF):	20/40/60/80/100KM
Multimode Fober (MMF):	550m

Network Topology

Ring topology	Support
Star topology	Support
Bus topology	Support
Tree Topology	Support
Hybrid topology	Support

Electrical Specifications

Input voltage	AC 100-240V 50/60Hz
Power consumption:	<120W
Main board power	<10W

PoE Support

PoE port	1-8
PoE Protocol	802.3af, 802.3at
Pin Assignment	1,2+; 3,6-
PoE Management	Support

Layer 2 Switching

Switching capacity	20Gbps
Packet forwarding rate	14.88Mpps
MAC address table	8K
Buffer	4.1M
Forwarding delay	<10us
MDX/MIDX	Support
VLAN	256
GVRP VLAN	Support
Protocol VLAN	Support
Voice VLAN	Support
Surveillance VLAN	Support
MAC VLAN	Support
Ether channel/ 802 .3ad	Support
LACP	Support
Interface Speed	Support

Duplex Mode	Support
Flow Control	Support
Jumbo frame	Support
DHCP Client	Support
SNTP Client	Support
Port Statistics	Support
Protected Ports	Support
EEE	Support
Ethernet Ring Protection Switching	Support
LLDP	Support
LLDP 802.1 TLV	Support
MSTP / RSTP / STP	Support
STP BPDU Filter	Support
STP BPDU guard	Support
STP Port Fast	Support
IGMP Snooping	Support
MLD Snooping	Support
MVR	Support

Layer 3 Route	
IPV4 management	Support
IPV6 management	Support
Static Routes IPv4	32
Static Routes IPv6	32
ARP	Support
Loopback Interface	Support
DHCP Server	Support
DNS Server	Support
DNS Client	Support

Convergence

ACL	Support MAC Standard/Extended ACL Support IPV4 Standard/Extended ACL Support IPV6 Standard/Extended ACL
QoS	Support QoS Remarking Support Port Trust Support Port bandwidth Support egress queuing bandwidth Support SP, WRR Support COS, DSCP, IP Priority

Management

User Management	Support
System Log	Support
Upgrade Firmware	Support
Configuration File Download/Upload	Support
SNMP	Support SNMP V1/V2/V3
WEB	Support
Console	Support
CLI	Support
Telnet/SSH	Support
RMON	Support

Security

Management channel configuration	Support
AAA	Support
802.1X	Support
MAC-Based	Support
WEB-Based	Support
DoS	Support
ARP	Support
DHCP Snooping	Support
IP Source Guard	Support

Port Security	Support
Protected Ports	Support
Storm control	Support

Equipment diagnosis	
Console log	Support
RMA log	Support
Flash log	Support
Port mirroring	Support 1:1 or 1:M
Ping	Support
Traceroute	Support
Copper port test	Support
SFP transceiver information	Support
UDLD protocol	Support

Environment	
Operate temperature	-10°C to 50°C
Storage temperature	-40°C to 85°C
Relative humidity	10% to 90% RH
Heat Dissipation Method	Fanless, natural cooling
MTBF	100, 000H

Mechanical Dimensions	
Dimensions (WxHxD):	220*161*44mm
Mounting	Desktop
Weight	1kg

EMC & INGRESS PROTECTION	
Surge protection of Power	Common mode 6KV; differential mode: 4KV
Surge protection of Ethernet	Common mode 6KV; differential mode: 4KV
Electrostatic discharge (ESD)	8 kV contact discharge, 15 kV air discharge
Free fall	0.5m

EMC & INGRESS PROTECTION	
Surge protection of Power	Device, Power cord, User manual

SIZE AND APPEARANCE



Back view





HDTV Supply, Inc

Inquiries and Aftersales Support

For any inquiries or assistance related to this product, including aftersales service, please contact our customer support team. We are committed to providing you with the highest level of service.

Contact Details:

- Phone: 833-WOLFPACK (833-965-3722)
- Email: customerservice@hdtvsupply.com | support@hdtvsupply.com
- Website: www.hdtvsupply.com

Our team is ready to assist with any questions or concerns you may have.