



**AMERICAN SPECIALTIES, INC.**


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 0462-AD

ISSUED: 1-87

REVISED: 9-04

**RECESSED PAPER TOWEL DISPENSER AND WASTE RECEPTACLE**

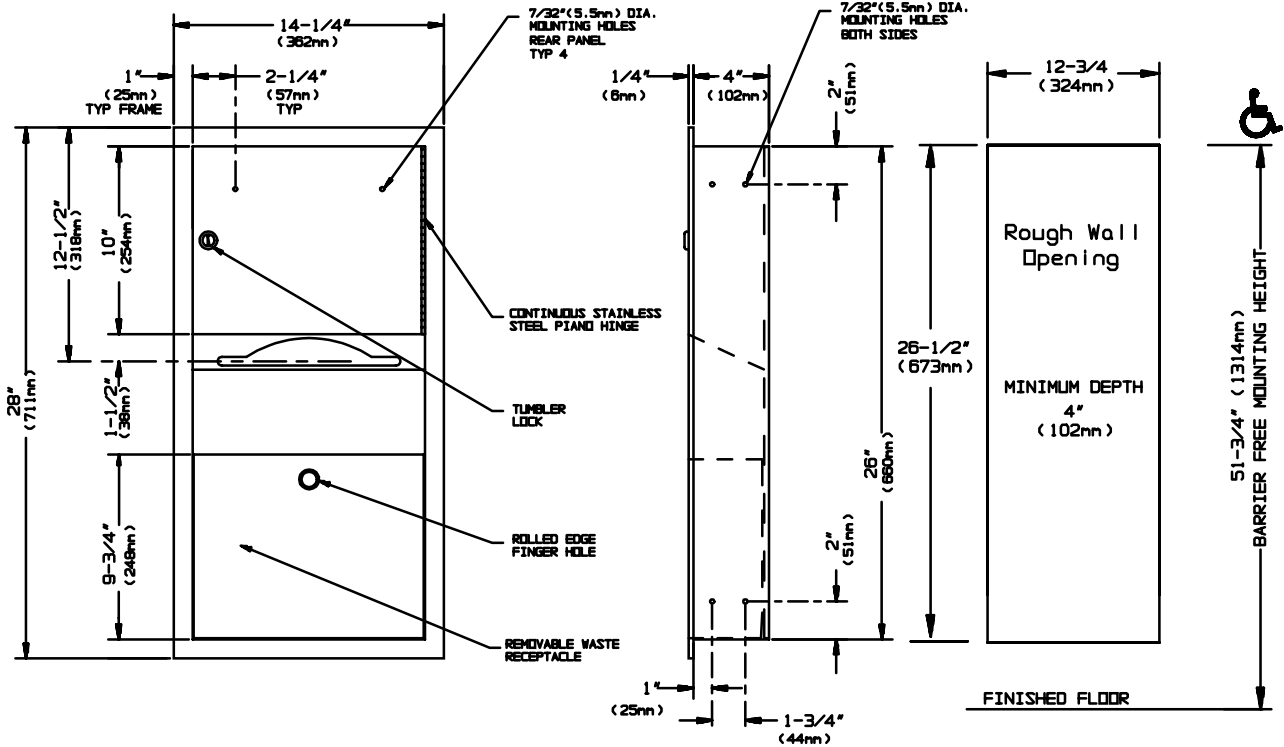

**SPECIFICATION**

Recessed Paper Towel Dispenser and Waste Receptacle shall hold and dispense 475 standard multi-fold or (350) standard C-fold paper towels and shall have a waste capacity of 2 gal. (7.6 liters). Door and cabinet shall be fabricated of alloy 18-8 stainless steel, type 304, 22 gauge; all exposed surfaces shall have N<sup>o</sup>4 satin finish and be protected during shipment with a PVC film that shall be easily removable after installation. Door shall be of double-pan construction with fiberboard filler and shall be attached to cabinet at side with a full length 3/16" dia. stainless steel multi-staked piano hinge and shall be held closed with a tumbler lock keyed alike to other ASI washroom equipment. Towel dispensing slot shall have a fully deburred edge for snag-free dispensing and user safety. Waste receptacle shall have hemmed edges and a rolled-edge finger-hole for ease of service removal and maintenance safety. Structural assembly of body and door components shall be of welded construction.

**Recessed Paper Towel Dispenser and Waste Receptacle shall be Model N<sup>o</sup> 0462-AD as manufactured by American Specialties, Inc., 441 Saw Mill River Road Yonkers, New York 10701-4913**

**INSTALLATION**

Unit is recessed mounted in wall using N<sup>o</sup> 10 self tapping screws (by others) through concealed mounting holes provided. Note that top of rough wall opening is 3/4" (19mm) below top of unit.

**Rough Wall Opening required is..... 12-3/4"W x 26-1/2"H x 4"D. minimum (324mm x 673mm x 102mm).**

**OPERATION**

Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly. Waste container is emptied manually on cycle determined by maintenance needs.