



AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: **104**

ISSUED: 1-87

REVISED: 9-04

SECURITY FRAMED MIRROR WITH ROUNDED CORNERS

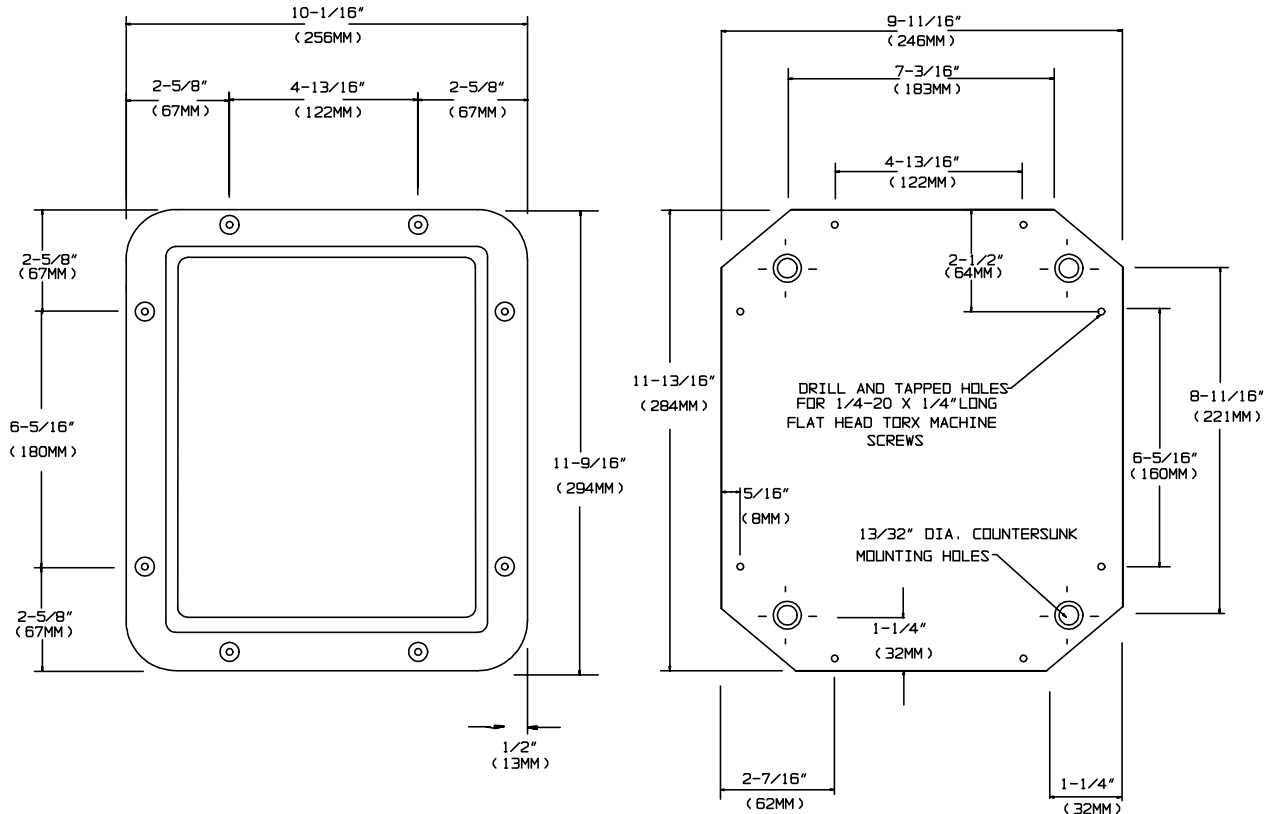

ELEVATION

WALL ANCHOR PLATE

SPECIFICATION

Security Framed Mirror with Rounded Corners for wall anchor plate mounting shall be fabricated of one piece formed alloy 18-8 stainless steel, type 304, 18 gauge with N^o 8 mirror polish. Installed unit shall project 7/16" (11mm) from wall. Frame shall be provided with eight (8) dimpled holes for 1/4 - 20 x 3/8" long pin-Torx[®] flat head machine screws (supplied). Wall anchor plate shall be fabricated of steel, 7 gauge and shall be provided with four (4) 13/32" (10mm) dia. countersunk mounting holes for 1/4-20 x 2"F.H. screws (supplied).

Security Framed Mirror with Rounded Corners shall be Model N^o 104 as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

For Compliance with ADA Accessibility Guidelines, install unit so that bottom edge of reflecting surface is 40" (1016mm) maximum above finished floor. Surface mount wall anchor plate with four (4) screws (supplied) through countersunk mounting holes provided. Mount and secure framed mirror to wall anchor plate with eight (8) 1/4 - 20 x 3/8" long pin-Torx[®] flat head screws (supplied) through dimpled holes in frame into tapped holes provided in wall plate.

GLAZING OPTION

For 20 gauge N^o 8 mirror polish finish specify option by adding suffix to Model N^o (e.g. 104-14).