




AMERICAN SPECIALTIES, INC.
441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No:	145
ISSUED:	2-87
REVISED:	9-96

SURFACE MOUNTED SOAP DISH

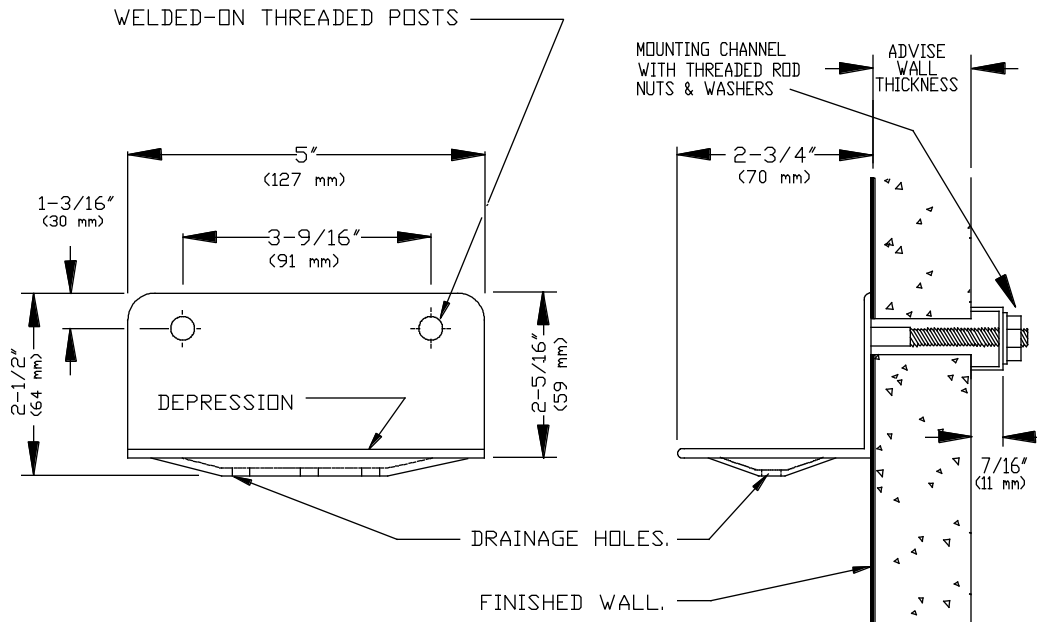

ELEVATION

TYPICAL INSTALLATION

SPECIFICATION

Surface Mounted Soap Dish (Rear Mounted) shall be fabricated of 18-8 alloy stainless steel, type 304, N^o11 gauge. All exposed surfaces shall have N^o4 satin finish. Soap dish shall be provided with three (3) drain holes. Rear of unit shall have two (2) welded-on 1/4" - 20 internally threaded posts. Two (2) 1/4"-20 threaded zinc-plated steel rods with length specified at time of order to suit wall thickness shall be supplied with two (2) each washers and nuts for mounting. Back plate shall be fabricated of N^o 11 gauge die-formed galvanized steel and be reversible for shallow or deep wall installation.

Surface Mounted Soap Dish (Rear Mounted) shall be Model N^o 145 as fabricated by American Specialties Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

For compliance with ADA Accessibility Guidelines, install unit so that soap dish is 48" (1219mm) maximum above finished floor (AFF) in showers or 36" (914mm) maximum AFF in bathtubs or 46" (1168mm) maximum AFF if side reach over an obstruction (e.g. vanity) is only provided or 44" (1118mm) maximum AFF if forward reach over vanity basin is provided. Surface mount unit to finished wall and secure with washers and nuts (supplied). The length of the threaded rods is determine by the thickness of the wall on which the unit is mounted. Specify the thickness of the wall in the following increments (e.g. 145-68).

Wall Thickness

Up to 6" (152mm)
6" to 8" (152mm to 203mm)
Over 8" (203mm), specify thickness: _____

Suffix

LT6
68
GT8=xxx

OPERATION

Soap is stored on the dish where three (3) holes are provided to allow water to drain away.