


Submittal Sheet

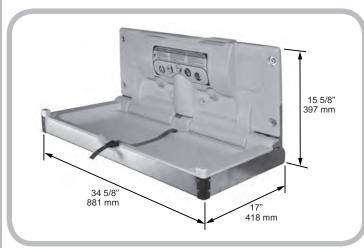

Recommended Blocking

Top

•

Model 5410339 Horizontal **Diaper Changing Station**

- Polyethylene body with stainless steel exterior.
- Easy to clean, high-density polyethylene which is naturally bacteria resistant; beneath 304 brushed stainless steel encasement.
- Standard with molded-in dual liner dispensers.
- Each liner dispenser holds approximately 50 of the 036-LCR or 036-NWL liners.
- A.D.A. cam-buckle is adjustable with one hand.
- Smooth nylon safety belt is easily cleaned and does not harbor bacteria.
- Convenient bag hooks clearly labeled on both sides.
- Easy to read ANSI compliant labels (ANSI Z535.3 and ANŚI Z535.4), utilizing universal safety symbols.
- Compact, slim profile meets A.D.A. Only protrudes 4 inches or 102 mm from wall.
- Includes universal changing station door sign.
- Pneumatic gas shock mechanism to ensure smooth, safe open and close motions.
- Steel-to-steel support hinges.
- Includes easy to install, step-by-step instructions plus all mounting hardware.
- ASTM G21 Anti-Bacterial: No measurable bacterial growth.
- ASTM G22 Anti-Fungal: No measurable fungal growth.
- Meets or exceeds ASTM F2285 Safety Specifications for Commercial Changing Stations.
- Standard pack: 1 unit.
- Limited Warranty: This product is warranted against manufacturing defects for a period of 5 years.

Short Specifications

Polyethylene Diaper Changing Stations with Stainless Steel Exterior:

- 1. Acceptable product: Foundations Worldwide, Inc.; Model 5410339
- 2. Characteristics:

For A. D. A Compliance 45" (114 cm)

A. F. F

- a. Type: Molded FDA approved high-density polyethylene (HDPE) body.
 b. Child protection strap featuring cam-buckle
- which is adjustable with one hand.
- Smooth nylon safety belt is easily cleaned.
- d. Warning labels printed in English, Spanish and French.
- Meets ASTM F2285 requirements for weight bearing Commercial Changing Stations.
- Entire body 18 guage, 304 brushed stainless steel.

3. A.D.A. Compliance:



- **Knee Clearance** 306.3
- Maximum Protruding Objects 307.2
- 308.2 Forward Reach
- 308.3 Side Reach
- Operation 309.4
- Work Surface 902.3
- Compliant when properly installed.
- ANSI compliant safety labels.
- 5. CPSIA compliant to applicable sections.

Installation Information

- Closed unit projects less than 4 inches (101 mm) from wall.
- Open changing surface projects 17 inches (445 mm) from wall during use.
- Overall closed dimensions are 34-5/8 inches (870 mm) wide and 17 inches (390 mm) tall.
- Hardware allows for mounting to current or new construction applications.

SD20001B

