



**AMERICAN SPECIALTIES, INC.**


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000  
www.americanspecialties.com

MODEL No: 6462-9

ISSUED: 1-87

REVISED: 2-06

**SURFACE MOUNTED PAPER TOWEL DISPENSER AND WASTE RECEPTACLE**

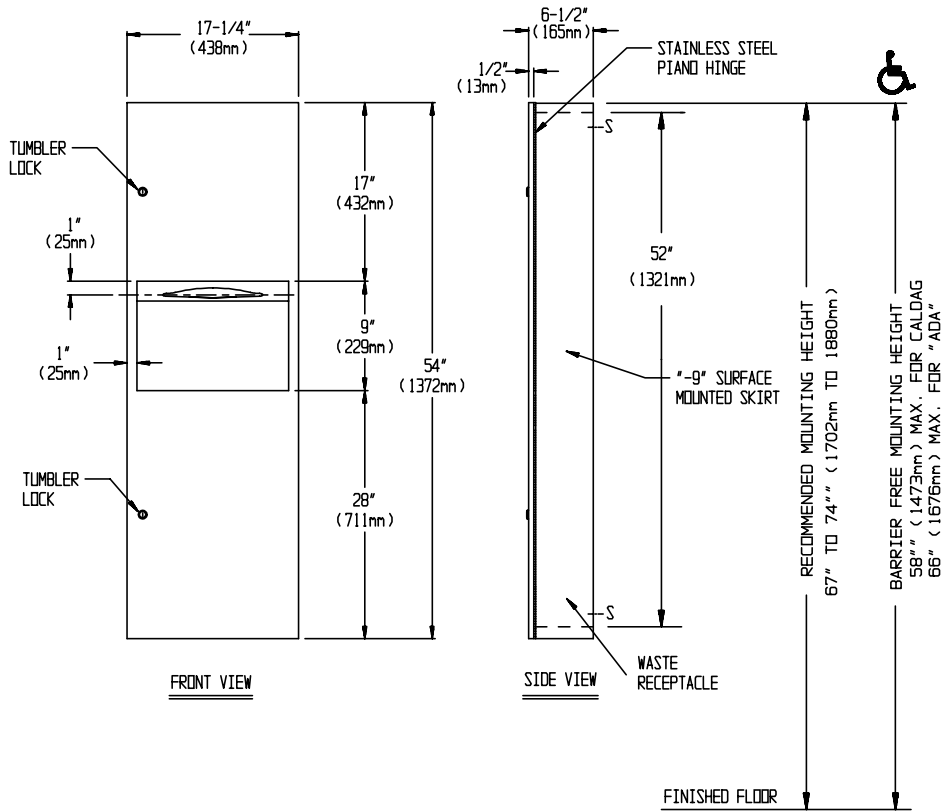

**SPECIFICATION**

Surface Mounted Paper Towel Dispenser and Waste Receptacle shall hold and dispense 800 standard multi-fold or 600 standard C-fold or 1100 standard single-fold paper towels, and shall have a waste capacity of 9 gal. (34 liters). Unit shall be supplied with a SM collar (skirt) to convert to surface mounting. Door, cabinet, dispenser and waste receptacle shall be fabricated of stainless steel, alloy 18-8 type 304. All exposed surfaces shall have a N° 4 satin finish, and shall be protected during shipment with PVC plastic film easily removable after installation. Full-face door shall be 18 gauge, fabricated from one piece, with no miters, welding or open seams on face and have a 1/2" (13mm) square return to the extension SM collar. Cabinet shall be 20 gauge with a 1" (25mm) wide perimeter trim to lay flush against collar. Door shall be attached to the cabinet body with a full length 3/16" diameter (Ø4.8mm) stainless steel multi-staked piano hinge and shall be held closed with two (2) tumbler locks keyed alike to other ASI washroom equipment. Towel dispensing slot shall have a fully deburred edge for snag free dispensing and user safety. Adjustable guide shall be provided to allow dispensing of single-fold, multi-fold or C-fold paper towels. Waste receptacle shall have a rolled edge finger hole for easy servicing and removal. Structural assembly of body and door components shall be of welded construction.

**Surface Mounted Paper Towel Dispenser and Waste Receptacle shall be Model N° 6462-9 as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913**

**INSTALLATION**

Mount unit on wall with N° 10 self-tapping screws (by others) through concealed mounting holes provided in cabinet back. For compliance with ICC/ANSI A-117.1-2003 and ADA Accessibility Guidelines install unit with centerline of towel dispenser slot 48" (1219mm) maximum above finished floor (MAX AFF) only if clear floor forward reach or side reach access is provided. Be advised that local codes may require mounting centerline of towel dispenser slot 40" (1016mm) MAX AFF e.g. California UBC/Title 24. For general utility install unit with centerline of towel dispenser slot between 49" and 56" (1245mm to 1422mm) AFF. SM collar is installed on cabinet prior to mounting on wall following procedure described on SM Collar Tech Data Sheet.

**OPERATION**

Towels are self-feeding until supply is depleted. Unit will continue to feed properly when reloaded with a partial load in place. Waste receptacle is emptied manually on a cycle determined by maintenance needs. Locked door prevents unauthorized access or removal.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.