



**AMERICAN SPECIALTIES, INC.**


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 6477

ISSUED: 1-87

REVISED: 11-04

RECESSED TOILET SEAT COVER DISPENSER

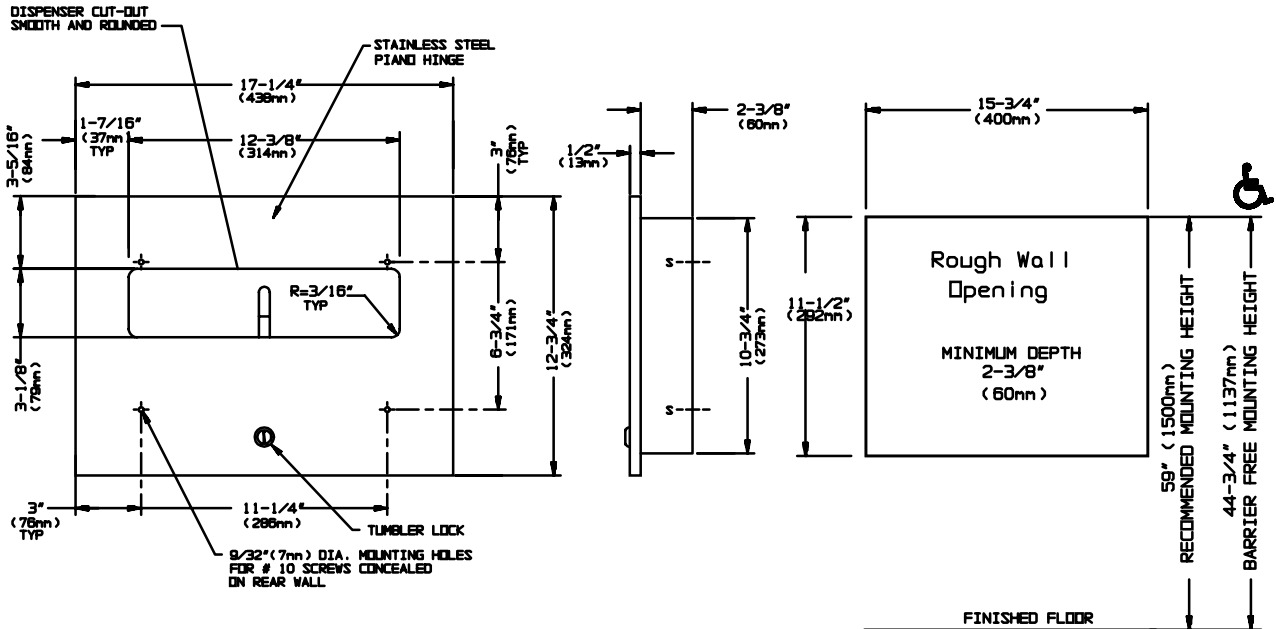

**SPECIFICATION**

Recessed Toilet Seat Cover Dispenser shall hold and dispense 500 standard single or half-fold paper toilet seat covers contained in supply box and shall have cabinet, frame and door fabricated of alloy 18-8 stainless steel, type 304. Cabinet shall be N°20 gauge with a 1" (25mm) wide perimeter return to lay flat against wall or partition. Door shall be fabricated of 18 gauge with a 1/2" (13mm) square return to wall with no open seams visible on door face. Door shall be attached to top of cabinet with a full length 3/16" (5mm) dia. stainless steel multi-staked piano hinge and shall be held closed with a tumbler lock keyed alike to other ASI washroom equipment. All exposed surfaces shall be N°4 satin finish and shall be protected during shipment with a PVC film easily removable after installation. Cover dispensing slot shall have a fully deburred flat edge for snag-free dispensing and user safety. Structural assembly of cabinet and door components shall be of welded construction and shall have no exposed fasteners or welded seams.

**Recessed Toilet Seat Cover Dispenser shall be Model N° 6477 as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913**

**INSTALLATION**

Unit is mounted in wall recess using N° 10 self tapping screws (by others). Mounting holes are provided in side and rear walls of cabinet and are accessible through door for installation. Note that top of dispenser slot is 2-1/2" (64mm) below top of rough wall opening.

**Rough Wall Opening required is.... 15-3/4"W x 11-1/2"H x 2-1/2"D. (400mm x 292mm x 64mm).**

**OPERATION**

Covers are self-feeding until supply is depleted. Unit is manually reloaded with a full box through access door on schedule determined by maintenance requirements.