




Hygienic Solutions at Work

Ready to Ship Stock Series Grab Bars, Stainless Steel

Code 1001NP 18":	1-1/2" dia. Stainless steel, peened finish
Code 1001NP 24":	1-1/2" dia. Stainless steel, peened finish
Code 1001NP 30":	1-1/2" dia. Stainless steel, peened finish
Code 1001NP 36":	1-1/2" dia. Stainless steel, peened finish
Code 1001NP 48":	1-1/2" dia. Stainless steel, peened finish

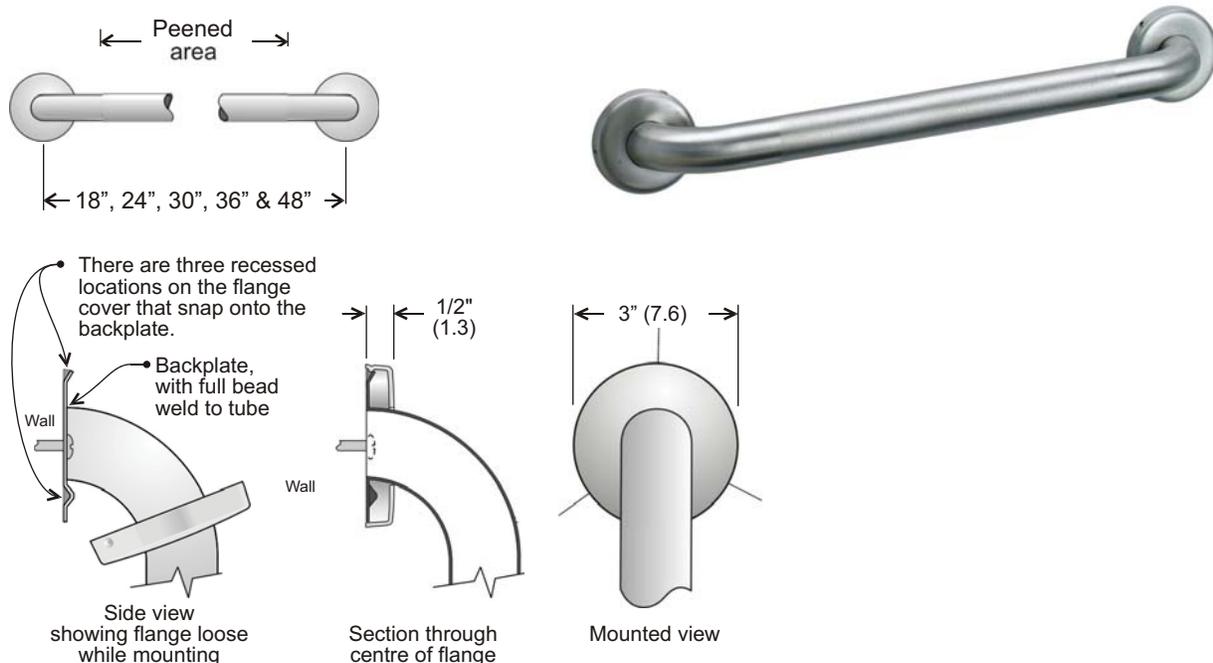

Concealed mounting screws, using snap flange, on "SP & NP" codes

Specifications:

The Frost NP series stock grab bars are of an all stainless steel construction.

The brushed and peened finish make this an attractive, cost effective product to specify for any Installation.

Stamped flange is 12 gauge stainless steel with a full 360 degree bead weld to the 18 gauge stainless steel tubing.

Features concealed mounting detailing as shown in the illustration above.

Barrier Free Access:

The Frost NP grab bar series comply with handicap codes requiring 1-1/2" bar diameter and wall clearance of 1-1/2".

Barrier free access specifications may vary depending on jurisdiction.


Safety Warning: All grab bars must be installed by qualified trades persons. Installers must consult and comply with local building codes. Mounting hardware and other systems to be determined by contractor and installer pending specific structure, design, and conditions. All installations must be fully inspected and approved by property owners and maintenance personnel prior to product being put into use. Failure to comply to proper installation procedure will void warranty and may result in malfunctioning or injury.



Hygienic Solutions at Work

Ready to Ship Stock Series Grab Bars, Stainless Steel

Code 1003NP 30x30": 1-1/2" dia. Stainless steel, peened finish

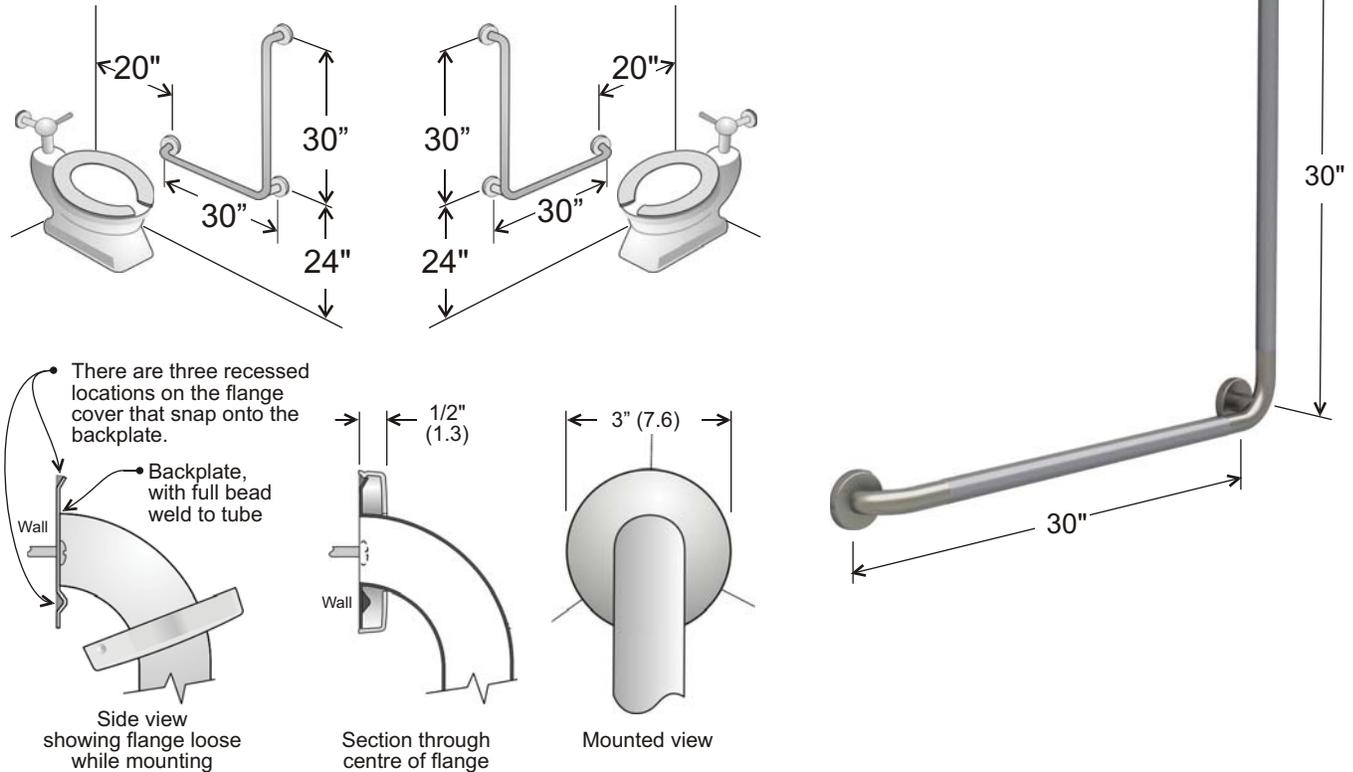

Concealed mounting screws, using snap flange, on "SP & NP" codes

Specifications:

The Frost NP series stock grab bars are of an all stainless steel construction.

The brushed and peened finish make this an attractive, cost effective product to specify for any Installation.

Stamped flange is 12 gauge stainless steel with a full 360 degree bead weld to the 18 gauge stainless steel tubing.

Features concealed mounting detailing as shown in the illustration above.

Barrier Free Access:

The Frost NP grab bar series comply with handicap codes requiring 1-1/2" bar diameter and wall clearance of 1-1/2".

Barrier free access specifications may vary depending on jurisdiction.

Safety Warning: All grab bars must be installed by qualified trades persons. Installers must consult and comply with local building codes. Mounting hardware and other systems to be determined by contractor and installer pending specific structure, design, and conditions. All installations must be fully inspected and approved by property owners and maintenance personnel prior to product being put into use. Failure to comply to proper installation procedure will void warranty and may result in malfunctioning or injury.



- Quality
- Value
- Service

**Tech
Reference**


Hygienic Solutions at Work

Robe Hook

Code 1138S: Single/Stainless

Code 1139S: Double/Stainless

[Download
PDF](#)

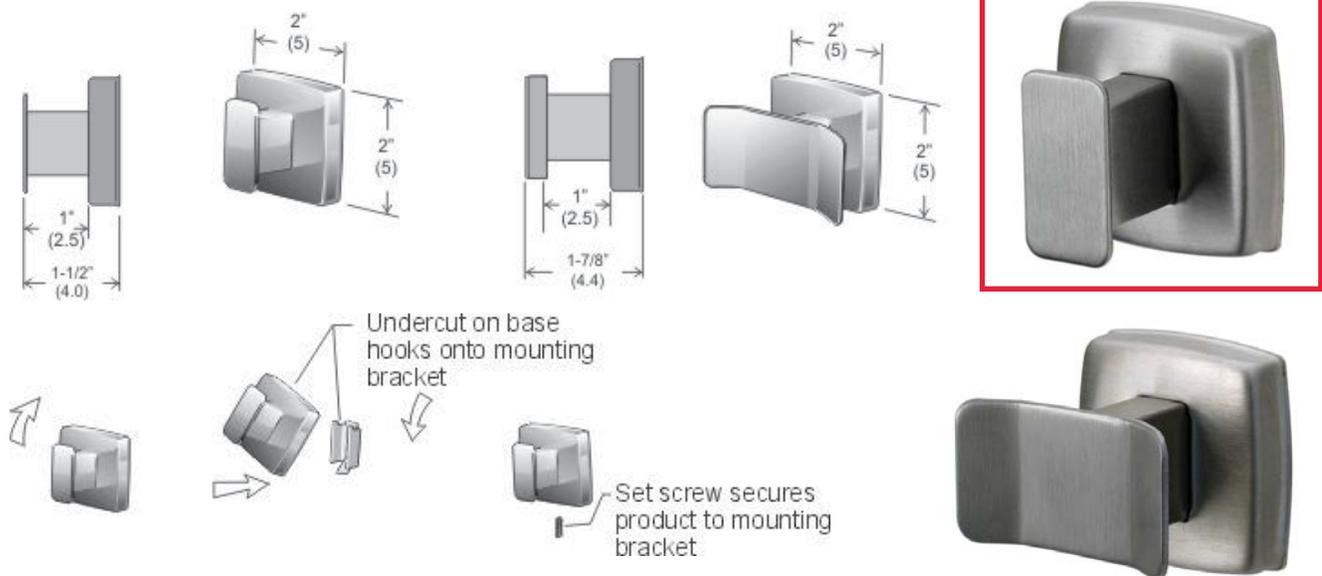

Mounting of Product: Screw concealed mounting system: The mounting bracket is attached to the wall with screws at the desired height. The unit is then hooked onto the bracket. When the set screw is tightened the product is firmly secured to the wall. The set screw applies pressure to an inclined surface on the bracket this provides a rattle free and integral mounting of the product. (mounting bracket and screws provided).

Specifications:

Material: Type 304 stainless steel no. 4 finish.

Features: Concealed mounting. Robe hook portion fabricated from 16 ga. ss type 304, no. 4 brushed finish.

Description and specifications applicable on date issued. Frost reserves the right to make improvements or changes without notice.




Hygienic Solutions at Work

Roll Toilet Tissue Dispenser


Code146: Single roll, finished in polished chrome

Code150: Double roll, finished in polished chrome

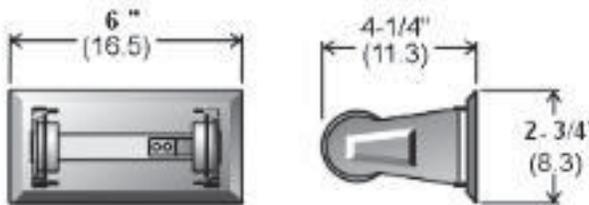

Code 146
Front View

Code 146
Side View

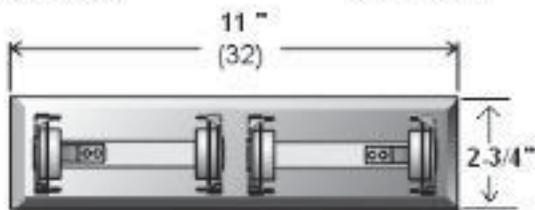

Code 150
Front View



Specifications:

Site Location: Ideal for areas requiring a heavy duty economical dispenser. Tension springs restrict paper consumption to prevent free wheeling of roll.

Dispensing: Dispenses all standard toilet tissue rolls including 4.2" x 4.5", 500 sheet rolls.

Features: Unit has concealed self locking device to prevent pilferage and vandalism. Front loading for easy service and maintenance. All welded construction of 18 ga. steel. Pivot arms hinged on hardened steel rivets. Tension springs reduce paper consumption and stops free wheeling. All surfaces finished in polished chrome.

Shipping Weight: **Code 146:** .45 kg (1 lb.), **Code 150:** .9kg (2 lbs.)

Installation: For unrestricted access, bottom of unit to floor should not exceed 44" (111.7).

Mounting screws provided.

Description and specifications applicable on date issued. Frost reserves the right to make improvements or changes without notice.



- Quality
- Value
- Service

**Tech
Reference**

Hygienic Solutions at Work

Universal Towel Dispenser

Code 101: White epoxy powder finish


Code 101-1: White epoxy powder finish with lock

Code 102: Polished chrome finish

Code 102-1: Polished chrome finish with lock

Code 103: Stainless steel type 304 No. 4 brushed finish

Code 103-1: Stainless steel type 304 No. 4 brushed finish with lock

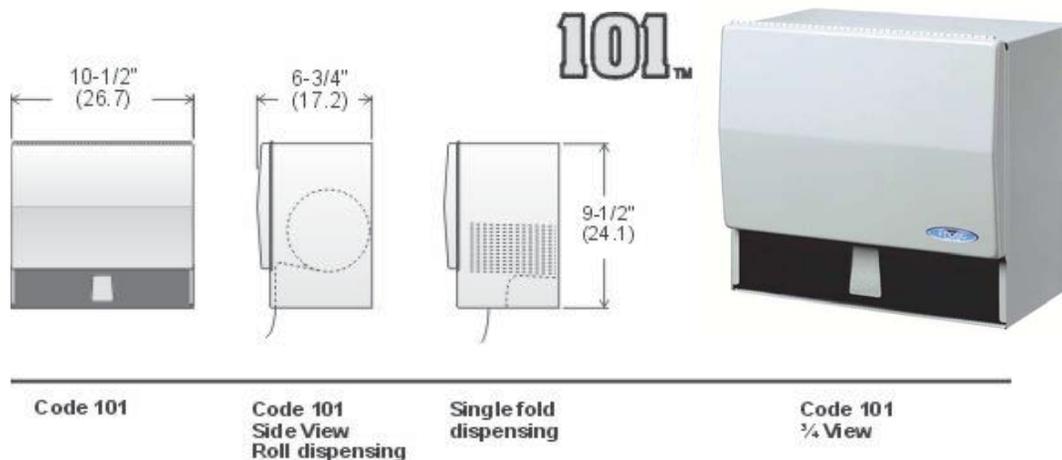

Specifications:

Site Location: The 101 series of dispensers are an industry standard and can be used in any room or site location.

Dispensing: Universal towel dispenser will accept all standard single fold and roll towels (max. 6" diameter and up to 10" long). Available with keyed tumbler lock to reduce pilferage and vandalism.

Features: Front loading for easy service and maintenance. All welded construction of 20 and 22 gauge steel. Full length piano hinge on door.

SS features: Drawn stainless steel door. All welded stainless steel (304, No. 4 brushed) construction. All doors are hinged with full length stainless steel piano hinges. Product shipped with protective plastic coating to be removed after installation.

Shipping Weight: 2.5 kg. (5-1/2 lbs.)

Installation: For unrestricted access, bottom of unit to floor must not exceed 44" (111.7).

Description and specifications applicable on date issued. Frost reserves the right to make improvements or changes without notice.





- Quality
- Value
- Service

**Tech
Reference**

Hygienic Solutions at Work

Tank Type Soap Dispenser

Code 708A: All purpose valve, vertical mounting
Code 710A: All purpose valve, horizontal mounting

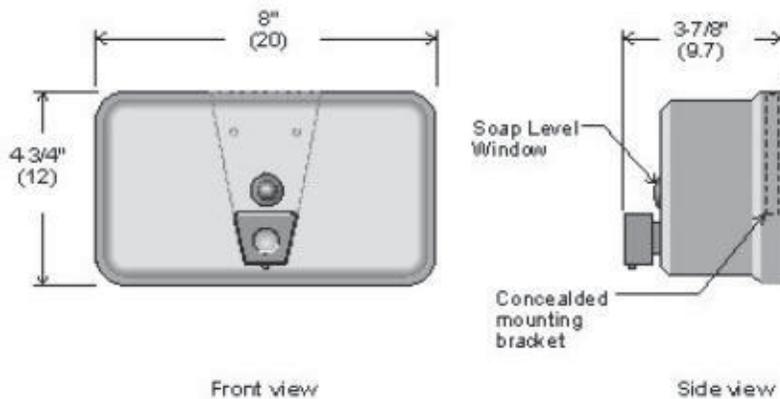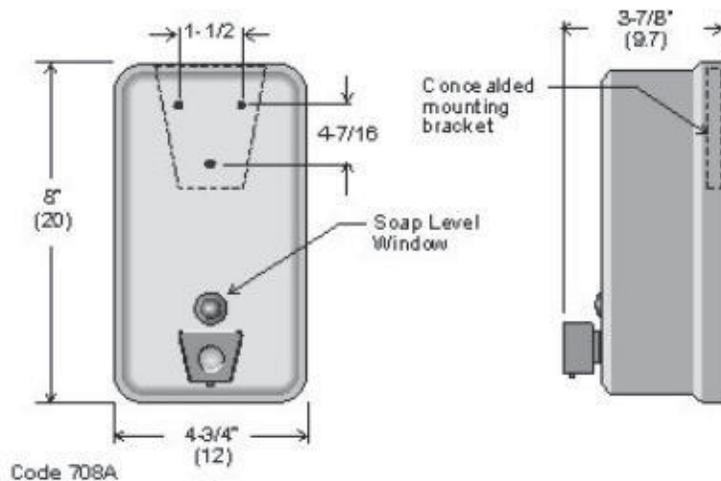

Code 710A

Specifications:

Site Location: The surface mounted unit is intended for any type of wall material or construction.

Features: Drawn and welded construction of 20 ga. stainless steel. Easy refill at top. Keyed lock filler cap. Lucite soap level indicator window. All mounting screws concealed.

Soap types: 708A, 710A: dispenses liquid soap at 10-20% solution as well as more viscous synthetic detergents, lotions and antiseptic soaps. We do not recommend any soap types that have an ammonium based surfactant, ie. Ammonium Lauryl Sulfate.

Capacity: Capacity of 1.2 kg (40 oz.).

Installation:

Secure mounting plate to wall through holes with three mounting screws provided.

Slip dispenser over mounting plate and secure with single screw through filler cap at top.

Description and specifications applicable on date issued. Frost reserves the right to make improvements or changes without notice.




- Quality
- Value
- Service

**Tech
Reference**

Hygienic Solutions at Work

Stock Series Mirrors, Fixed Tilt

Code 941-1624FT:	16"w x 24"h, fixed tilt
Code 941-1630FT:	16"w x 30"h, fixed tilt
<u>Code 941-1824FT:</u>	18"w x 24"h, fixed tilt
Code 941-1830FT:	18"w x 30"h, fixed tilt
Code 941-1836FT:	18"w x 36"h, fixed tilt
Code 941-2424FT:	24"w x 24"h, fixed tilt
Code 941-2430FT:	24"w x 30"h, fixed tilt
Code 941-2436FT:	24"w x 36"h, fixed tilt

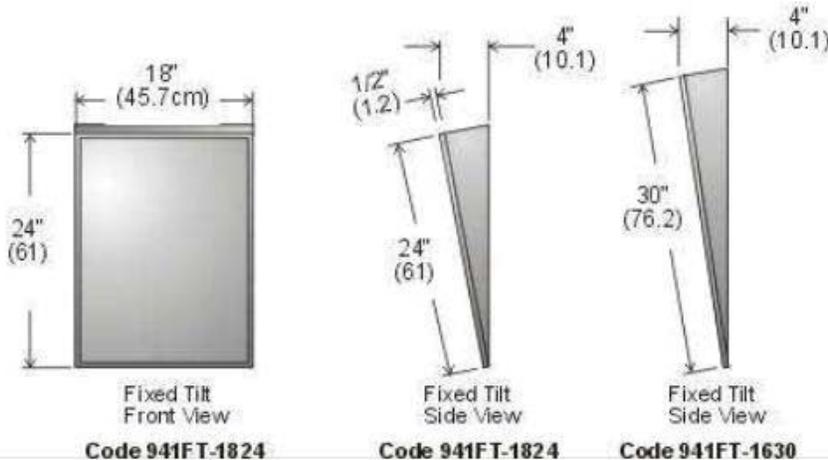

Specifications:

Site Location: The 941 fixed tilt mirror is ideal for any barrier free location.

Features: One piece 24 ga. stainless steel channel frame provides rigid assembly. Comes in bright annealed finish. Fixed tilt frame is one piece 20 ga. stainless steel. Vandal resistant concealed mounting. Mirror glass has shock resistant primary back. Full galvanized back panel.

Shipping Weight: Code 941-1824, 10 kg. (23 lbs.), shipped two per carton.

Installation: Position bottom of mirror 48" (121) from floor. Positions may vary depending on size and the type of installation.

Description and specifications applicable on date issued. Frost reserves the right to make improvements or changes without notice.




- Quality
- Value
- Service

**Tech
Reference**



Fixed Tilt Mirror Installation Guide

Code 941-FT 18"x24" shown


- 1** Insert four mounting screws into wall matching the holes centres on mirror frame. Insure they are at the correct depth as shown in fig. 1




- 2** Register mirror frame to mounting screws and press mirror firmly against the wall and pull down



Fixed Tilt Mirrors
Side View



Mounting system
deflects the metal
fingers on the back



When the metal
fingers slip back
over the screw
head, the mirror
is secured.

Specifications:

Installation: Position bottom of mirror 48" (121) from floor.
Positions may vary depending on size and the type of installation.

Description and specifications applicable on date issued. Frost reserves the right to make improvements or changes without notice.




- Quality
- Value
- Service

**Tech
Reference**

Hygienic Solutions at Work

Toilet Backrest

Code 1028: Backrest, Stainless steel finish.

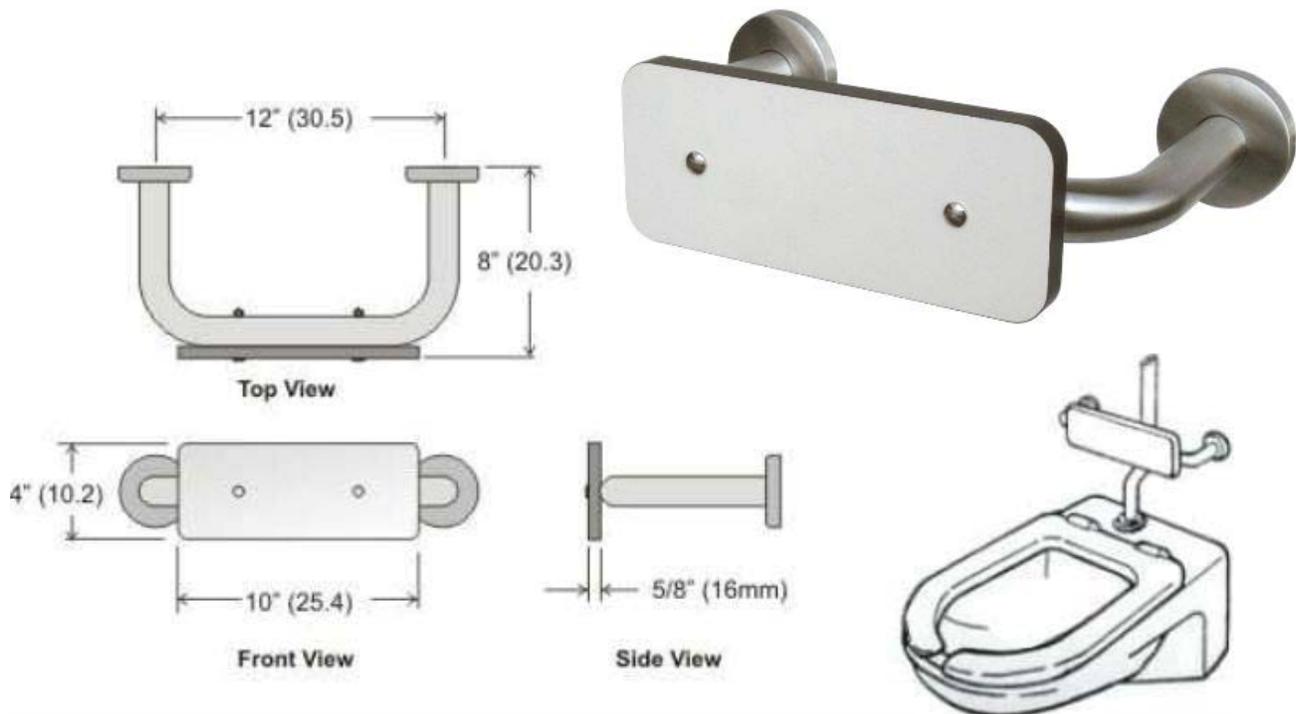

Specifications:

Site Location: For use on tank less toilet installations.

Materials: 1-1/4" (32mm) Stainless steel tube with a 0.064" wall (1.6mm). Utilizes concealed Fastening mounting. Backrest is 5/8" (16mm) solid plastic laminate (white finish).


Description and specifications applicable on date issued. Frost reserves the right to make improvements or changes without notice.



Heavy Duty Shelf

Code 950-4: Stainless Steel 18" shelf, 4" depth.
Custom lengths available up to 54" (183 cm) long.

Overall dimensions in inches (centimeters in brackets).

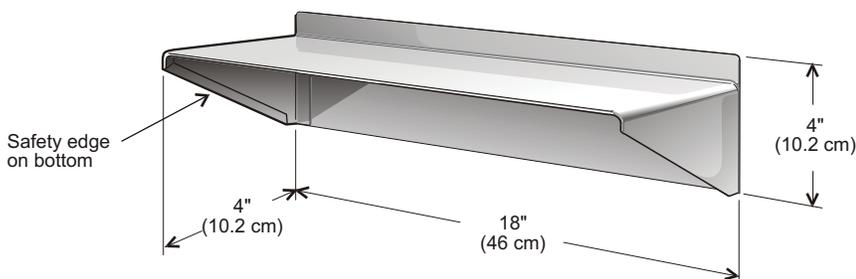

Specifications

- Site location:**
- Ideal for areas requiring 4" ADA maximum wall protrusion specifications. New rounded corner shelf design is 22 ga. Safety edge on all protruding surfaces.
- Materials:**
- Stainless steel, 22 gauge, no. 4 brushed finish shelf welded to stainless steel wall plate.
 - Custom lengths available up to 183cm (54") long.
 - Supplied with mounting screws. All mounting screw holes below shelf.