



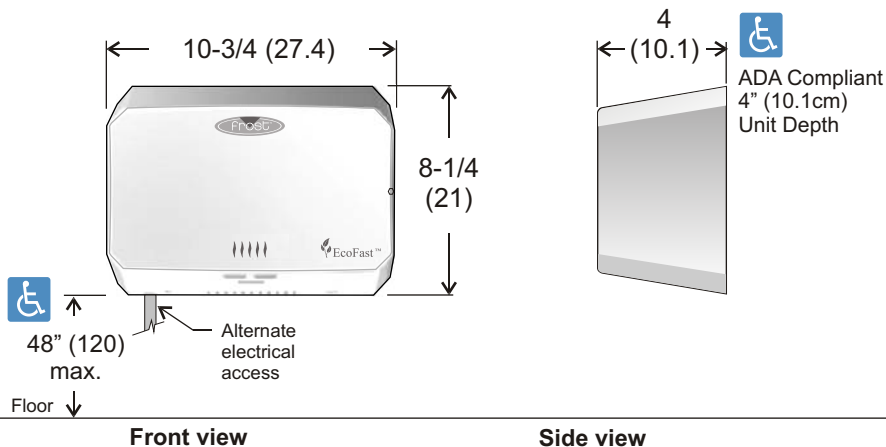

Compact, High Speed Hand Dryer, Hands Free

Code 1195: Compact, slim, high speed, hands free hand dryer, white finish.

Overall dimensions in inches (centimeters in brackets).

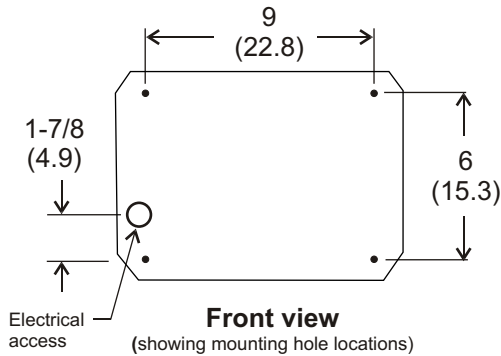

Specifications

- | | |
|---------------------------|---|
| Site location: | • These compact hand dryers are ideal for renovations and areas with 15 amp. circuits available. |
| Materials: | • Outer casing is 18 ga. drawn in white powder coat finish. |
| Power Usage: | • Whole unit is rated at 1000 watts. Heating element: 500 watts. Operating Voltage: 110-120 Vac, 50/60Hz, Amps: 1.0kw. Standby Power: Less than 0.5W. |
| Electrical Safety: | • Brush motor: .67 HP, 16k - 29k R.P.M, dual ball bearings. |
| | • Motor thermal protection: Auto resetting thermostat turns unit off at 135 deg. C (275 deg. F). |
| | • Heater Thermal Protection: Auto Resetting Thermostat turns unit off at 85 deg. C (185 deg. F). Resets at 75 deg. C (167 deg. F). Timing protection: 60 seconds auto shut off. |
| Performance: | • Drying time: 10 - 15 seconds. Sensor range: 6" (15cm). |
| | • Air speed output: 45.5 - 70 m/s (164 - 252 km/hr), 150 - 230 ft/s (102 -157 mph). |
| | • Volume: 71-102 m ³ /h, (42-60 CFM). |
| | • Sound Level: 68.9 dB-A @ 2m. Air output temperature: 55 degrees C (131 deg. F). |
| Warranty: | • Complete 5 years from date of purchase. |
| Maintenance: | • Motor and all working parts must be kept clean from excessive dirt/dust and any form of foreign debris. Failure to maintain unit may reduce performance and result in void of warranty. |
| LEED: Credit: | • Minimum Energy Performance: Design and Construction, EA Prerequisite 2 |
| | • Optimize Energy Performance: Design and Construction, EA Credit 1 |
| Shipping Weight: | • 4.2 kgs (9.2lbs) |
| Installation: | • Supplied with mounting template, instructions, screws and anchors. |

