



- Quality
- Value
- Service


**Tech
Reference**

Hygienic Solutions at Work

Disposal Fixtures

- Code 340:** Stainless type 304 fully recessed
- Code 340B:** Stainless type 304 semi recessed
- Code 340C:** Stainless type 304 surface mounted

[Download PDF](#)

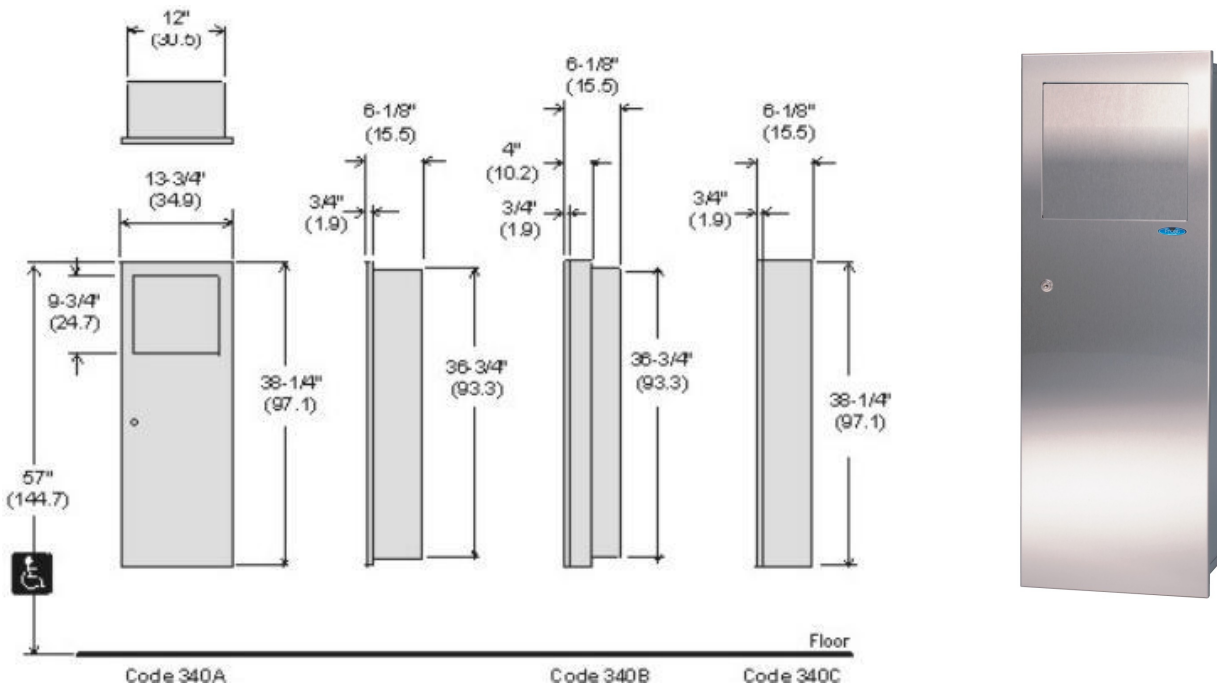

Specifications:

Site Location: Compact waste receptacle is ideal for low traffic areas.
Materials: Heavy duty 18 gauge stainless steel door (304, # 4 brushed finish). Secured with tumbler keyed lock. All doors are hinged with full length stainless steel piano hinges. Corrosion resistant galvanized steel (20 ga.). Counterbalanced stainless steel door (20 ga.) provides maximum fire protection, mounted with full length piano hinge. Removable leak proof roto moulded liner with 22.5 litre capacity (5 Imp. gal., 6 gal. US).
Installation: Code 340A: Provide 37-3/4" (94.6) high x 12-3/8" (31.5) wide x 6" (15.2) deep wall opening. **Code 340B:** Provide 37-3/4" (94.6) high x 12-3/8" (31.5) wide x 3" (7.6) deep wall opening. Collar is secured between recessed body flange and wall. Drill mounting holes as required. For unrestricted access, height of top of unit to floor must not exceed 57" (144.7).

Description and specifications applicable on date issued. Frost reserves the right to make improvements or changes without notice.

