




- Quality
- Value
- Service

**Tech
Reference**

Code 400A-70: Stainless type 304, fully recessed, extra large capacity
Code 400B-70: Stainless type 304, semi recessed, extra large capacity
Code 400C-70: Stainless type 304, surface mounted, extra large capacity

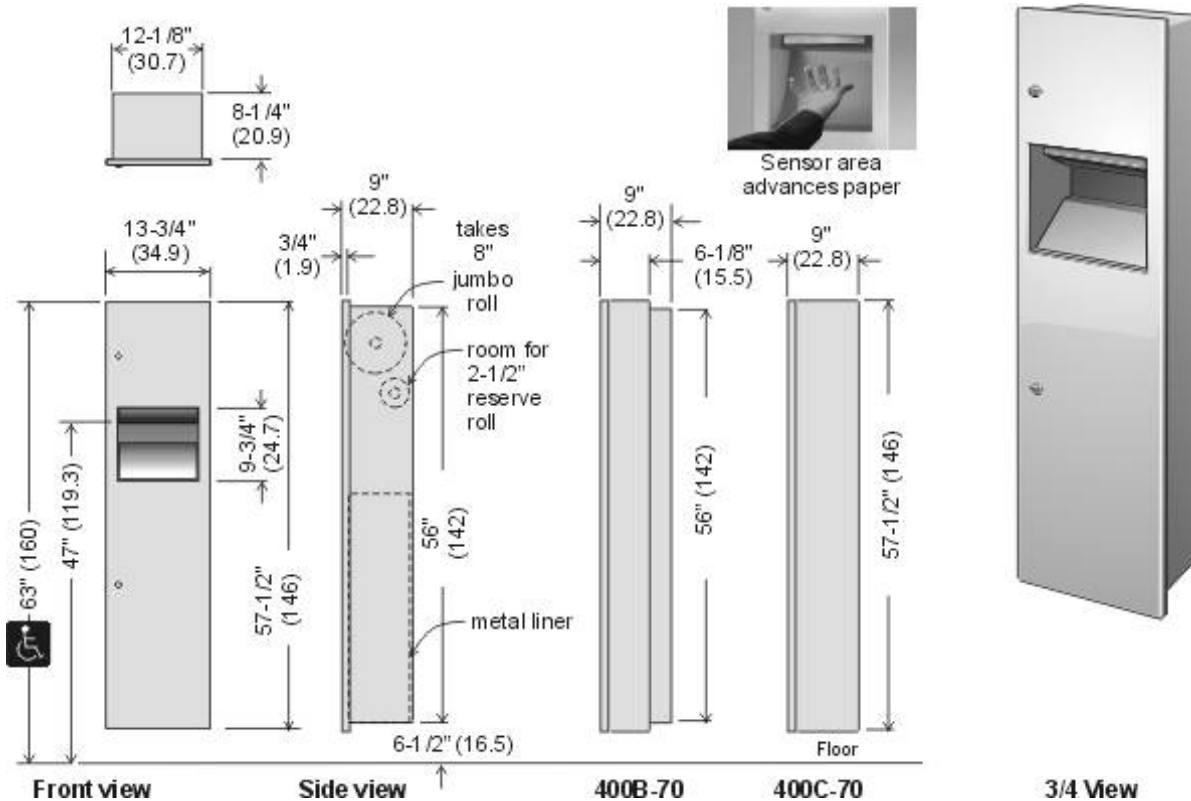

Specifications:

Site location: Extra deep combination fixture is ideal for high traffic areas.

Dispensing: Universal towel dispenser will accept jumbo roll towels max. 8" diameter (2-1/2" reserve roll). Large detection zone senses hand when placed in a natural position under dispenser to deliver a towel range length of 6-9 inches (15-23cm). Towel delivery is quiet and uniform.

Features: Hands free dispenser reduces paper flow, and provides maximum hygiene. Operates with 4 "D" size alkaline batteries or plug in AC adaptor. 4 alkaline batteries have been independently tested and found to provide 35,000 hand dries. Stainless steel (safety guarded) saw tooth cutting bar. Heavy duty 18 gauge stainless steel door (304, # 4 brushed finish). Secured with two tumbler keyed locks. All doors are hinged with full length stainless steel piano hinges. Corrosion resistant galvanized steel (20 ga.). Counterbalanced stainless steel door (20 ga.) provides maximum fire protection, mounted with full length piano hinge. Removable galvanized steel liner (26 ga.) with 47 litre capacity (10.5 gallons).

Installation: Provide 56-3/8" (148.3) high x 12-1/2" (31.7) wide x 8-1/2" (21.5) deep wall opening. Drill mounting holes as required. For unrestricted access, bottom of rough opening to floor must not exceed 6-1/2" (16.5), this will result in sensor being 47" (119.3 cm) or less from Floor.

