

## Sensor Operated TOTO® Soap Dispenser

### FEATURES

- Sensor operated foaming soap dispenser
- Self-adjusting sensor spout with base unit, mounted hardware and supply lines
- Chrome plated
- Single-hole mount
- Required to use TOTO Soap

### MODELS

- TES1ADC-05 - One spout  
Dispenser and one 1.06 gallon tank with 16' 5" (5m) tube and cord
- TES2ADC-05 - Two spouts  
Dispenser and one 1.06 gallon tank with 16' 5" (5m) tube and cord
- TES3ADC-05 - Three spouts  
Dispenser and one 1.06 gallon tank with 16' 5" (5m) tube and cord
- TES3ADC-12 - Three Spouts (Special Order)  
Dispenser and one 1.06 gallon tank and one 5.8 gallon sub tank with 39' 5" (12m) tube and cord
- TES4ADC-12 - Four Spouts (Special Order)  
Dispenser and two 1.06 gallon tanks and one 5.8 gallon sub tank with 39' 5" (12m) tube and cord
- TES5ADC-12 - Five Spouts (Special Order)  
Dispenser and two 1.06 gallon tanks and one 5.8 gallon sub tank with 39' 5" (12m) tube and cord
- TES6ADC-12 - Six Spouts (Special Order)  
Dispenser and two 1.06 gallon tanks and one 5.8 gallon sub tank with 39' 5" (12m) tube and cord

- Available:  
TOTO Soap (Sold Separately)

| Product No. | Quantity  | Packaging                       | Notes                               |
|-------------|-----------|---------------------------------|-------------------------------------|
| TSFB1       | 4 gallons | Package of 4, 1 gal. each       | Antimicrobial Soap (Fragrance Free) |
| TSFB5       | 5 gallons | Packaged as 1, 5 gal. container | Antimicrobial Soap (Fragrance Free) |
| TSFB1-GS    | 4 gallons | Package of 4, 1 gal. each       | TOTO Foam Soap Green Seal™ (Lilac)  |
| TSFB5-GS    | 5 gallons | Packaged as 1, 5 gal. container | TOTO Foam Soap Green Seal™ (Lilac)  |
| TSFB55      | 55gallons | Packaged as 1, 55 gal. drum     | Antimicrobial Soap (Fragrance Free) |



### CODES/STANDARDS

- Meets and exceeds UL1951, CSA C22.2 #68
- Certifications: UL
- Code Compliance: NEC, CEC



### PRODUCT SPECIFICATION

TOTO® Model No. \_\_\_\_\_  
Automatic infrared sensor activated, soap dispenser with 1.06 gallon soap tank and 5.8 gallon sub tank for special order. Automatic sensor adjustment on installation.

### COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel



# TES\_ADC-05 & TES\_ADC-12 Series

## Sensor Operated TOTO® Soap Dispenser

### SPECIFICATIONS


- Warranty** Three Year Warranty\*
- TOTO® Soap** TSFB1 - 4 Gallons (Package of 4, 1 gal. ea.)  
 TSFB5 - 5 Gallons (Packaged as one 5 gal. container)
- Power supply** Input: AC 120V 60 Hz  
 Output: 24V
- Length of Power Supply Cord** 51" (1.3m)
- Tank Capacity** 1.06 Gallon (Optional 5.8 Gallon tank available for total capacity of 6.8 gallons for 3 spout model or 8 gallons with 4+ spout models)
- Soap Dispensing Quantity** Factory setting at 1ml (foam)
- Length of Cord for Tank to Spout** 16' 5" (5m), special order 39' 5" (12m)
- Dispensing Timer Adjustability** Timing controlled from 0.2-20 seconds
- Detection range** 4" (110mm)

These specifications are subject to change without notice.  
 \*Failure to use TOTO Soap will void warranty.


### INSTALLATION NOTES

- Dispenser hole diameter:
- Standard = 1" ~ 1-1/8" (25 ~ 28mm)
  - With THP3140#CP Escutcheon = 1-1/8" ~ 1-1/2" (28 ~ 38mm)

TES1ADC-05

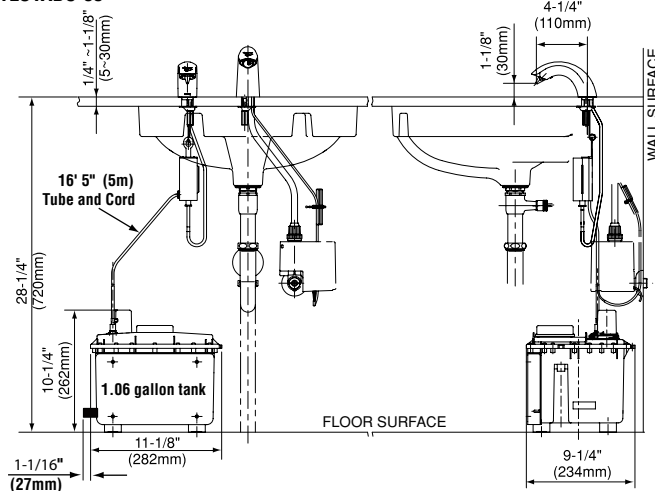

TES3ADC-12 (Special Order)

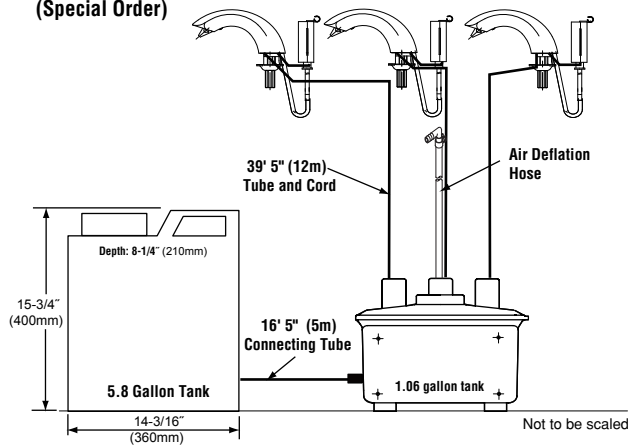

Maximum deck thickness 2" (50mm)  
 Leave 2" (50mm) extra space around the 1.06gallon tank for placement of sensor and power supply cords.

**TOTO®**

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | [www.totousa.com](http://www.totousa.com)

Printed in U.S.A. | © TOTO USA 10/



**Handy Washroom Direct**  
[www.handywashroom.com](http://www.handywashroom.com)