

**KIT FOR RECESSED MEDIFLOW STAINLESS  
STEEL AISI 304 SATIN FINISH**

**Code: KT0010CS**

**General Description**


- Kit for recessed mediflow® hand dryer (hand dryer not included).
- The kit for recessed mediflow® makes the mediflow® hand dryer suitable for the compliance of the ADAAG norm (US) –that limits to 4” the horizontal projection of the devices installed in bathrooms for public use–, bestowing on that hand dryer the quality of “specific for the disabled”.
- Maximum robustness and vandal-proofness.
- Excellent integration and aesthetical level.



**Components & Materials**

- Electro-zincated iron cabinet, 1/16” thick, with 16 screw holes of Ø 1/4” for mounting on the wall, it includes 4 M5 bolts welded on top of the base plate for the fitting of the mediflow® hand dryer.
- Grey rubber seal, offers a reinforcing outside protection that minimizes vibrations and noise.
- Stainless steel AISI 304 frame, 1/16” thick, satin finish, with 4 screw holes of Ø 23/64” for mounting on the wall.
- Nuts and bolts for the fitting of the dryer to the kit and the frame to the wall included: 4 nuts DIN 934 M5, 4 washers DIN 125 M5, 4 stainless steel screws DIN 7981 1-9/32” x 3/16” and 4 wall plugs F8.

NOTE: The nuts and bolts for the mounting of the cabinet to the wall are not included. The use of stainless steel nuts and bolts is recommended.

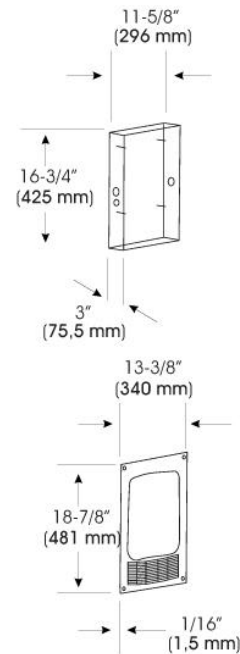

**Technical Specifications**

Cabinet Dimensions	16-3/4" x 11-5/8" x 3"	Horizontal projection of the assembly	3-9/16"
Frame Dimensions	18-7/8" x 13-3/8" x 1/16"	Wall accommodation	3" depth
Installation height – Men toilets	41" to cabinet bottom	Installation height – Children toilets	31" to cabinet bottom
Installation height – Women toilets	39" to cabinet bottom	Installation height – Disabled toilets	33" to cabinet bottom

Dim ± 4%

**Operation**

No specific instructions for its use required.

**Specification**

Kit for recessed mediflow® hand dryer should be made of electro-zincated iron cabinet, 1/16” thick, and a stainless steel AISI 304 frame, satin finish. The cabinet should be fixed means 16 screw holes of Ø 1/4” for mounting on the wall, it should include 4 M5 bolts welded on top of the base plate for the fitting of the mediflow® hand dryer. Grey rubber seal should be included to offer a reinforcing outside protection that minimizes vibrations and noise. The stainless steel AISI 304 frame should be 1/16” thick, with 4 screw holes of Ø 23/64” for mounting on the wall. Nuts and bolts for the fitting of the dryer to the kit and the frame to the wall should be included as follows: 4 nuts DIN 934 M5, 4 washers DIN 125 M5, 4 stainless steel screws DIN 7981 1-9/32” x 3/16” and 4 wall plugs F8. . Overall dimensions shall be 16-3/4” x 11-5/8” x 3” for the cabinet and 18-7/8” x 13-3/8” x 1/16” for the frame. Unit shall VDE approved and CE marked and comply with ADAAG norm (US) for the removal of architectural barriers.

Kit for recessed Mediflow® hand dryer should be model KT0010CS, frame in stainless steel AISI 304, satin finish, manufactured by Saniflow Corp., 2655 Le Jeune Road Suite 810, Coral Gables, FL 33134.

**Saniflow Corp., reserves the right to make changes and/or modifications to the products and their specifications without prior notice.**

Revision 04-2004



**Handy Washroom Direct**  
[www.handywashroom.com](http://www.handywashroom.com)